


Name _____ Date _____ Track / City _____ Event _____

FRONT SUSPENSION


Shock Position:

 1 2 3 4

Shock Stay:
 Carbon (LA417)

Lower Susp. Holder Block:
 Front _____ Rear _____

Lower Susp. Holder Spacer:
 Front _____ mm Rear _____ mm

Upper Front Stiffener:
 LA413-A LA413-X

Upper Arm Position:

 1 2 3

4.8mm Ball Stud:
 UB047S (Std)

Upper Spacer: _____ mm

Camber: _____ mm
 - +

Spacer: _____ mm

Axle-Height Spacer:
 Up
 Down

Caster Block:
 7°
 10°
 13°

Wheelbase: Front _____ mm Rear _____ mm

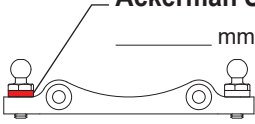
Susp. Bushing
 Wide
 Narrow (STD)

Bump Steer Spacer: _____ mm

Toe:
 In
 Out _____ °

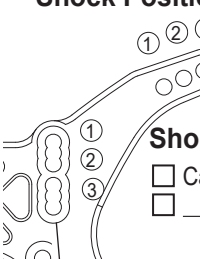
Sway Bar:
 None
 _____ mm

Ackerman Spacer: _____ mm



FRONT DIFFERENTIAL

REAR SUSPENSION


Shock Position:

 1 2 3

Shock Stay:
 Carbon (LA418)

Wing Stay Position

Susp. Holder Spacer:
 RF 0.5 1.0 None
 RR 0.5 1.0 None

Anti-Squat: _____ °

Upper Arm Position:

 1 2 3


4.8mm Ball Stud:
 UB047S (Std)

Upper Spacer: _____ mm

Camber: _____ °
 - +


Upper Spacer: _____ mm

Hub Spacer: _____ mm

Susp. Bush:


Shock Position


Lower Susp. Holder:
 RF _____ In Out
 RR _____ In Out


Hub Bush:


Drive Hub:
 4mm
 4.5mm
 5.2mm
 6.2mm (Std)

Sway Bar:
 None
 _____ mm

CENTER DIFFERENTIAL

Wheelbase:

 Front _____ mm
 Rear _____ mm

Wheelbase:

 Front _____ mm Rear _____ mm

REAR DIFFERENTIAL

SHOCKS

Front		Rear	
Piston:	_____	_____	_____
Oil:	_____	_____	_____
Spring:	_____	_____	_____
Limiters:	in _____ mm out _____ mm	in _____ mm out _____ mm	in _____ mm out _____ mm
Length (A):	_____ mm	_____ mm	_____ mm
Top Type:	<input type="checkbox"/> Alu. (UM719)	<input type="checkbox"/> UM753-1B (Std)	

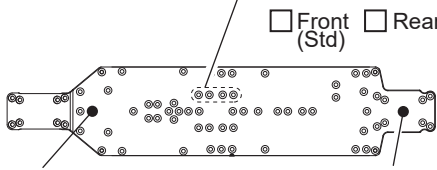


Ball End:
 Front: S M L
 Rear: S M L

Spring Cup
 Front:
 Rear:

CHASSIS

Centre Bulk
 Front Rear (Std)



Front _____ mm **Ride Height** _____ mm **Rear** _____ mm

ELECTRONICS

Motor: _____

Pinion/Spur: _____

ESC: _____

Radio: _____

Servo: _____


TIRES

Front	Rear
Tire: _____	_____
Compound: _____	_____
Insert: _____	_____
Wheel: _____	_____

BODY & WING

Body: _____ **Wing Dum Height:** _____ mm

Wing: _____ **Wing Angle:** 4° 7° 10° **Lip Height:** _____ mm



MATERIAL

Screw: Steel Titanium

Pinion Gear: Steel Aluminium

Shock O-Ring: O-ring X-ring Red Clear

TRACK CONDITION

<input type="checkbox"/> Smooth	<input type="checkbox"/> Sandy
<input type="checkbox"/> Bumpy	<input type="checkbox"/> Soft Dirt
<input type="checkbox"/> Low Traction	<input type="checkbox"/> Grass
<input type="checkbox"/> Med. Traction	<input type="checkbox"/> Blue Groove
<input type="checkbox"/> High Traction	<input type="checkbox"/> Clay
<input type="checkbox"/> Wet	<input type="checkbox"/> Dusty
<input type="checkbox"/> Dry	<input type="checkbox"/> _____