



SET-UP SHEET



DATE: 3/23/97
 DRIVER: Matt Francis
 TRACK: SRS Arizona (Cactus)

FRONT SUSPENSION

(CIRCLE OR CHECK CORRECT SETTINGS)

FRONT SPINDLE CARRIERS: 25°, 30°

TOE-IN / TOE-OUT: 1 °


FRONT RIDE HEIGHT: Arms level

FRONT CAMBER: \ominus 1 °

SWAY BAR: NO, YES - SIZE: _____

NOTES: 1/4 oz. insode bulkhead

FRONT SHOCKS
 OIL: 30
 PISTON: 57 DRILLED / STANDARD
 SPRING: Blue
 LIMITERS: INSIDE- .090" , OUTSIDE- Ø

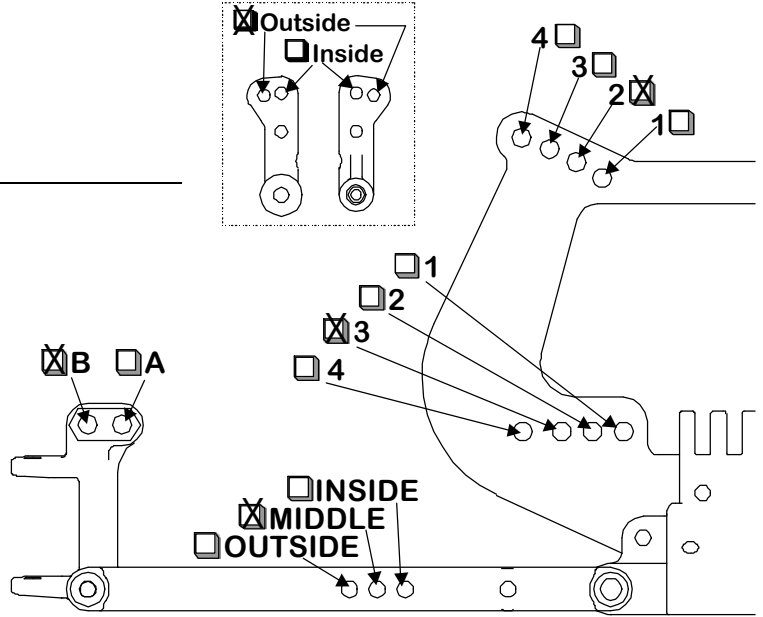

REAR SUSPENSION

PIVOT SUPPORT: 0°, 2°


REAR RIDE HEIGHT: Dogbones level

REAR CAMBER: \oplus 3 °

SWAY BAR: NO, YES - SIZE: _____

NOTES: Hubs centered

REAR SHOCKS
 OIL: 35
 PISTON: 56 DRILLED / STANDARD
 SPRING: Pink
 LIMITERS: INSIDE- 'B' spacer , OUTSIDE- piston

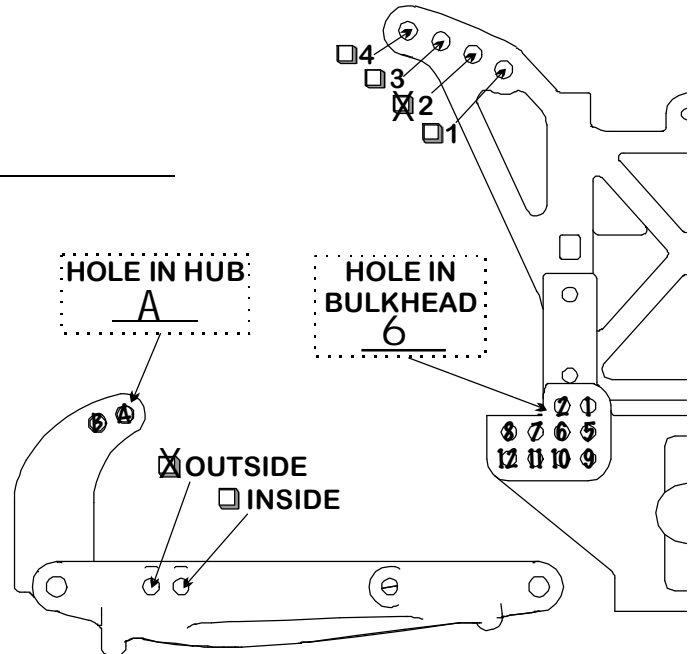

TRANSMISSION & CHASSIS

HYDRA-DRIVE: NO, YES - FLUID: LIGHT, STD., HEAVY

FRONT TIRE: Wide Body H.T., GOLD, SILVER

REAR TIRE: Sprint H.T., GOLD, SILVER

CHASSIS: SHORT, STANDARD, LONG, X-LONG

BATTERY: 6 CELL, 7 CELL BATTERY PLACEMENT: 1/4" Back

TRANSMISSION: 2.19, 2.61

MOTOR: 13 x 2

PINION GEAR: 22

SPUR GEAR: 84