

Setup Sheet

Track: _____

Driver: _____

Date: _____

☐ Indoor
☐ Outdoor

☐ Smooth
☐ Rough

☐ Slippery
☐ High-Bite
☐ Blue-Groove

☐ Tight / ☐ Open

FRONT SUSPENSION *(Circle or Check the Appropriate Settings)*

Toe ☐ In _____°
☐ Out _____°

Ride Height _____

Camber ☐ - _____°
☐ + _____°


Caster ☐ Stock _____°
☐ Other _____°

Sway Bar ☐ No
☐ Yes size _____

of washers under steering / tie-rod ball studs

Spindle ball stud: _____

Bellcrank ball stud: _____



of washers under ball stud: _____

☐ 1
☐ 2
☐ 3

Front Shocks

Oil: _____

Piston: _____ ☐ Standard / ☐ Drilled

Spring: _____


Limiters: ☐ Inside- _____ ☐ Outside- _____

Spindle Height

☐ Top
☐ Middle
☐ Bottom

Axle Spacer

☐ Narrow - inside
☐ Wide - outside

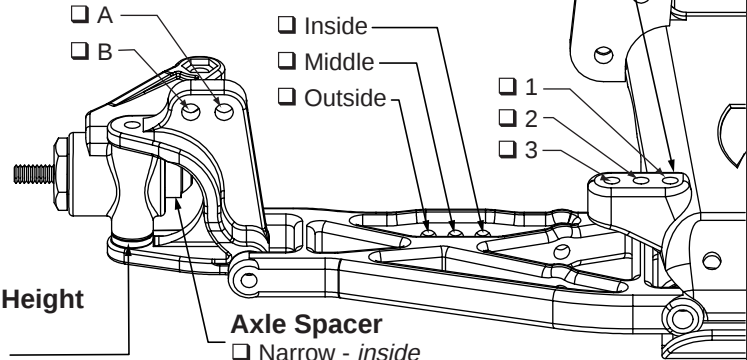

REAR SUSPENSION

Toe-In ☐ Inside _____°
☐ Outside _____°

Pivot Support ☐ No Shim
☐ Shim Under Front
☐ Shim Under Rear > # of shims: _____

Ride Height _____

Camber ☐ - _____°
☐ + _____°

Rear Hub Spacing ☐ Forward
☐ Center
☐ Rear

Sway Bar ☐ No
☐ Yes size _____

Drive Shafts ☐ Dogbones ☐ Aluminum
☐ CVDs ☐ Steel

Outdrives ☐ Steel
☐ Plastic

Wing Position

☐ Forward
☐ Back

Wing Mount

☐ Top
☐ Bottom

☐ 4
☐ 3
☐ 2
☐ 1

☐ 1
☐ 2
☐ 3


Rear Shocks

Oil: _____

Piston: _____ ☐ Standard / ☐ Drilled

Spring: _____

Limiters: ☐ Inside- _____ ☐ Outside- _____

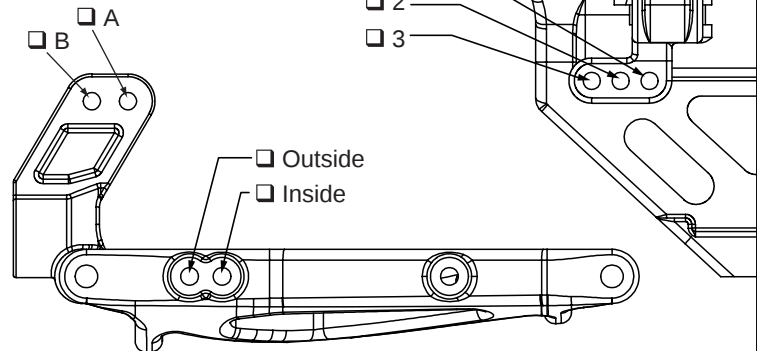

Tires

Front: _____ Compound _____ Foam _____
Rear: _____ Compound _____ Foam _____

Motor: _____ Pinion/Spur: _____ / _____

Battery Position: _____

Notes: _____