



SETUP SHEET

Driver: Ellis Stafford

Date: June 04

Track: Stotfold/Bury metro astro turf

☐ Indoor	☐ Smooth	☐ Slippery
☒ Outdoor	☒ Rough	☒ High-Bite
☒ Tight / ☐ Open		☐ Blue-Groove

FRONT SUSPENSION (Circle or Check the Appropriate Settings)

Toe ☐ In ☒ Out 1

Ride Height Arms level

Camber ☒ - ☐ + 1

☒ Stock ☐ Other _____

Caster ☐ No ☒ Yes

Sway Bar ☐ Yes size: _____

of washers under steering/tie-rod ball studs

Spindle ball stud: 1


Bellcrank ball stud: 0

Spindle Location

- ☒ Top
☐ Middle
☐ Bottom

☐ A

☒ B



of washers under ball stud 2

Axle Spacer

- ☒ Narrow - inside
☐ Wide - outside

- ☐ Inside
☒ Middle
☐ Outside

- ☐ 1
☒ 2
☐ 3

Front Shocks

Oil: 40 wt

Piston: Orange ☒ Standard / ☐ Drilled

Spring: Green Internal: ☐ Yes / ☐ No

Limiters ☐ Inside- _____ ☐ Outside- _____

REAR SUSPENSION

Body: BK2

Wing: BK2

Toe-In ☒ Inside Std ☐ Outside _____

☒ No Shim

Pivot Support ☐ Shim Under Front — # of shims: _____

Ride Height Drive shaft just below level

Camber ☒ - ☐ + _____

Drive Shafts ☒ Dogbones ☐ Aluminum ☒ Steel

Rear Hub Spacing ☐ Forward ☐ Center ☒ Rear

Sway Bar ☐ No ☐ Yes size: _____

Rear Shocks

Oil: 35 wt

Piston: Blue ☒ Standard / ☐ Drilled

Spring: Pink Internal: ☐ Yes / ☒ No

Limiters: ☐ Inside - _____ ☐ Outside - _____


Wing Position Wing Mount

- ☒ Forward
☐ Back

- ☐ Top
☒ Bottom

- ☐ 4
☐ 3
☒ 2
☐ 1

- ☐ 1
☒ 2
☐ 3

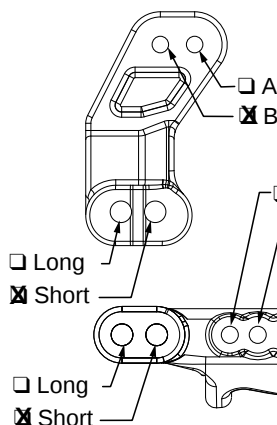

- ☐ Outside
☒ Middle
☐ Inside

- ☒ Outside
☐ Inside

Tires

Front: Slim mini

Rear: Mini Spike

Compound

Yellow

Yellow

Foam

Hard

Soft

Motor: 10 x 1 Pinion/Spur: 23 / 78

Battery Position: Forward

Weather Conditions/Notes: Very Hot and dry very grippy