

SETUP SHEET

Track:

Driver: _____

☐ Indoor
☐ Outdoor

☐ Smooth
☐ Rough

☐ Slippery
☐ High-Bite

☐ Blue-Groove

Date: _____

☐ Tight / ☐ Open

XXX-SCT

FRONT SUSPENSION *(Circle or Check the Appropriate Settings)*

☐ In _____ °
 Toe ☐ Out _____ °

Ride Height _____

 Camber ☐ - _____ °
☐ + _____ °

 Caster ☐ Stock _____ °
☐ Other _____ °



 Sway Bar ☐ No
☐ Yes size: _____

of washers under steering / tie-rod ball studs

Spindle ball stud: _____

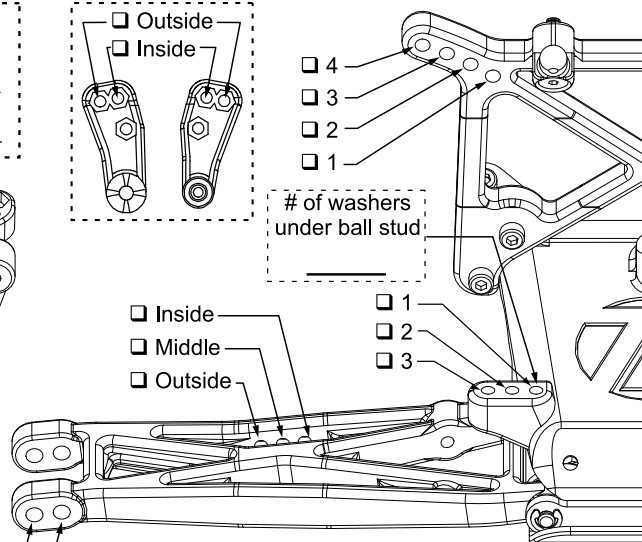
Bellcrank ball stud: _____

Spindle Location

☐ A
☐ B
☐ C
☐ Top
☐ Middle
☐ Bottom

☐ 4
☐ 3
☐ 2
☐ 1

of washers under ball stud: _____

☐ Inside
☐ Middle
☐ Outside

☐ 1
☐ 2
☐ 3

☐ Long
☐ Short

Front Shocks

Oil: _____

 Piston: _____ ☐ Standard / ☐ Drilled

 Spring: _____ Internal: ☐ Yes / ☐ No

 Limiters: ☐ Inside- _____ ☐ Outside- _____

REAR SUSPENSION

Alterations by Arn0 at PetitRC dot com

☐ Inside _____ °
 Toe-In ☐ Outside _____ °

 Pivot Support _____ ☐ No Shim
☐ Shim Under Front
☐ Shim Under Rear > # of shims: _____

Ride Height _____

 Camber ☐ - _____ °
☐ + _____ °

 Drive Shafts ☐ Dogbones ☐ Aluminum
☐ CVDs ☐ Steel

 Rear Hub Spacing ☐ Forward
☐ Center
☐ Rear

 Outdrives ☐ Steel
☐ Plastic

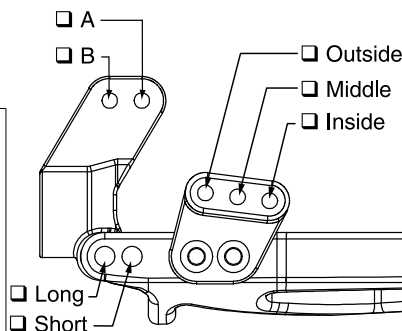
 Sway Bar ☐ No
☐ Yes size _____

Rear Shocks

Oil: _____

 Piston: _____ ☐ Standard / ☐ Drilled

Spring: _____

 Limiters: ☐ Inside- _____ ☐ Outside- _____

☐ 4
☐ 3
☐ 2
☐ 1

☐ 1
☐ 2
☐ 3

Tires

Compound

Foam

Front: _____

Rear: _____

Motor: _____ Pinion/Spur: ____ / ____

Battery Position: _____

Weather Conditions/Notes: