

Name: Todd Huss

Date: 8/30/09

Event:

City: Charleston

State: SC


Track: -

Track ☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove ☐ Wet ☐ Low Bite ☐ High Bite
Conditions ☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy ☐ Dry ☐ Dusty ☐ Med Bite ☐ Other _____



Front Suspension

Toe: _____
Ride Height: _____
Camber: -1°
Caster: 30° (Stock)
Sway Bar: None
Oil: 32.5 wt (8/30/09)
Piston: 57 Black Other: (stock)
Spring: 3.2 Silver (Front Buggy) / (stock)
Limiters: Inside: .21 Outside: /
Spindle Height: _____
Axle Spacer: _____
Axle Spacer Size: Stock
Steering Type: Bellcrank - Outside
Bump Steer: _____ Ackerman Washers: _____
Camber Link: 2 B Ball Stud Washers: _____
Shock Location: 2 Inside
VLA: Long

Rack Type





Bellcrank Type

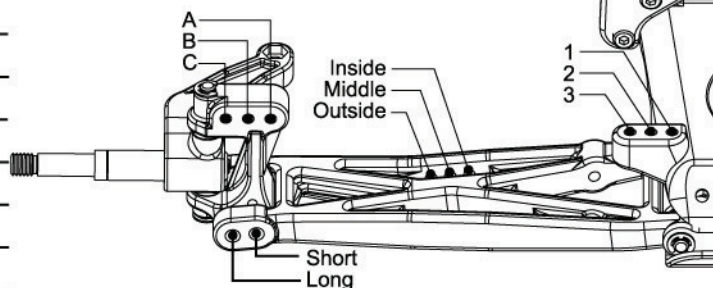

Notes: Check left front limiter...may be larger


Rear Suspension

Toe: _____
Pivot Support: 2° 0.03 under rear
Ride Height: _____
Camber: -1°
Rear Hub Spacing: Front - 2 spacers back (stock=1 fr, 1 bk)
Drive Shafts/Outdrives: _____/
Sway Bar: None
Oil: 32.5 wt
Piston: 55 Orange Other: (stock)
Spring: 2.3 Pink /
Limiters: Inside: None Outside: None
Camber Link: 1 D Ball Stud Washers: 0.09
Shock Location: 4 Outside
VLA: Long (outside upper hole)
Wing Width & Height: _____/
Body Type: Stock (reinforced w/shoe goo)
Battery Position: 2 foams back, 1 foam front



Notes: 1 washer under rear pivot support
.03 = ball stud washer

Weight Placement
(Mark with "X")

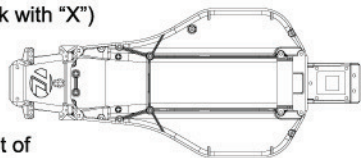

Weight of
each piece _____ oz.

Tires: Type Compound Insert Additive Motor: Cast. 5700
Front: Stock 6 Rib Spur: 88
Rear: Step Pin Red Pinon: 14

Notes: Sidewinder ESC: 1) 3(f/b/r); 2) 2(50% br); 3) 1(br 50%); 4) 2(punch med accel);
5) 3(20% drag br); 6) 2(start normal default); 7) 2(auto lipo cutoff); 8) 1(low motor
time); 9) 1(brushless)