

Name:	Date:	Event:
City:	State:	Track:




Track ☐ Dirt ☐ Carpet ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Dry Grip Level: ☐ Low ☐ Medium ☐ High
 Conditions: ☐ Clay ☐ Astro Turf ☐ Open ☐ Rough ☐ Loamy ☐ Wet Tread Level: ☐ Pin ☐ Ghost Pin ☐ Slicks

Front Suspension

Toe: _____ Camber: _____
 Ride Height: _____ Caster Block: ☐ 0° ☐ 5°
 Kick Shim(s): ☐ 2mm ☐ 1mm ☐ Wedge(20°) ☐ Other: _____
 VLA Setting: ☐ Short Arm ☐ Long Arm
 Front Pivot: ☐ Alum ☐ Composite ☐ Brass ☐ _____
 Pivot Height: ☐ SLRC ☐ LRC ☐ MRC ☐ HRC
 Piston: _____ Oil: _____
 Limiters: Internal: _____ External: _____ Stroke: _____
 Shock Eyelet: ☐ Std. ☐ +2 Shock Location: _____
 Spring: _____ Sway Bar: _____
 Spindle Steering Arm: ☐ 4 ☐ 5 ☐ 6 ☐ _____
 Spindle Ball Stud: ☐ Standard ☐ Low Spacers: _____
 Draglink Ball Stud: ☐ Standard ☐ Low Spacers: _____
 Axle Spacing: ☐ 0 ☐ +.5mm ☐ +1mm
 Trail: ☐ 2mm ☐ 3mm ☐ 4mm
 Camber Link, Inner: ☐ 1 ☐ 2 ☐ 3 Outer: ☐ A ☐ B
 Tower: ☐ Stiffezel ☐ Carbon ☐ Carbon +2mm ☐ _____
 Mud Guard: ☐ Soft ☐ Standard ☐ Stiffezel
 Front Wheels: ☐ Standard ☐ Stiffezel
 Front Wing: ☐ Low ☐ High Narrow ☐ High Wide

Stiffezel Parts:


☐ Front Arm ☐ Rear Arm
☐ Chassis Brace/Waterfall
☐ _____

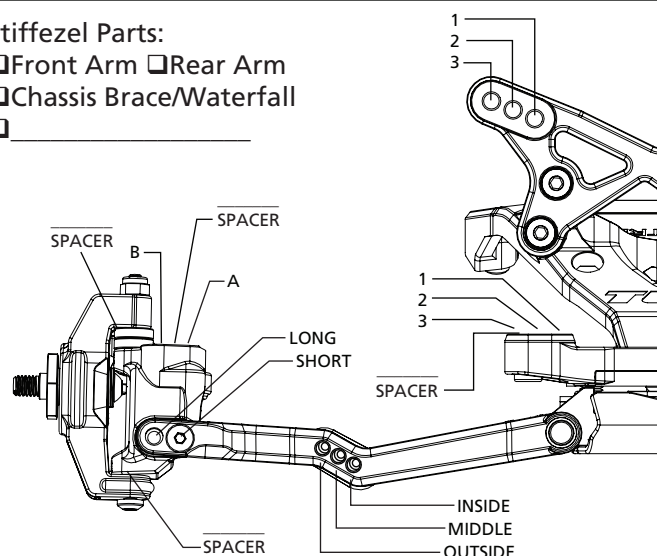

Notes: _____

Rear Suspension

Configuration: ☐ Laydown ☐ Standup
 Diff. Height: ☐ 0 ☐ +1 ☐ +1.75 ☐ + 2.5 ☐ +3.5
 Axle Height: ☐ 0 ☐ +3 ☐ _____
 Toe Plate: ☐ LRC ☐ LRC -2° ☐ HRC ☐ HRC -2°
 Toe Inserts: ☐ 2.5 ☐ 3.0 ☐ 3.5 ☐ 4.0 Arrow: ☐ In ☐ Out
 Anti-Squat Inserts: ☐ 0 ☐ 0.5 ☐ 1 ☐ 1.5 ☐ 2 ☐ 2.5 ☐ 3
 Ride Height: _____ Camber: _____
 Hub Spacing: _____ Fr _____ Rr Hex Width: _____
 Piston: _____ Oil: _____
 Spring: _____ Sway Bar: _____
 Limiters: Internal: _____ External: _____ Stroke: _____
 Shock Eyelet: ☐ Std. ☐ +2 Shock Location: _____
 Shock Mounting: ☐ Front ☐ Rear
 Tower: ☐ Stiffezel ☐ Carbon ☐ Carbon +2mm ☐ _____
 Camber Block Spacer: ☐ 1mm ↓ ☐ 0mm ☐ 1mm ↑
 Camber Link, Inner: ☐ 1 ☐ 2 ☐ 3
 Camber Link, Outer: ☐ A ☐ B ☐ C ☐ D ☐ E
 Battery Position: ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ _____
 Wing/Wickerbill: _____
 Wing Angle: ☐ 0° ☐ 2° ☐ 4°
 Diff Type: ☐ Ball ☐ Gear Setting: _____
 Driveshaft Length: ☐ CVA ☐ Universal Length: _____
☐ Direct Drive ☐ Slipper Pads: ☐ Torque (yel) ☐ Drive (org)

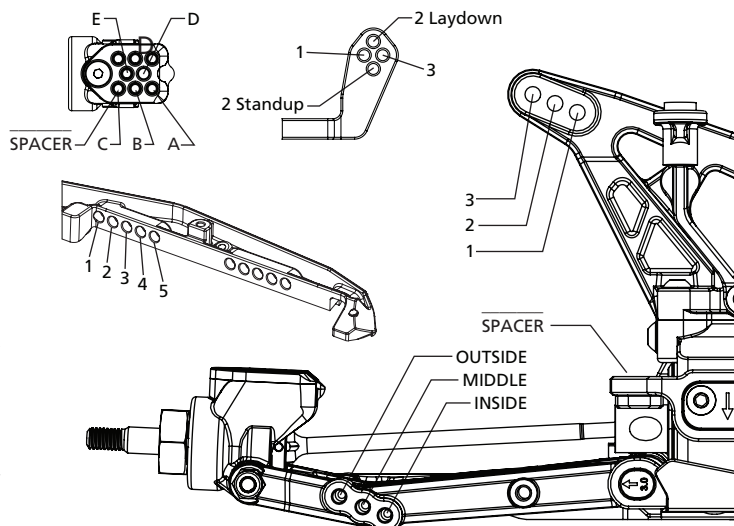

Electronics


Radio: _____	Timing Advance: _____
Servo: _____	Steering Expo: _____
ESC: _____	Throttle/Brake EPA: _____
Initial Brake: _____	Motor: _____
Drag Brake: _____	Pinion: _____ Spur: _____
Throttle Profile: _____	Battery: _____
	Battery Weight: _____

Tires

	Front	Rear
Thread:	_____	_____
Compound:	_____	_____
Insert:	_____	_____
Sauce:	_____	_____

Notes: _____

Chassis

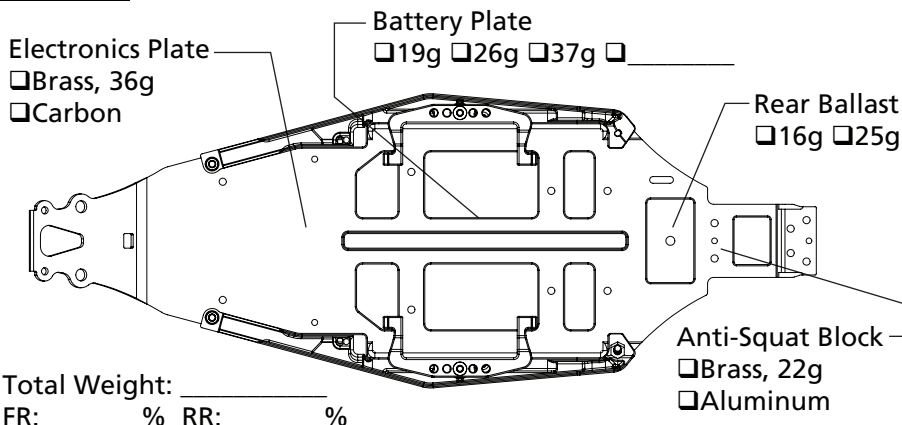

Total Weight: _____
 FR: _____% RR: _____%