

Name: _____		Date: _____ Event: _____	
City: _____ State: _____		Track: _____	
Track Conditions	☐ Indoor ☐ Outdoor	☐ Tight ☐ Open	☐ Smooth ☐ Rough
	☐ Hard Packed ☐ Loose/Loamy	☐ Blue Groove ☐ Dry	☐ Wet ☐ Dusty
	☐ Grass ☐ Astro Turf	☐ Low Bite ☐ Med Bite	☐ High Bite ☐ Other _____

Front Suspension

Toe: _____

Ride Height: _____

Camber: _____

Caster: ☐ 10° ☐ 12° ☐ 15° ☐ 20°

Sway Bar: _____

Oil: _____

Piston: _____

Spring: ☐ Standard ☐ Low Freq. Color: _____

Shock Limiters: _____

Shock Location: _____


Bump Steer Ball Stud: ☐ Standard ☐ Low Mount

Bumper Steer Spacers: _____

Camber Link: _____

Ackermann: _____

Notes: _____

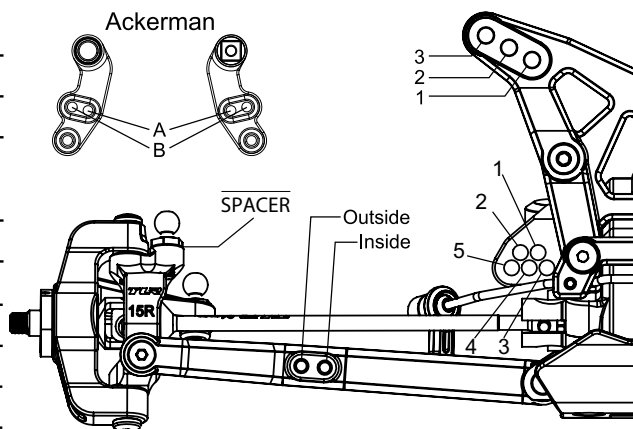

- ☐ TLR331012 Aluminum Servo Mount
- ☐ TLR334007 Aluminum Front Spindle
- ☐ TLR334009 Aluminum Steering Bellcrank
- ☐ TLR234045 Front Pivot Brace, Steel

Rear Suspension

Toe: _____

Anti-Squat: _____

Roll Center: ☐ Low Roll Center (LRC) ☐ High Roll Center (HRC)

Ride Height: _____

Camber: _____

Rear Hub Spacing: _____

Hex Width: _____

Sway Bar: _____

Oil: _____

Piston: _____

Spring: ☐ Standard ☐ Low Freq. Color: _____

Shock Limiters: _____


Camber Link: _____

Shock Locations: _____

Wing/Wickerbill: _____

Battery Position: _____

Notes: _____

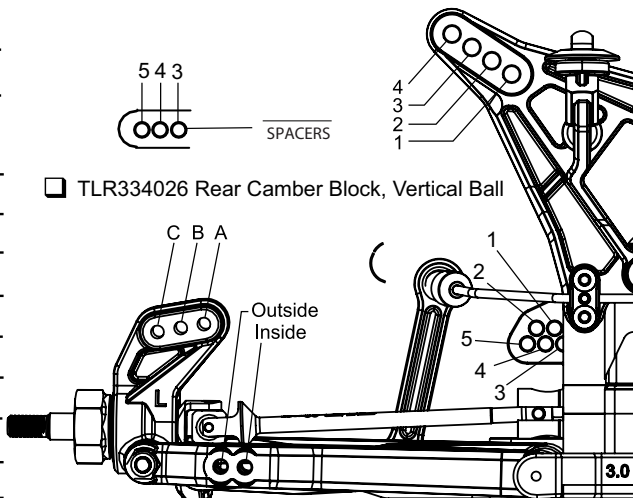

- ☐ TLR334026 Rear Camber Block, Vertical Ball

- ☐ TLR334008 Aluminum Rear Hub

Electronics

Radio: _____	Timing Advance: _____
Servo: _____	Throttle/Brake Expo: _____
ESC: _____	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: _____
Throttle Profile: _____	Pinion: _____ Spur: _____
	Battery: _____

Tires

	Compound	Insert	Additive
Front: _____	_____	_____	_____
Rear: _____	_____	_____	_____
Notes: _____			