

Name: _____		Date: _____		Event: _____	
City: _____		State: _____		Track: _____	
Track Conditions	☐ Indoor	☐ Tight	☐ Smooth	☐ Hard Packed	☐ Blue Groove
	☐ Outdoor	☐ Open	☐ Rough	☐ Loose/Loamy	☐ Dry
	☐ Wet	☐ Grass	☐ Low Bite	☐ High Bite	
	☐ Dusty	☐ AstroTurf	☐ Med Bite	☐ Other _____	

FRONT SUSPENSION

Toe: _____

Ride Height: _____

Camber: _____

Caster: ☐ 0° ☐ 5° Trail: ☐ 2mm ☐ 4mm

Kick Angle: ☐ 20° ☐ 25° ☐ 30°

Oil: _____

Piston: _____

Spring: ☐ Standard ☐ Low Freq. Color: _____

Front Pivot: ☐ Aluminum ☐ Plastic ☐ HRC

Kick Shim: ☐ Brass ☐ Plastic

Shock Limiters: _____ Stroke: _____

Shock Location: _____

Steering Type: ☐ Slide Rack ☐ Bell Cranks


Spindle Ball Stud: ☐ Standard ☐ Low Mount

Bumper Steer Spacers: _____

Ackermann Ball Stud: ☐ Standard ☐ Low Mount

Ackermann Spacers: _____

Camber Link: _____

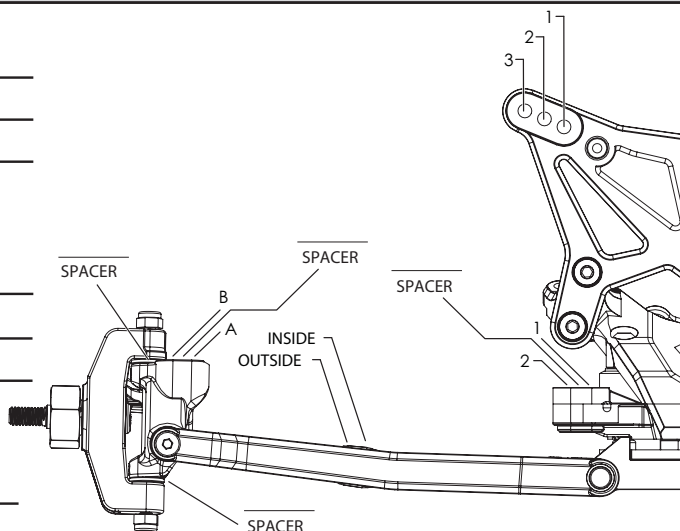

Notes: _____

REAR SUSPENSION

Chassis Configuration: ☐ Rear Motor ☐ Mid Motor

Toe: _____

Anti-Squat: _____

Roll Center: ☐ Low Roll Center (LRC) ☐ High Roll Center (HRC)

Ride Height: _____

Camber: _____

Rear Hub Spacing: _____

Hex Width: _____

Oil: _____

Piston: _____

Spring: ☐ Standard ☐ Low Freq. Color: _____


Shock Limiters: _____ Stroke: _____

Camber Link: _____

Shock Locations: _____

Body/Cut Outs: _____

Battery Position: _____

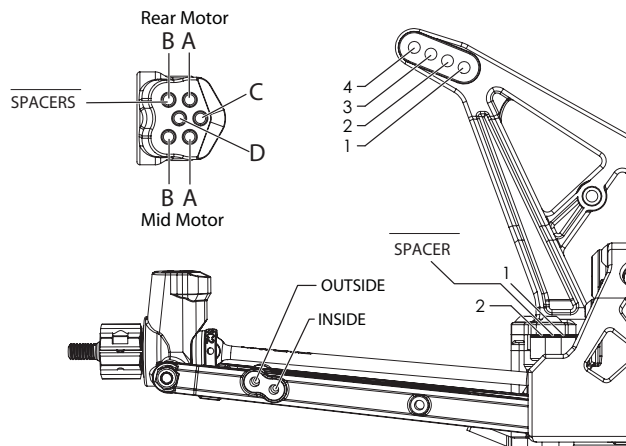

ELECTRONICS

Radio: _____	Timing Advance: _____
Servo: _____	Throttle/Brake Expo: _____
ESC: _____	Servo Expo: _____
Initial Brake: _____	Throttle/Brake E PA: _____
Drag Brake: _____	Motor: _____
Throttle Profile: _____	Pinion: _____ Spur: _____
	Battery: _____

WEIGHT PLACEMENT


TIRES

Tread

Compound

Insert

Additive



Front: _____

Rear: _____

Notes: _____