

Name: Jerome Treignier

Date: June 2013

Track: ROAR Nats / gulf coast rc TX

Track Conditions

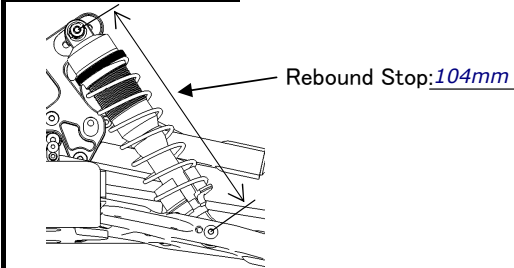
Size: ☐ Open ☒ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☒ Low
Surface: ☒ Smooth ☐ Med. ☐ Bumpy

Result

Race Time / Lap: _____


Best Lap (1Lap): _____

Front Suspension


Rebound Stop: 104mm

Tension Rod: ☒ E2107A(Long)
☐ E2107B(Short)

Upper Arm Position:

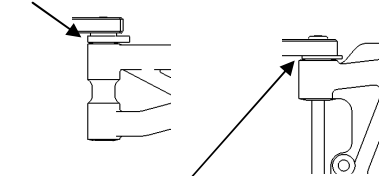

Ride Height: 24

Toe Angle: 1 °


Kingpin Ball Spacer: 1mm

Wheel Hub: +1mm

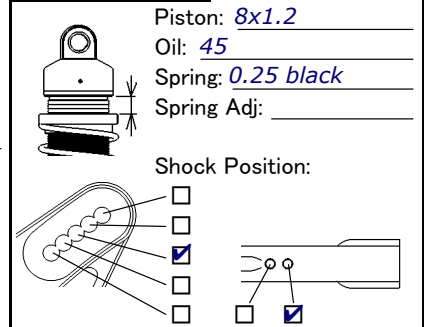
Anti Roll Bar: 2.2

Upper Arm Spacer: 2mm

Lower Arm Spacer: 0mm

Lower Arm Position (Kick Up):



Front Shocks


Piston: 8x1.2

Oil: 45


Spring: 0.25 black

Spring Adj: _____

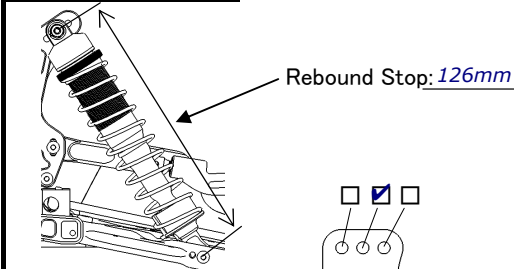
Shock Position:

Pivot Ball Position: ☒ Front ☐ Rear
Damper Stay: ☒ E2502(Aluminum)
☐ E2511(CFRP)

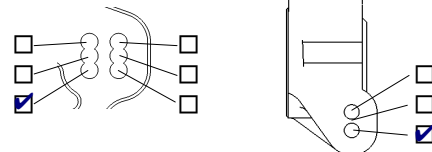
Steering Ackerman




Rear Suspension


Rebound Stop: 126mm

Upper Arm Position:



Lower Arm Position (Anti-Squat):


Ride Height: 28

Camber Angle: 3 °

Wheel Hub: +1mm

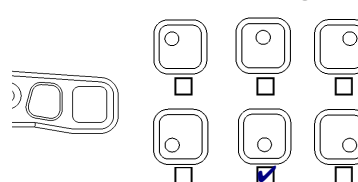
Anti Roll Bar: 2.7

Lower Arm Spacer: 1mm

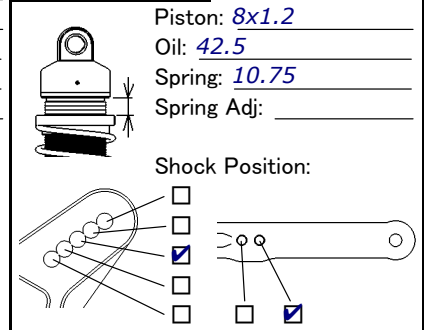
Upright Spacer: 2mm

Upright: ☒ E2106-B
☐ E2118(Aluminum)

Lower Arm Position (Toe Angle):



Rear Shocks


Piston: 8x1.2

Oil: 42.5

Spring: 10.75

Spring Adj: _____

Shock Position:

Pivot Ball Position: ☐ Front ☒ Rear
Damper Stay: ☐ E2503(Aluminum)
☒ E2514(CFRP)

Engine

Type: Orion 3tr Plug: Orion 5
Gasket: _____ Reducer: 6.5mm
Muffler: 2013 Fuel: VP Pro
Engine Mount: ☐ E0701(Standard) ☐ E0703(One Piece)

Diff. Oil

Front: 7000 O-Ring: _____ pcs.
Center: 7000 _____ pcs.
Rear: 3000 _____ pcs.

Tires

Front: Enduro SS Rear: Enduro SS
Compound: _____
Inserts: _____
Wheel: _____


Clutch

Clutch Bell: 13 Spur Gear: 46
Clutch Shoes: _____
Clutch Spring: _____

Body/Wing

Body: Proline
Wing: Stock

Wing Position:



Comments

30th overall