



Track Condition

Size : Open ☐ Mid ☐ Tight ☐

Traction : High ☐ Mid ☐ Low ☐

Condition : Smooth ☐ Bumpy ☐ Dry ☐ Wet ☐

Surface : Carpet ☐ Dirt ☐ Astro turf ☐

Ride Height :


Camber :

Toe :

Anti-roll Bar :

Front Bulkhead Spacer :

<i>Plastic</i>	<i>mm / Brass</i>	<i>mm</i>
<i>Shock Pivot Ball Position :</i>		
<i>Fwd</i> ☐	<i>Back</i> ☐	

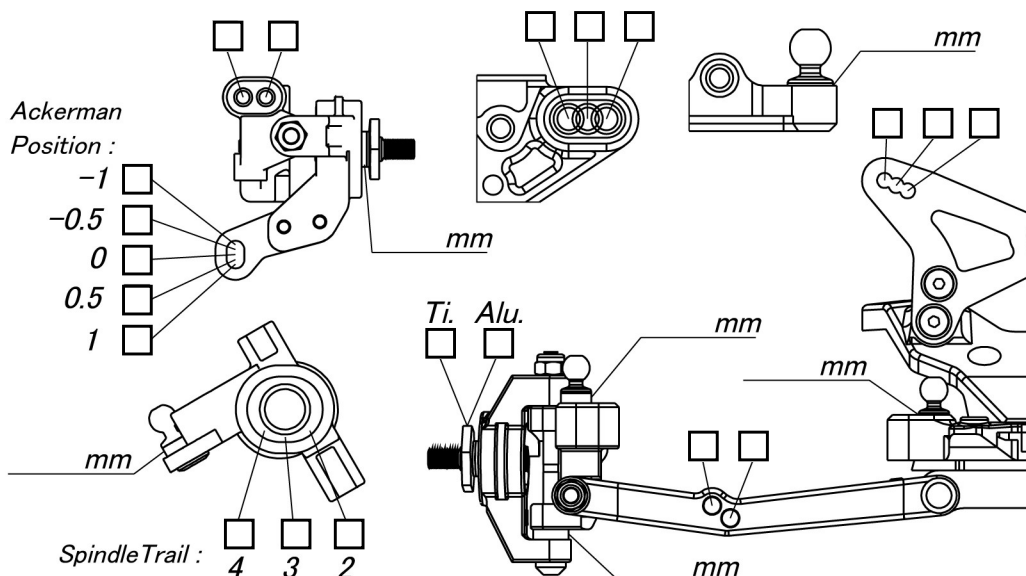

Ride Height : _____


Camber : _____


Anti-roll Bar : _____


Arm Position : Fwd ☐ *Back* ☐

Hub Position : Fwd ☐ *Mid* ☐ *Back* ☐

Shock Pivot Ball Position :
Fwd ☐ *Back* ☐

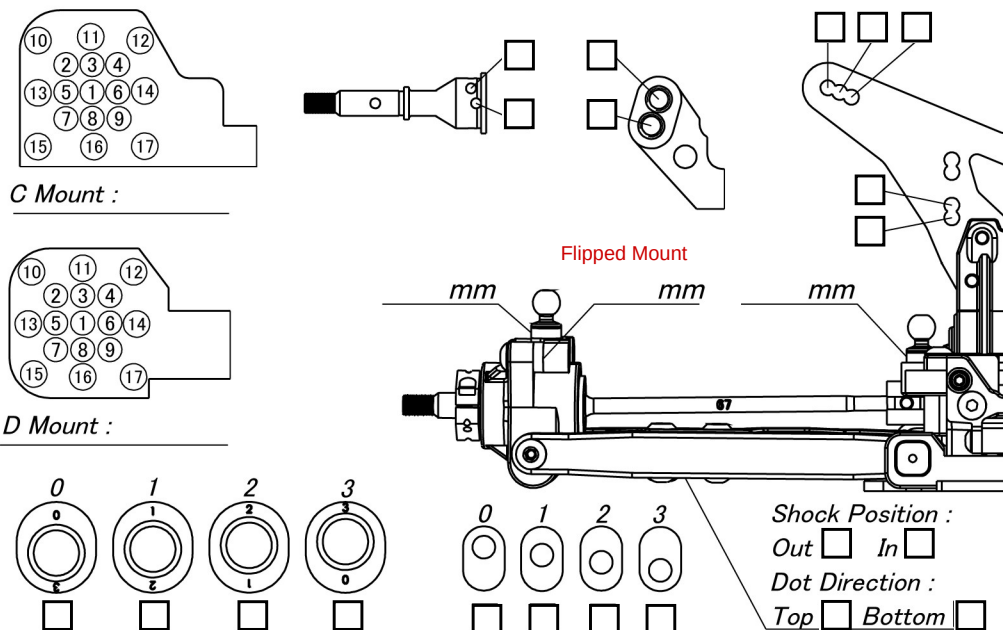

Shocks		Front		Rear		
	Piston :					
	Oil :					
	Spring :					
	Length :					
	Limiters :	Int :	Ext :	Int :	Ext :	
	Eyelet Lenght :	Std ☐	+2 ☐	Std ☐	+2 ☐	
	Cup Offset :	Low ☐	Mid ☐	High ☐	Low ☐	Mid ☐
Electronics		Differential				
Radio :		Gear Diff : ☐ 2 Gear : ☐ Oil				
Servo :		4 Gear : ☐ Friction 0-ring : ☐ 2 Turns in From Flush				
ESC :		Ball Diff : ☐ Setting				
Motor :		Tire	Front	Rear		
Gearing : /		Type :				
Battery : / g		Compound :				
Weight		Inserts :				
Servo Weight : Yes ☐ No ☐		Wheel :				
Battery Weight : 19g ☐ 37g ☐		Additive :				

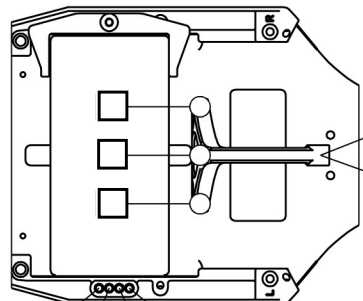

Chassis Brace

Bush Type : ☐ Plastic ☐ Rubber

ESC Plate : ☐ Plastic ☐ Carbon ☐ Brass

Battery Position : ☐ ☐ ☐ ☐

Total Weight : _____ g	
Body & Wing	
Body :	
Wing :	
Wing Angle : 0° ☐ 3° ☐ 6° ☐	
Front Wing : _____ Low : ☐ High : ☐	