




Na _____

Composition _____



Toe _____
Camber _____
Caster 0° 3° 4° 5° _____
Ride height _____


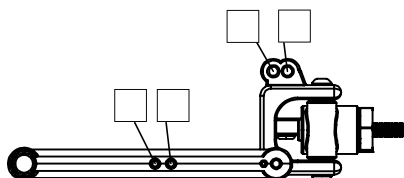


☐ +3°
☐ +0°



☐ +5mm

☐ +5mm, 7°, 66gr

Ackermann




Bumpsteer shim



Front Rear

☐ 1.5mm
☐ 1.6mm



Tire _____

Wheel _____

Inserts _____



Oil _____

Spring _____

Piston _____

Limiter - In /Out _____

Preload _____

Notes _____


Camber _____
Ride height _____



Anti-Squat






Toe-in



Hex

☐ 3.2mm
☐ 4mm



Oil _____



Spring _____

Piston _____

Limiter - In /Out _____

Preload _____

Notes _____



Tire _____

Wheel _____

Inserts _____

Other

Configuration ☐ Rear Motor ☐ Midship ☐ 3 Idler ☐ 4 Idler

Motor _____ Body _____ Wing _____

ESC _____ Setting _____