


Track Conditions



Name :	Composition _____		
Date :	Traction: ☐ High	☐ Med.	☐ Low
Track :	Surface: ☐ Smooth	☐ Med.	☐ Bumpy

Front Suspension



Toe _____
 Camber _____
 Caster 0° 3° 4° 5° _____
 Ride height _____

Bumpsteer shim _____



Oil _____


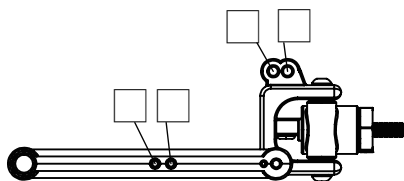
Spring _____

Piston _____


Limiter - In _____ /Out _____

Preload _____





Notes _____



Front _____ Rear _____

☐ +3°☐ +0°☐ +5mm☐ +5mm, 7°, 66gr

Ackermann


☐ 1.5mm☐ 1.6mm

Tire _____

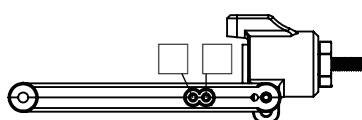
Wheel _____

Inserts _____


Rear Suspension




Camber _____
 Ride height _____



Shim _____



Hex

☐ 3.2mm☐ 4mm

Oil _____

Spring _____

Piston _____




Limiter - In _____ /Out _____

Preload _____



Notes _____

Anti-Squat ☐ 0☐ 1☐ 2

Toe-in

☐ 2.5°☐ 3°☐ _____

Front _____ Rear _____

☐ Gear differentialBall differential ☐

Diff Oil # _____

Tire _____

Wheel _____

Inserts _____

Other

Configuration ☐ Rear Motor ☐ Midship ☐ 3 Idler ☐ 4 Idler

Motor _____ Body _____ Wing _____

ESC _____ Setting _____