





FRONT SUSPENSION

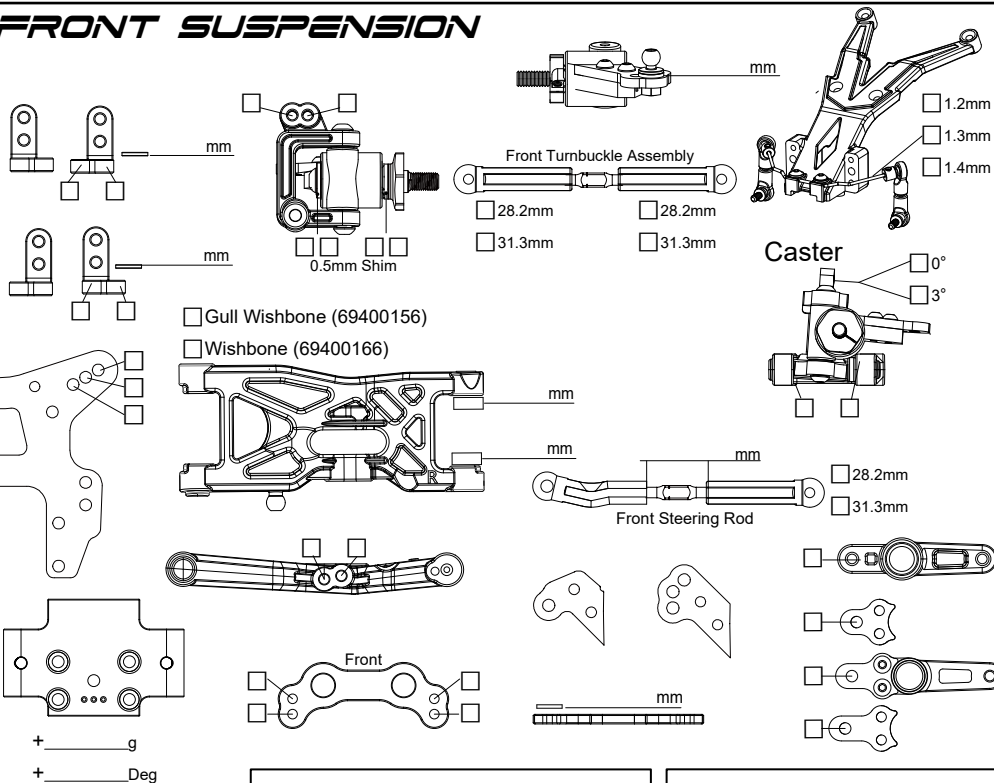

Shock Body	☐ 12.0mm
	☐ 12.8mm
	☐ 0.36mm Shim
Oil	
Piston	
Spring	
Downstop	
Upstop	
Length	
O-Ring	

Camber	
Ride Height	
Toe	


REAR SUSPENSION

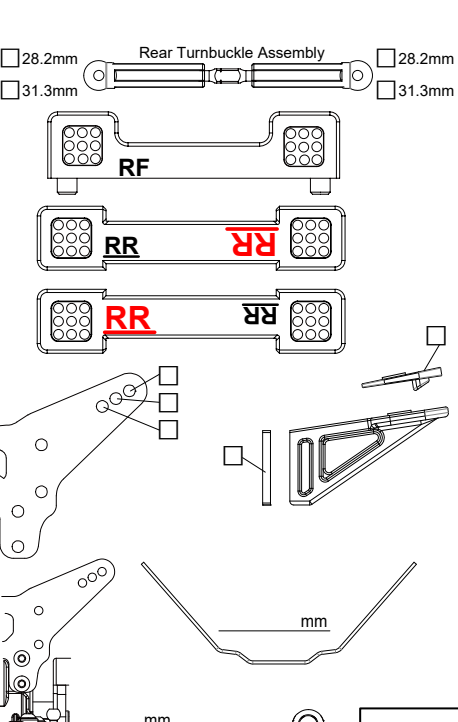

Shock Body	☐ 12.0mm
	☐ 12.8mm
	☐ 0.36mm Shim
Oil	
Piston	
Spring	
Downstop	
Upstop	
Length	
O-Ring	

Camber	
Ride Height	
Toe	

DIFFERENTIAL

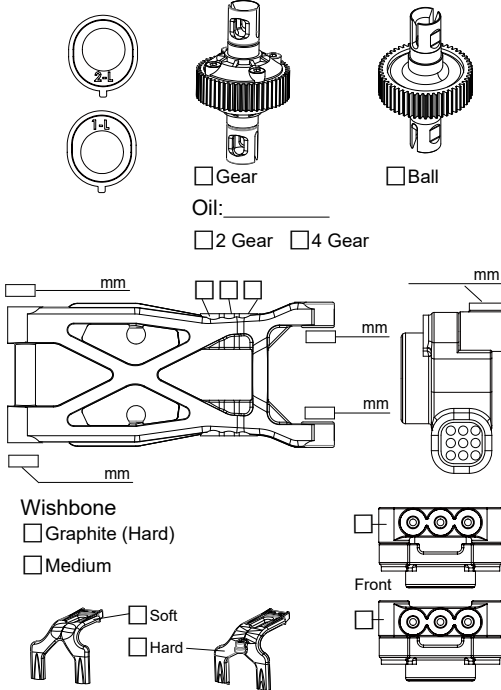


Camber	
Ride Height	
Toe	

FRONT	Motor
Tire	Pinion
Insert	Spur
Wheel	ESC
REAR	Servo
Tire	Profile: ☐ Std. ☐ Low
Insert	Battery
Wheel	Size: ☐ Std. ☐ Low

TRACK CONDITIONS				
Layout	☐ Open	☐ Mixed	☐ Tight	
Traction	☐ Low	☐ Medium	☐ High	
Surface	☐ Bumpy	☐ Smooth		
Composition	☐ Astroturf	☐ Carpet	☐ Clay	
	☐ Dirt	☐ Grass		
Condition	☐ Blue Groove	☐ Hard Packed	☐ Loamy	
	☐ Dusty	☐ Dry	☐ Wet	

AERODYNAMICS	
Body	
Wing	
Front Wing	
WEIGHT	
Under Servo	
Under ESC	
Under Battery	

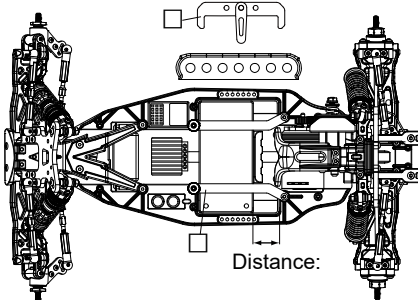WEIGHT DISTRIBUTION	
	
Distance:	