







Front Suspension




Toe _____
Camber _____
Caster 0° 4° _____
Ride Height _____


Wheelbase
Front _____ Rear _____

Oil _____
Spring _____
Piston _____
Limiter - In _____ /Out _____
Preload _____
Notes _____

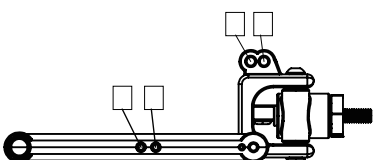


☐ +3°
☐ +0°



☐ +5mm

☐ Brass +66g
+7 degree pickup





☐ 1.1mm
☐ 1.0mm
☐ _____





☐ 1.5mm
☐ 1.6mm

Rear Suspension



Camber _____


Wheelbase
Front _____ Rear _____

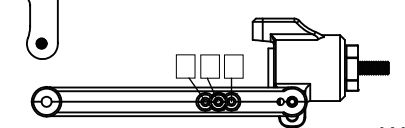
Oil _____
Spring _____
Piston _____
Limiter - In _____ /Out _____
Preload _____
Notes _____




☐ 0
☐ 1
☐ 2



☐ 3°
☐ 4°


☐ Brass 21g Rear Toe
Black 3.5 degree

Configuration
☐ Rear Motor
☐ Midship



Ball differential ☐

Diff Oil # _____
☐ Gear differential



☐ 1.1mm
☐ 1.0mm
☐ _____

Front


Rear


Tire _____
Wheel _____
Insert _____

Tire _____
Wheel _____
Insert _____

Track Conditions

Size: ☐ Open ☐ Medium ☐ Tight
Traction: ☐ High ☐ Medium ☐ Low
Surface: ☐ Smooth ☐ Medium ☐ Bumpy
Composition: ☐ Astroturf ☐ Clay ☐ Dirt ☐ Grass
☐ Carpet ☐ Wood ☐ Other: _____

Others

ESC _____
Setting _____
Battery _____
Motor _____
Spur/Pinion _____
Body _____

Arn0