



FRONT

Ride Height:	
Camber:	
Toe:	
Arm Stiffness:	Standard ☐ Medium ☐ Stiff ☐
Anti Roll Bar Thickness:	
Arm Mount Angle:	-2.5° ☐ 0° ☐ +2.5° ☐
C-Hub Arm Spacing - Fr:	mm - Rr mm
Axle Trail:	T3 ☐ T4 ☐
C-Hub Caster Pill:	Plus ☐ Minus ☐
	0 ☐ 2 ☐ 2.5 ☐ 5 ☐
Steering Arms:	Aluminium ☐ Plastic ☐

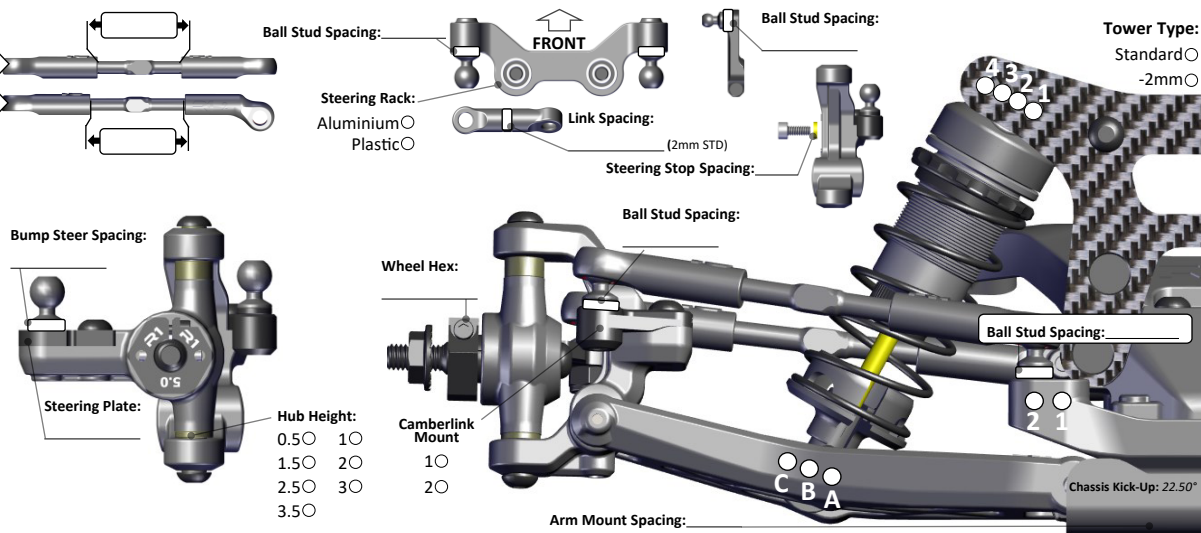

REAR

Ride Height:	
Camber:	
Arm Stiffness:	Standard ☐ Medium ☐ Stiff ☐
Anti Roll Bar Thickness:	
Arm Spacing:	Forward ☐ Middle ☐ Back ☐
Hub Spacing - Fr:	mm - Rr mm
Hub Type:	Std ☐ HRC ☐ Alum. ☐ Plastic ☐
Tower Type:	Standard ☐ -2mm ☐
Differential:	Ball ☐ Gear ☐
Gear Diff Planet Gear Qty:	2Gear ☐ 4Gear ☐
Differential Height:	Low ☐ High ☐

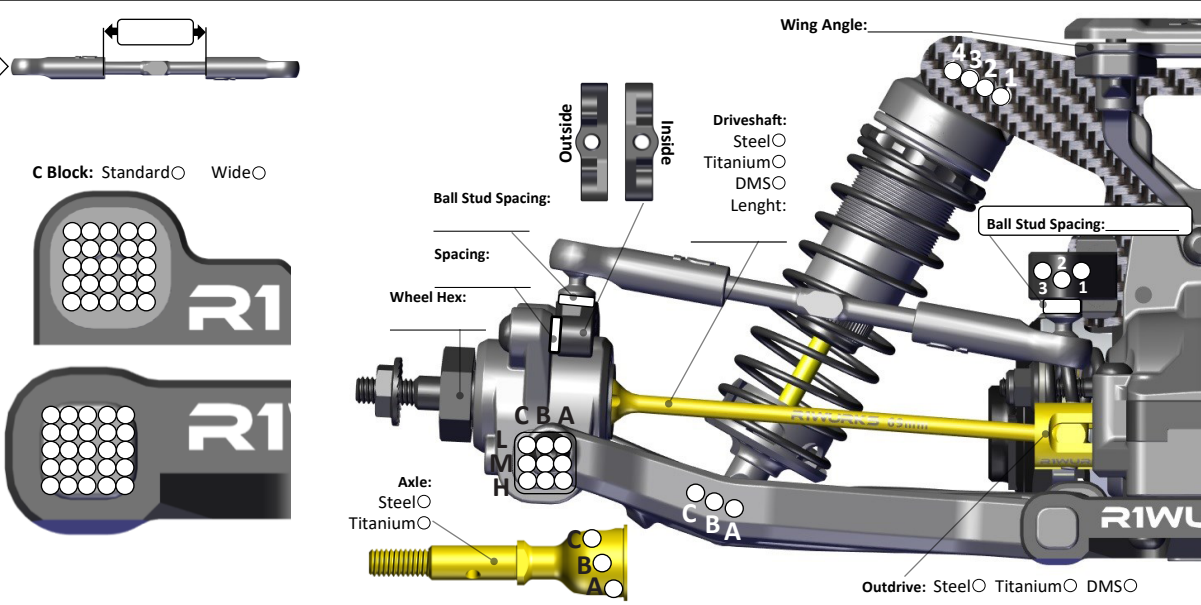

ELECTRONICS

Servo:	
ESC:	
Motor:	
Timing:	
Pinion:	Spur:
Battery:	Wt: g
Battery Position:	Inline ☐ Transverse ☐
Inline Battery Position:	Fwd ☐ Back ☐
Front [Transverse Battery Position] Rear	
Front [Inline Battery Position] Rear	
Fan:	Alum. ☐ Plastic ☐ Side ☐ Cent. ☐

CHASSIS STIFFNESS


Rear Brace:	Yes ☐ No ☐	Material:	Aluminium ☐ Carbon ☐
Waterfall:	Yes ☐ No ☐	Stiffness:	Standard ☐ Medium ☐ Stiff ☐
Waterfall Pivot:		Pivot ☐	Solid ☐
Side Rail Stiffness:		Standard ☐ Medium ☐ Stiff ☐	
Gearbox Stiffness:		Standard ☐ Medium ☐ Stiff ☐	
Front Upper Chassis Brace Stiffness:		Standard ☐ Medium ☐ Stiff ☐	
ESC Tray:	Steel ☐ Brass ☐ CFO ☐	Servo Tray:	Steel ☐ Brass ☐ CFO ☐

GEAR TRAIN

Top Shaft:	Slipper ☐ Lock-out ☐
Pad Material:	

SHOCKS

	FRONT	REAR
Piston		
Thickness		
Oil Brand		
Oil		
Spring		
Limiters:	In: Out:	In: Out:
Stoke		
Eyelet		
Spring Cup		



TRACK

Name:	
Composition:	
Size:	
Traction:	
Surface:	
Weather:	

TIRES & WHEELS

Front- Tyre:	Rr:
Rear - Tyre:	Rr:
Compound - Fr:	Rr:
Foam - Fr:	Rr:
Tire Sauce:	
Front Sidewall Glue:	Inside ☐ Outside ☐

BODY, WING & WEIGHT

Body:	
Rear Wing:	
Body Weight:	
Total Weight:	
Front-Rear Weight Bias - Fr	% - Rr: %

NOTES