

Driver: Matt Tunks

Date:

Event/Track: MKGP

Qualify: 2

Final: 2-2-2

Best Lap:

TRACK TYPE

Grip Level High Medium Low

Type Tight Open Mixed

Condition Flat Bumpy Mixed

Surface Clay Long Astro Carpet
 Grass Short Astro Mixed

Weather outdoor indoor

TYRES

	FRONT	REAR
Tyres	HC	HC
Wheels	U1516	U1458
Inserts	Tubby	Tubby

Notes:
sidewalls glued to the line

Notes:
ballraced steering
servo lockout

FRONT SUSPENSION

KEY: P = Plastic, A = Alloy, CF = Carbon Fibre, S2 = Schumacher Composite, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = No

Ride Height mm

Toe deg In Out


Camber at Ride Height deg

Rake (C/F) 10° 15° 20°

Castor +5 0 -5

Bump Steer Washers mm

Servo Saver Lockout Y N

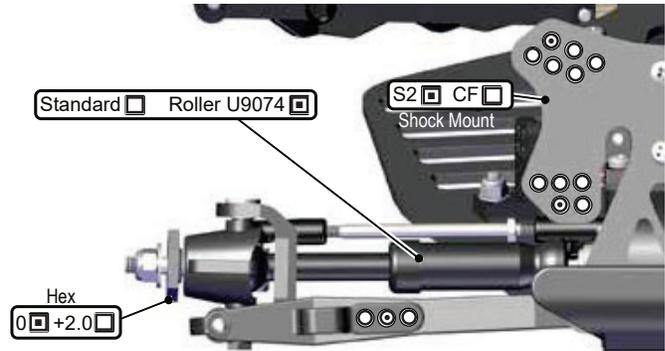

REAR SUSPENSION


KEY: P = Plastic, A = Alloy, CF = Carbon Fibre, S2 = Schumacher Composite, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = No

Ride Height mm

Camber at Ride Height deg

ARB 1.2 1.4 1.6

Anti Squat 0° 3° (Alloy U9133)

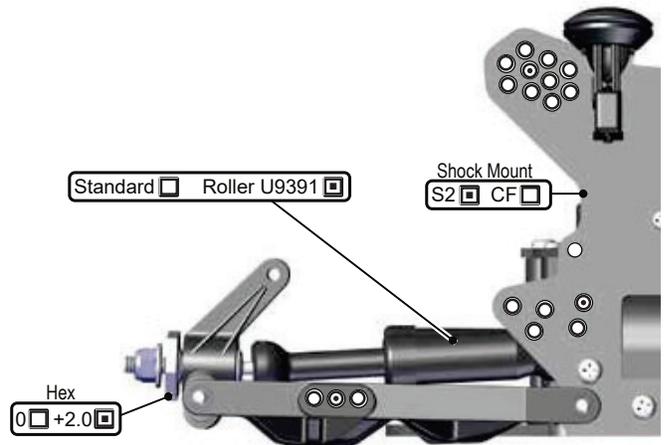

LH RH	Height	Actual	
2° 2	Low	5°	<input type="checkbox"/>
1° 1	Low	4°	<input type="checkbox"/>
0° 0	Low	3°	<input type="checkbox"/>
0 0°	Low	3°	<input type="checkbox"/>
1 1°	Low	2°	<input type="checkbox"/>
2 2°	Low	1°	<input type="checkbox"/>
2 2°	High	5°	<input type="checkbox"/>
1 1°	High	4°	<input type="checkbox"/>
0 0°	High	3°	<input type="checkbox"/>
0° 0	High	3°	<input type="checkbox"/>
1° 1	High	2°	<input type="checkbox"/>
2° 2	High	1°	<input type="checkbox"/>

Rear Toe-in Insert

EQUIPMENT

E.S.C. HW XR10 PRO

Servo AEROX MP1

RX Sanwa

LiPo intellect 4800

Motor 10.5 42deg

Timing 10.5 42deg

Pinion 21 T

Spur 92 T

Pro Slipper Y N

CHASSIS

LiPo Position 1 2 3

Wing Mount U3850

Alloy Bulkheads U9111 U9139 U9162

Running Weight 1500 g

Chassis S2 C/F

WEIGHTS

Notes:
no undertray

SHOCKS

KEY: i = Internal, e = External, V = Vented, S = Sealed, A = Aeration

	FRONT	REAR
Cap	<input type="checkbox"/> V <input type="checkbox"/> S <input type="checkbox"/> A	<input type="checkbox"/> V <input type="checkbox"/> S <input type="checkbox"/> A
Oil	500 cSt	400 cSt
Valves		
Spring	yellow 4.6 lb/in	orange 2.8 lb/in
Limiters (i)	<input type="text"/> mm	<input type="text"/> mm
Stroke	<input type="text"/> mm	<input type="text"/> mm
Limiters (e)	<input type="text"/> mm	<input type="text"/> mm
Sockets	<input type="checkbox"/> Short <input type="checkbox"/> Long	<input type="checkbox"/> Short <input type="checkbox"/> Long

big bore shocks, kashima coated, VRP 2x1.7 front, VRP 2x1.9 rear, black washers long ball cups