

Driver and Event	
Name	Lloyd Storey
Date	Jan 2013
Event	Worksop Rd3
Weather	Indoor
Result	

Track Conditions	
Surface	Rubber/Cork floor
Grip Level	Medium
Track Condition	



Electrics and Gearing	
E.S.C	SP GT2
Servo	Spektrum S6040
Receiver	Spektrum
Batteries	Core 4000 20C
Motor	SP 5.5
Spur Gear	98T <input type="checkbox"/> 95T <input checked="" type="checkbox"/>
Pinion	19
LH Cell Position	Forward <input type="checkbox"/> Backward <input checked="" type="checkbox"/>

Wheels and Tyres	
Rear Wheels	Schumacher
Rear Tyre	Schum Yellow minipin
Rear Insert	Answer RC Blue
Front Wheels	Schumacher
Front Tyre	Schum Yellow minipin
Front Insert	Answer RC Blue

Additional Settings	
Car Weight	
Weights Added	None
Chassis	Alloy <input checked="" type="checkbox"/> Option <input type="checkbox"/>

NOTES
Small bore shocks with small bore springs
3/4 length cut down ball grippas, and wound in all the way.

Diff Type	
Diff Oil	
Front	Ball <input checked="" type="checkbox"/> Gear <input type="checkbox"/>
Rear	Ball <input checked="" type="checkbox"/> Gear <input type="checkbox"/>

Rear Shocks	
Oil	500
Spring	Red
Piston	Red tapered
Drilled	<input type="checkbox"/>
Hole Size	mm
Shock Cap	Sealed <input type="checkbox"/>
Vented	<input type="checkbox"/>
Emulsion	<input checked="" type="checkbox"/>
Shock Length	mm



Front Shocks	
Oil	550
Spring	Blue
Piston	Black tapered
Drilled	<input type="checkbox"/>
Hole Size	mm
Shock Cap	Sealed <input type="checkbox"/>
Vented	<input type="checkbox"/>
Emulsion	<input checked="" type="checkbox"/>
Shock Length	mm

Rear Suspension	
Anti roll bar	No <input checked="" type="checkbox"/> 1.00 <input type="checkbox"/> 1.20 <input type="checkbox"/> 1.40 <input type="checkbox"/> 1.60 <input type="checkbox"/>
Wheelbase	Short <input type="checkbox"/> Med <input checked="" type="checkbox"/> Long <input type="checkbox"/>

Camber at Ride Height	-1 Deg
Ride Height	19 mm

Anti-squat Washers	
0.00 Difference = 0.00° Toe-in	<input type="checkbox"/>
0.50 Difference = 0.60° Toe-in	<input type="checkbox"/>
1.00 Difference = 1.30° Toe-in	<input checked="" type="checkbox"/>
1.50 Difference = 1.95° Toe-in	<input type="checkbox"/>
2.00 Difference = 2.60° Toe-in	<input type="checkbox"/>
2.50 Difference = 3.25° Toe-in	<input type="checkbox"/>
3.00 Difference = 3.90° Toe-in	<input type="checkbox"/>

Rear Toe-in & Track Washers	
0.00 Difference = 0.00° Toe-in	<input type="checkbox"/>
0.50 Difference = 0.60° Toe-in	<input type="checkbox"/>
1.00 Difference = 1.30° Toe-in	<input type="checkbox"/>
1.50 Difference = 1.95° Toe-in	<input type="checkbox"/>
2.00 Difference = 2.60° Toe-in	<input checked="" type="checkbox"/>
2.50 Difference = 3.25° Toe-in	<input type="checkbox"/>
3.00 Difference = 3.90° Toe-in	<input type="checkbox"/>
Rear 2 mm Front 0 mm	

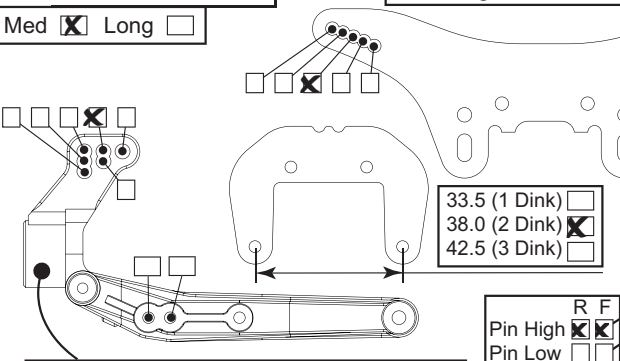

Blocks	Moulded <input type="checkbox"/> Alloy <input checked="" type="checkbox"/>
--------	--

Rear Hub Carrier	Alloy <input type="checkbox"/> Std <input checked="" type="checkbox"/>
Alloy Hub Carrier	+1° <input type="checkbox"/> -1° <input type="checkbox"/>

Front Suspension	
Anti roll bar	No <input checked="" type="checkbox"/> 1.00 <input type="checkbox"/> 1.20 <input type="checkbox"/> 1.40 <input type="checkbox"/> 1.60 <input type="checkbox"/>

Camber at Ride Height	-1 Deg
Ride Height	18 mm

Toe-In	zero Deg
Washers	0 mm

Track Washers	2 mm
Blocks	Moulded <input type="checkbox"/> Alloy <input checked="" type="checkbox"/>

