



Driver: Ben Smith

Date: 25.01.26

Event/Track: EOS Daun

Qualify: P5

Final: P6

Best Lap:

TRACK TYPE

Grip Level ☒ High ☐ Medium ☐ Low ☐Type ☐ Tight ☐ Open ☐ Mixed ☐Condition ☐ Flat ☐ Bumpy ☐ Mixed ☐Surface ☐ Clay ☐ Long Astro ☐ Carpet ☐☐ Grass ☐ Short Astro ☐ Mixed ☐Weather

TYRES

FRONT

REAR

Tyres U6911 U6839Wheels Inserts

Notes:

Inner & Outer Rows Cut Off Cactus
Glued Sidewalls Roughly 2/3 Up The Stagger


Notes:

Carbon Sidepods - U9335
Carbon Top Decks - U9279 & U9280
One Piece Servo Mount - U9292
HRC Rear Straps - U9289 & U9212
High Performance Slipper Pads - U8862
Alloy Rear Body Mount - U9323


FRONT SUSPENSION

KEY: P = Plastic, A = Alloy, B = Brass, CF = Carbon Fibre, S2 = Schumacher Composite,
M = Medium, S = Stiff, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = NoRide Height 12 mmToe 0 deg In ☐ Out ☐Camber at Ride Height -1 degARB ☐ N/A ☐ 1.0 ☐ 1.1 ☐ 1.2 ☐ 1.4 ☐ 1.6 ☐ 1.8 ☐ 1.9 ☐ 2.0 ☐ 2.1 ☐Driveshaft Type ☐ CVD ☐ Roche ☐ U/J ☐Steering Arm ☐ Kit ☐ 1 Dot ☐ 2 Dot ☐ 3 Dot ☐


'B' Mount

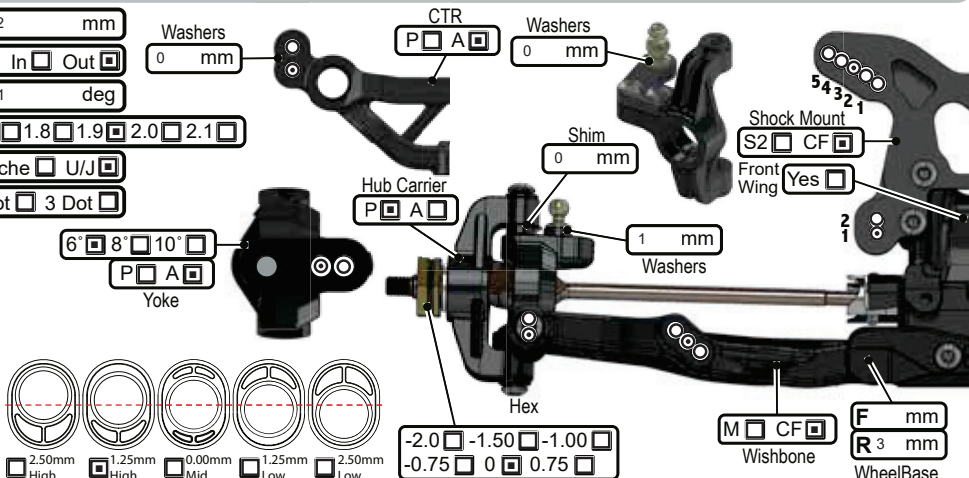

REAR SUSPENSION

KEY: P = Plastic, A = Alloy, B = Brass, CF = Carbon Fibre, S2 = Schumacher Composite,
M = Medium, S = Stiff, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = NoRide Height 12 mmCamber at Ride Height -1 degARB ☐ N/A ☐ 1.0 ☐ 1.1 ☐ 1.2 ☐ 1.4 ☐ 1.6 ☐ 1.8 ☐ 1.9 ☐ 2.0 ☐ 2.1 ☐Wing Gurney Height 0 mmDriveshaft Type ☐ CVD ☐ U/J ☐High Roll Centre Straps ☐ Y ☐ N ☐

'D' Mount

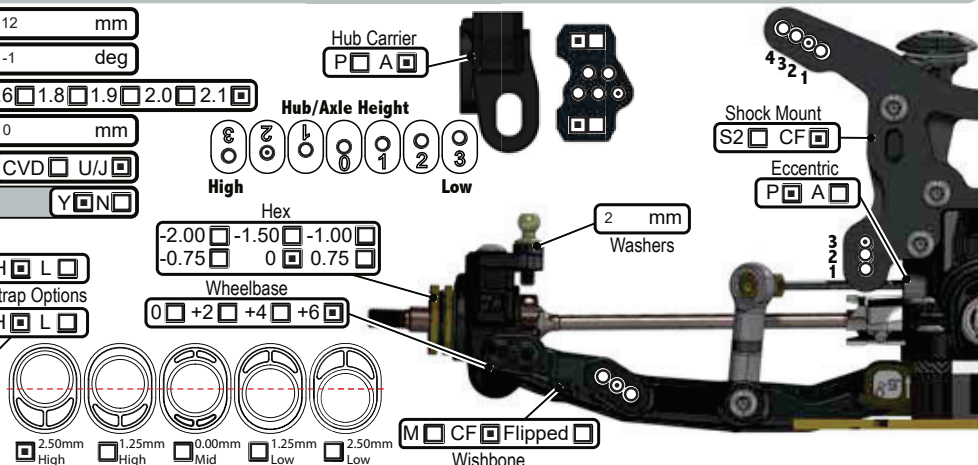

TRANSMISSION

Lock Out ☐ Y ☐ N ☐Slipper Plates 2 ☐ 3 ☐

Differential Oil

Front (cSt) 30 ☐ k ☐ Centre (cSt) 20 ☐ k ☐ Rear (cSt) Gears 2 ☐ 4 ☐ Gears 2 ☐ 4 ☐ Gears 2 ☐ 4 ☐

Centre Transmission

F.A.B ☐ Y ☐ N ☐ Lock Out ☐ Y ☐ N ☐ Gear Diff ☐ Y ☐ N ☐

Notes:

EQUIPMENT

E.S.C. ☐ ELCERAM Nitride G2Servo ☐ Aeromax MP1RX ☐ Sanwa RX-492iLiPo ☐ Cayote 4600Bodyshell ☐ JC F2Wing ☐ AX037Motor ☐ HW 5.0tTiming 30 degPinion 20 TSpur 83 T

CHASSIS

LiPo Position 1 ☐ 2 ☐ 3 ☐Running Weight 9Front Deck ☐ Y ☐ N ☐Rear Deck ☐ Y ☐ N ☐Chassis Length ☐ S ☐ L ☐

WEIGHTS

Notes:

SHOCKS

KEY: i = Internal, e = External,
V = Vented, S = Sealed, A = Aeration

FRONT REAR

Cap ☐ V ☐ S ☐ A ☐ ☐ V ☐ S ☐ A ☐Kashima ☐ Y ☐ N ☐ ☐ Y ☐ N ☐Oil 600 cSt 500 cStPiston 2 x 1.6 Tapered 2 x 1.8 TaperedSpring Agile Black lb/in Agile Black lb/inLimiters (i) mm mmStroke 21.0 mm 28.5 mmLimiters (e) mm mmStand Off mm 3 mm