



Driver: Michal Orłowski

Date: November 2025

Event/Track: FCC 2025

Qualify:

Final:

Best Lap:

TRACK TYPE

Grip Level ☐ High ☐ Medium ☐ Low ☐Type ☐ Tight ☐ Open ☐ Mixed ☐Condition ☐ Flat ☐ Bumpy ☐ Mixed ☐Surface ☐ Clay ☐ Long Astro ☐ Carpet ☐☐ Grass ☐ Short Astro ☐ Mixed ☐Weather

TYRES

FRONT

REAR

Tyres Hotrace HotraceWheels Schumacher SchumacherInserts Hotrace Hotrace

Notes:

Notes:

JConcepts 2970, 0503, 5163, 0535

U9290

U8914

U8915

U9292

U9304

U9334

U9293

U9294

U9335

U9339

9.5mm FAB


U9212, U9289

FRONT SUSPENSION


KEY: P = Plastic, A = Alloy, B = Brass, CF = Carbon Fibre, S2 = Schumacher Composite, M = Medium, S = Stiff, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = No

Ride Height 12 mmToe 2 deg In ☐ Out ☐Camber at Ride Height -1 degARB ☐ N/A ☐ 1.0 ☐ 1.1 ☐ 1.2 ☐ 1.4 ☐ 1.6 ☐ 1.8 ☐ 1.9 ☐ 2.0 ☐ 2.1 ☐Driveshaft Type ☐ CVD ☐ Roche ☐ U/J ☐Steering Arm ☐ Kit ☐ 1 Dot ☐ 2 Dot ☐ 3 Dot ☐

'A' Mount

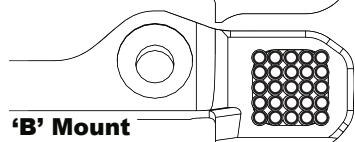

'B' Mount

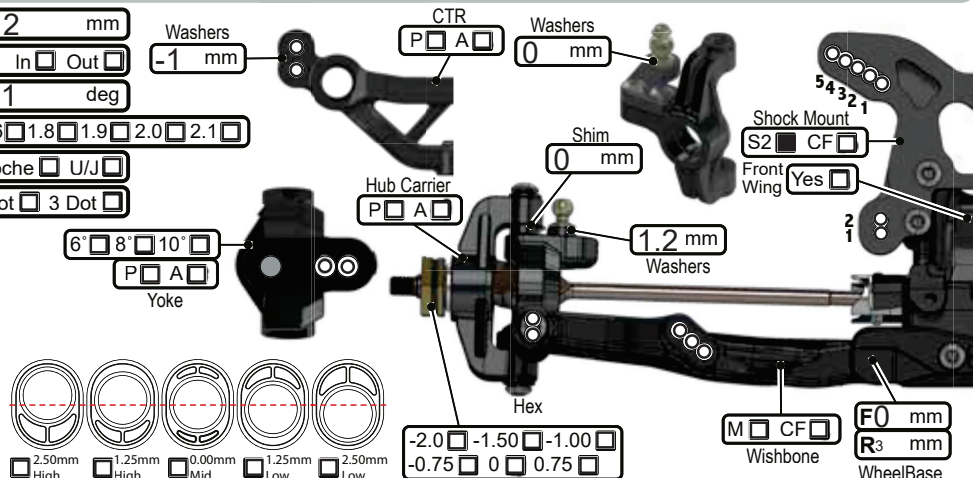


REAR SUSPENSION


KEY: P = Plastic, A = Alloy, B = Brass, CF = Carbon Fibre, S2 = Schumacher Composite, M = Medium, S = Stiff, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = No

Ride Height 12 mmCamber at Ride Height -1 degARB ☐ N/A ☐ 1.0 ☐ 1.1 ☐ 1.2 ☐ 1.4 ☐ 1.6 ☐ 1.8 ☐ 1.9 ☐ 2.0 ☐ 2.1 ☐Wing Gurney Height mmDriveshaft Type ☐ CVD ☐ U/J ☐High Roll Centre Straps ☐ Y ☐ N ☐

'C' Mount



'D' Mount

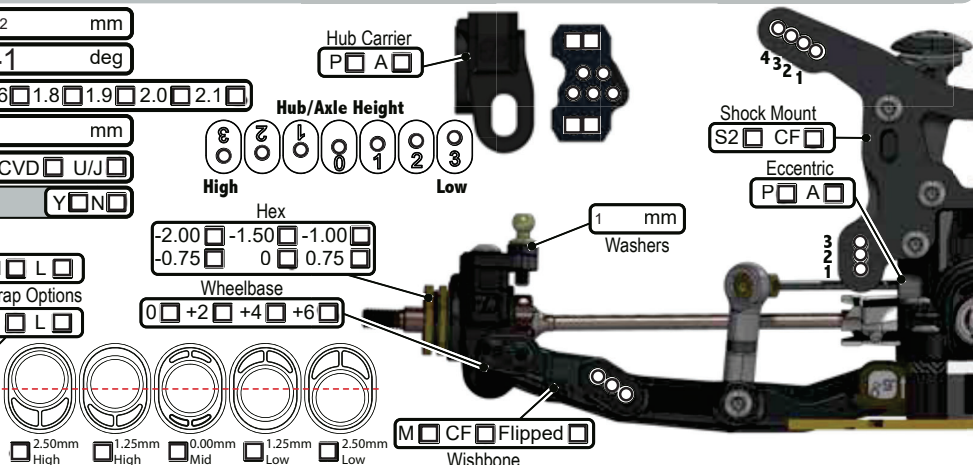

TRANSMISSION

Lock Out ☐ Y ☐ N ☐Slipper Plates 2 ☐ 3 ☐

Differential Oil

Front (cSt) 40 k Centre (cSt) k Rear (cSt) 25 k Gears ☐ 2 ☐ 4 ☐ Gears ☐ 2 ☐ 4 ☐ Gears ☐ 2 ☐ 4 ☐

Centre Transmission

F.A.B ☐ Y ☐ N ☐ Lock Out ☐ Y ☐ N ☐ Gear Diff ☐ Y ☐ N ☐

Notes:

EQUIPMENT

E.S.C. ☐ ELC NITRIDE G2Servo ☐ POWERHD GTS-3RX ☐ SANWA RX-493iLiPo ☐ Team Cayote 4600Bodyshell ☐ JC F2Wing ☐ JC 0503Motor ☐ Cayote 4.5Timing 30 degPinion 18 TSpur 80 T

CHASSIS

LiPo Position ☐ 1 ☐ 2 ☐ 3 ☐Running Weight 159 gFront Deck ☐ Y ☐ N ☐Rear Deck ☐ Y ☐ N ☐Chassis Length ☐ S ☐ L ☐

WEIGHTS

Notes:

SHOCKS

KEY: i = Internal, e = External, V = Vented, S = Sealed, A = Aeration

FRONT REAR

Cap ☐ V ☐ S ☐ A ☐ ☐ V ☐ S ☐ A ☐Kashima ☐ Y ☐ N ☐ ☐ Y ☐ N ☐Oil 650 cSt 450 cStPiston 2x1.6 2x1.8Spring Black AX lb/in Black AX lb/inLimiters (i) 1 mm mmStroke 21 mm 28.5 mmLimiters (e) mm 2 mmStand Off mm 4 mm