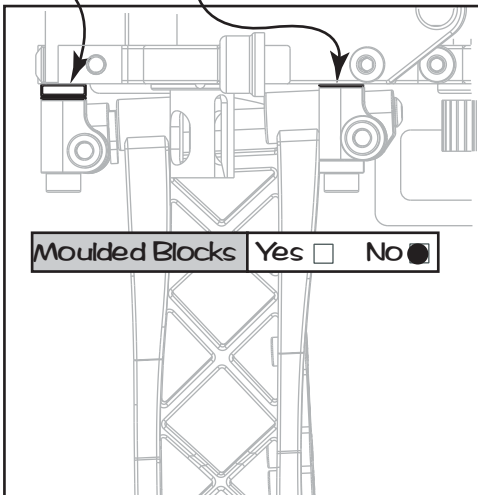


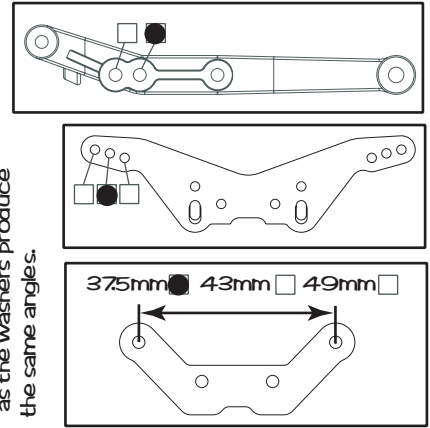
Driver and Event	
Name	Simon Moss
Date	2010
Event	Testing
Weather	Sunny
Result	Testing
Track Conditions	
Grip Level	Low
Surface	Clay
Track Condition	Dry Clay
Temperature	
Electrics	
E.S.C	Speed Passion GT2.0
Servo	Sanwa ERG
Receiver	Sanwa
Li-Po	Speed Power 5300 40C
Motor	Speed Passion 6.5
Spur	83T
Pinion	22T
Internal Ratio	2.6

Wheels - Tyres - Inserts	
Front Wheels	Sch Revlite
Front Inserts	Proline Standard
Front Tyres	Proline Holeshot
Rear Wheels	Sch Revlite
Rear Inserts	Proline Standard
Rear Tyres	Proline Holeshot
Transmission	
Rear Diff Height	Low
Front Diff Height	Low
Front Layshaft Pulley	
One Way <input type="checkbox"/> Fixed <input type="checkbox"/> F.A.B <input checked="" type="checkbox"/>	
Front Drive	Diff
Front Overdrive	No
Chassis	
Carbon Fibre <input type="checkbox"/> SI <input checked="" type="checkbox"/>	

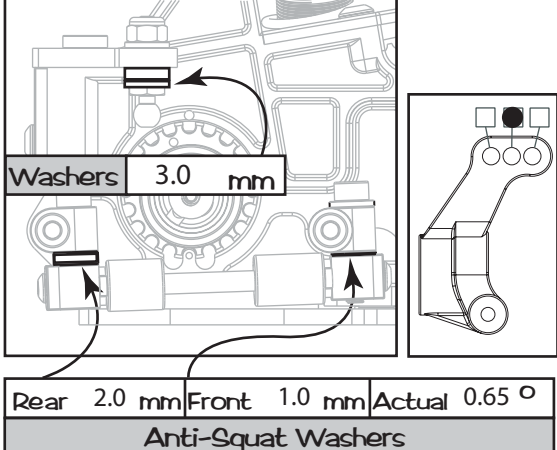
Notes

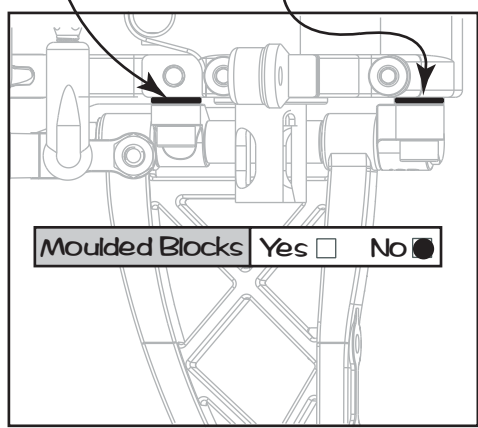
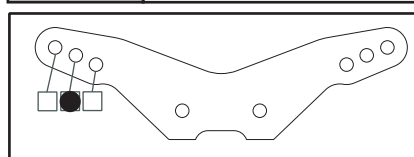
Long Ball Socket on shock bottoms cut down by 2.00mm

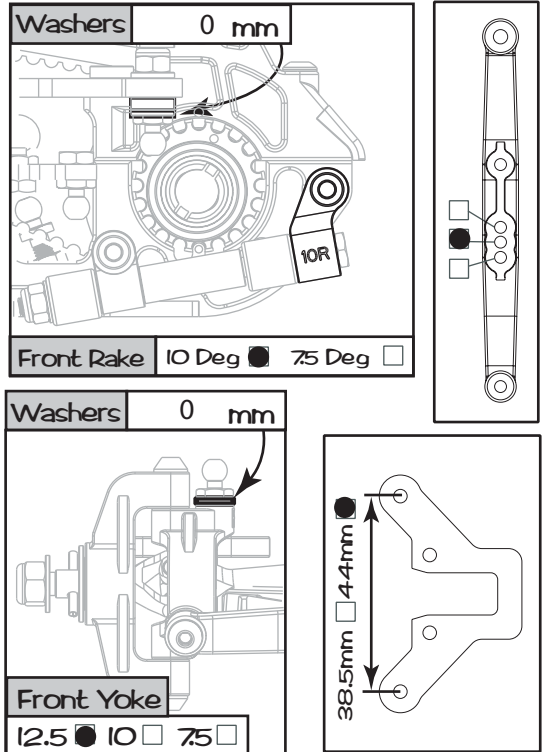
Rear Suspension	
Wheelbase	Short <input checked="" type="checkbox"/> Medium <input type="checkbox"/> Long <input type="checkbox"/>
Roll Bar	No <input checked="" type="checkbox"/> 1.2 <input type="checkbox"/> 1.4 <input type="checkbox"/> 1.6 <input type="checkbox"/>
<p>Equal Washers = 0° Toe-in          0.50 Difference = 0.65° Toe-in          1.00 Difference = 1.30° Toe-in          1.50 Difference = 1.95° Toe-in          2.00 Difference = 2.60° Toe-in          2.50 Difference = 3.25° Toe-in          3.00 Difference = 3.90° Toe-in</p>	
Toe-in / Rear Track Washers	
Rear	3.0 mm
Front	0 mm
Actual	3.9°
	
Moulded Blocks Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	

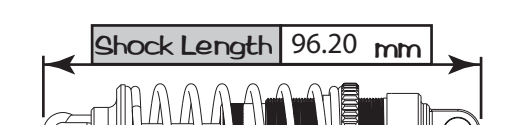


Note: The Anti-Squat Angle is worked out using the Toe-In Chart as the washers produce the same angles.

Washers	3.0 mm
Rear	2.0 mm
Front	1.0 mm
Actual	0.65°
Anti-Squat Washers	
	

Front Suspension	
Front Track Washers	
Rear	1 mm
Front	1 mm
	
Moulded Blocks Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
Roll Bar	No <input checked="" type="checkbox"/> 1.2 <input type="checkbox"/> 1.4 <input type="checkbox"/> 1.6 <input type="checkbox"/>
	

Washers	0 mm
Front Rake	10 Deg <input checked="" type="checkbox"/> 75 Deg <input type="checkbox"/>
Washers	0 mm
Front Yoke	12.5 <input checked="" type="checkbox"/> 10 <input type="checkbox"/> 7.5 <input type="checkbox"/>
	

Rear Shocks	
Oil	25w
Springs	2.0Lb/in
Piston Holes	2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input checked="" type="checkbox"/>
Diaphragm Spec	Full
Shock Length	96.20 mm
	

Front Shocks	
Oil	30w
Springs	4.0Lb/in
Piston Holes	2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input checked="" type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/>
Diaphragm Spec	Full
Shock Length	85.50 mm
