

Driver: Elias Johansson

Date: 2025

Event/Track: Galaxen

Qualify:

Final:

Best Lap:

TRACK TYPE

Grip Level ☐ High ☒ Medium ☐ Low ☐

Type ☐ Tight ☐ Open ☐ Mixed ☐

Condition ☐ Flat ☐ Bumpy ☐ Mixed ☐

Surface ☐ Clay ☐ Long Astro ☐ Carpet ☐
☐ Grass ☐ Short Astro ☐ Mixed ☐

Weather

TYRES

	FRONT	REAR
Tyres	Contact / Hottrace	Contact / Hottrace
Wheels		
Inserts		

Notes:

start
73 front
77 rear

Notes:

FRONT SUSPENSION

KEY: P = Plastic, A = Alloy, B = Brass, CF = Carbon Fibre, S2 = Schumacher Composite, M = Medium, S = Stiff, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = No

Ride Height mm

Wheelbase

Toe deg In ☐ Out ☐

Camber at Ride Height deg

Anti Roll Bar


Front Wing ☐ Y ☐ N ☐

Bump Steer Washers mm

Pivot Block Height ☐ H ☐ M ☐ L

Steering Arm ☐ Kit ☐ A ☐ B ☐ C

Notes:

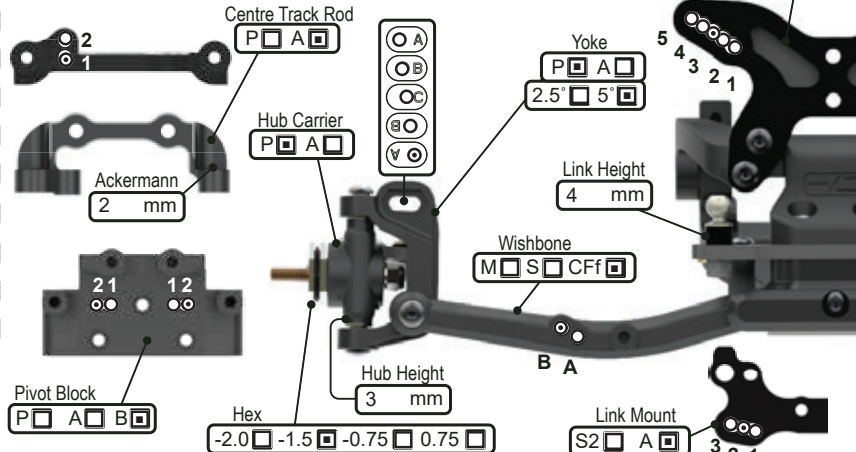

REAR SUSPENSION

KEY: P = Plastic, A = Alloy, B = Brass, CF = Carbon Fibre, S2 = Schumacher Composite, M = Medium, S = Stiff, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = No

Ride Height mm

Wheelbase

Anti-Squat

Toe

Camber at Ride Height deg

Anti Roll Bar

Wing Gurney Height mm


Rearward Shock Position ☐ Y ☐ N ☐

Driveshaft Type ☐ CVD ☐ U/J ☐

Gearbox Type ☐ Laydown ☐ Layback ☐

67,3 driveshaft
F low in hub

Notes:

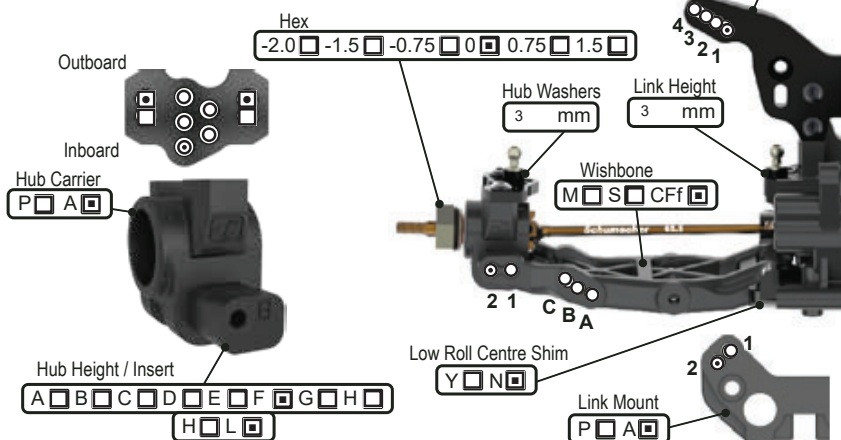

TRANSMISSION

B = Ball, 2g = 2 Gear, 4g = 4 Gear

Diff Height ☐ H ☐ M ☐ L ☐

Diff Oil

Diff Type ☐ B ☐ 2g ☐ 4g ☐

Motor

Rotor Dia. mm

Timing deg

Pinion t

Spur t

Motor Plate ☐ A ☐ CF ☐

Lock Out ☐ Y ☐ N ☐

Slipper Plates

CHASSIS

Chassis ☐ A ☐ C/F ☐

Chassis Insert

LiPo Position ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8

X Brace ☐ Y ☐ N ☐

Running Weight g

Radio Tray ☐ 1 ☐ 2 ☐ 3 ☐

Notes:

EQUIPMENT

E.S.C. ☐ Hobbywing G3

Servo

RX

LiPo

Bodyshell ☐ S2 LW / Lens

WEIGHTS

Chassis ☐ F ☐ R ☐

Rear Strap ☐ F ☐ R ☐

Radio Tray ☐ Y ☐ N ☐

Under LiPo ☐ Y ☐ N ☐

SHOCKS

KEY: i = Internal, e = External, V = Vented, S = Sealed, A = Aeration

	FRONT	REAR
Cap	☐ V ☐ S ☐ A ☐	☐ V ☐ S ☐ A ☐
Body	Kash	Kash
Oil	35 XTR cSt	30 XTR cSt
Piston	2 x 1.7 tapered	2 x 1.9 tapered
Spring	HR Agile ☐ lb/in	HR Blue ☐ lb/in
Limiters (i)	0 mm	0 mm
Stroke	21,9 mm	27,8 mm
Limiters (e)	1 mm	0 mm

Notes:

BLACK front

