

Driver and Event

Name
Date
Event
Weather
Result

Track Conditions

Surface
Grip Level
Track Condition

COUGAR
Designed for Dirt! **SVR**

Electrics and Gearing

E.S.C
Servo
Receiver
Batteries
Motor
Spur
Pinion
Cell Position

Wheels and Tyres

Rear Wheels
Rear Tyre
Rear Insert
Front Wheels
Front Tyre
Front Insert
Tyre Modifications

Diff Type

Ball ☐ Gear ☐

Additional Settings

Car Weight
Weights Added
Weight Distribution
Ride Height Front mm Rear mm
Washers between CTR and Bellcranks mm
Chassis Alloy ☐ Carbon ☐
NOTES

Rear Shocks

Oil Spring Ball Socket Short ☐ Long ☐
Piston Holes 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐
Drilled ☐ Hole Size Shock Length



Front Shocks


Oil Spring Piston Holes 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐
Drilled ☐ Hole Size Shock Length



Rear Suspension

Anti roll bar No ☐ 1.20 ☐ 1.40 ☐ 1.60 ☐

Toe-In 2° ☐ 3° ☐

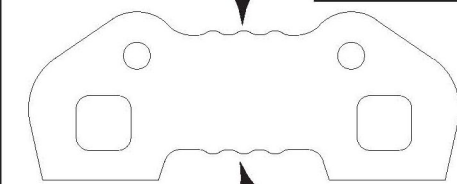


Link Washers mm

AntiSquat 3° ☐ 2° ☐ 1° ☐ 0° ☐

Link Washers mm

Wheelbase Short ☐ Med ☐ Long ☐

Rear Camber at Ride Height

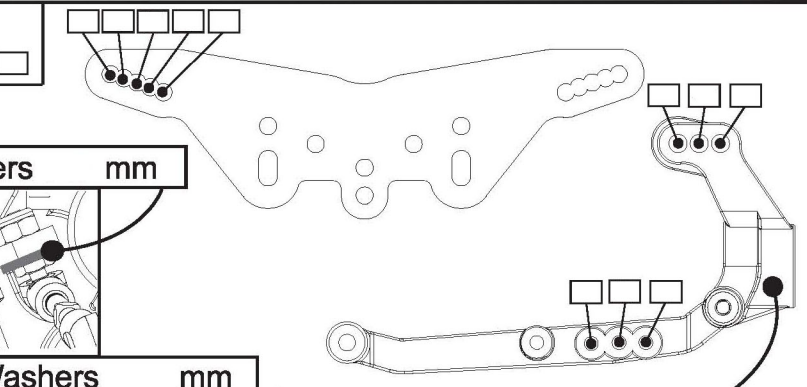

Rear Hub Carrier Alloy ☐ Std ☐



Alloy Hub Carrier +1° ☐ -1° ☐

49 ☐ 44 ☐ 39 ☐ 34 ☐

Front Suspension

Editable : Arn0 at Petitr.com

Link Washers mm

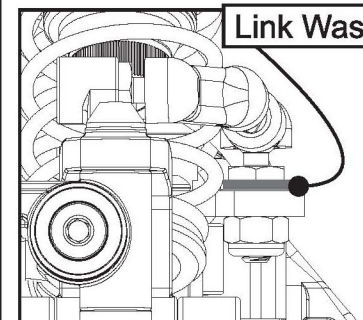


Yoke 0° ☐ 5° ☐ 7.5° ☐

Hub Carrier High ☐ Low ☐
Zero Trail (Alloy) ☐

Front Camber at Ride Height

Front Toe In

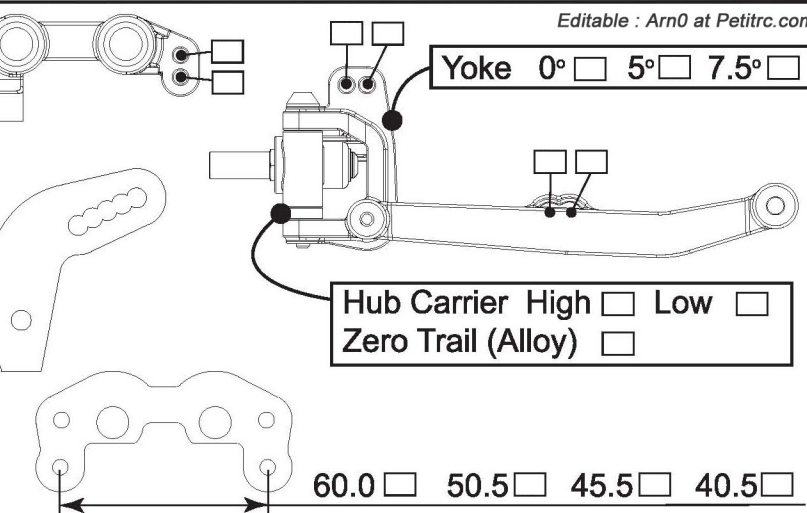

60.0 ☐ 50.5 ☐ 45.5 ☐ 40.5 ☐