



SET UP

DIFFERENTIAL OIL

FRONT	CENTER	REAR
5000 CST	10,000 CST	3,000 CST

TRANSMISSION SET UP

PISTON	17 T	SPUR GEAR	46 T	
FINAL DRIVE RATIO		ROLLOUT		
MOTOR	1400	TIMING	0	
ROTOR		ARMATURE		
ESC	RX8	BATTERIES	5S	
BRUSHLESS	PROGRAM	PUNCH	INITIAL BRAKE	AUTO BRAKE

BODY - WING

BODY	STK
WING	STK

SHOCKS

FRONT	SPRING	REAR
C= 4.8	PINK	C= 2.8
C= 5.0	BLUE	C= 3.0
C= 5.2	PURPLE	C= 3.2
C= 5.4	GREEN	C= 3.4
C= 5.6	GREY	C= 3.6
C= 5.8	YELLOW	C= 3.8
C= 6.0	WHITE	C= 4.0
C= 4.4	OTHER	C=
30 AE	OIL/CST	32.5 AE
25	REBOUND %	25
UP/LN	PISTON HOLES SIZE	CLOSED
	1.1MM	
	1.2MM	
	1.3MM	
	1.4 MM	
8hole 55	OTHER	8hole 55


TYRES

BRAND	HB
TYPE	Sticks
INSERT	AKA Black
WHEELS	


COMMENTS

Serpent Orange front Springs
Webbed shock bladders


TRACK SIZE	OPEN	MEDIUM	TIGHT
TRACK TRACTION	HIGH	MEDIUM	LOW
TRACK SURFACE	SMOOTH	MEDIUM	BUMPY
TRACK TYPE	HARD PACKED	SOFT DIRT	CLAY
	BLUE GROOVE	ASTRO TURF	GRASS
TRACK CONDITION	DRY	DUSTY	MUD
TEMP F/°C			
AIR			TRACK
LAPS			17
BEST LAPTIME			17.6 in LAP
RACE LENGTH			5
RACE RESULT			70, 1st

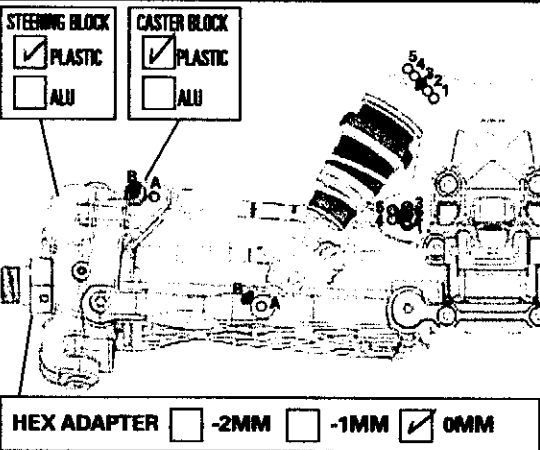


HEX ADAPTER ☐ -2MM ☐ -1MM ☒ 0MM

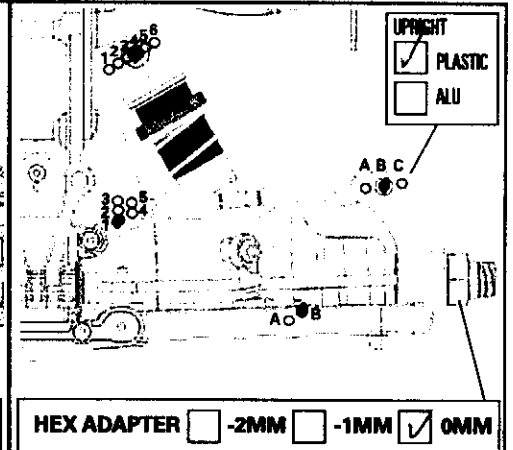


HEX ADAPTER ☐ -2MM ☐ -1MM ☒ 0MM

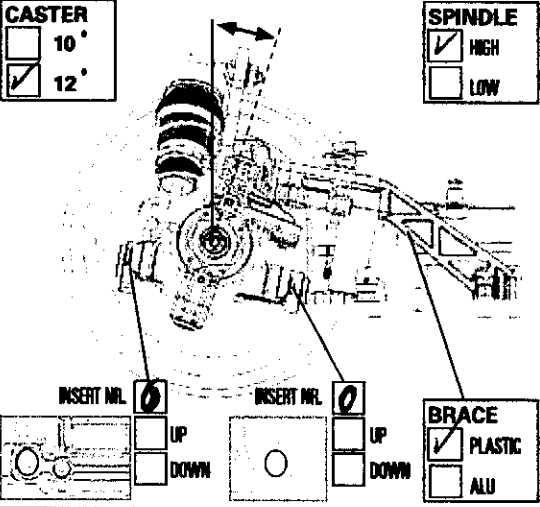


INSERT N° 0 UP DOWN

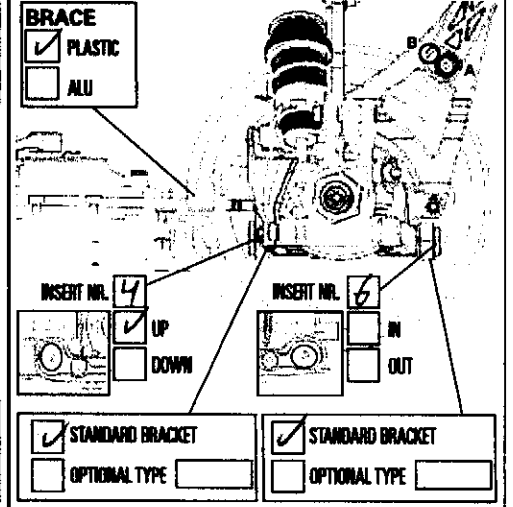


INSERT N° 6 UP DOWN

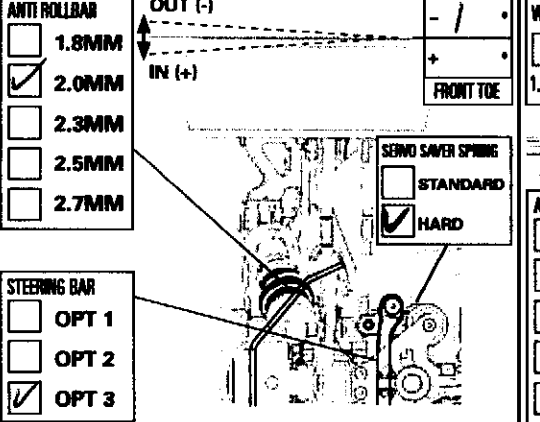


ANTI ROLL BAR ☐ 1.8MM ☒ 2.0MM ☐ 2.3MM ☐ 2.5MM ☐ 2.7MM

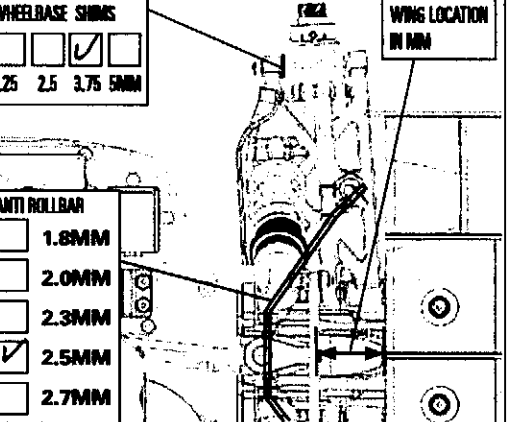

WHEELBASE SHIMS ☐ 1.25 ☒ 2.5 ☐ 3.75 5MM

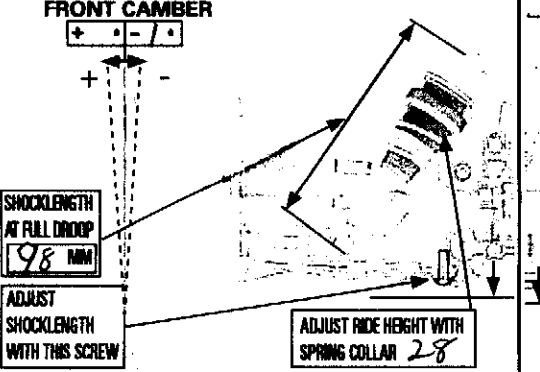

SHOCKLENGTH AT FULL DROP 98 MM
ADJUST SHOCKLENGTH WITH THIS SCREW
ADJUST RIDE HEIGHT WITH SPRING COLLAR 28

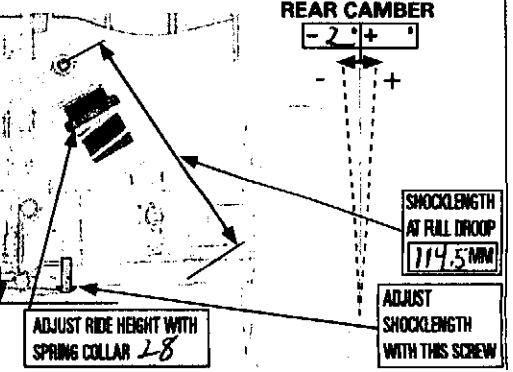

SHOCKLENGTH AT FULL DROP 114.5 MM
ADJUST SHOCKLENGTH WITH THIS SCREW
ADJUST RIDE HEIGHT WITH SPRING COLLAR 28