



# 2.0 COBBLE

## SET UP

Hupo Hönigl, Austrian Nats#1, MRC Oberaich

|                 |                                                 |                                            |                                |
|-----------------|-------------------------------------------------|--------------------------------------------|--------------------------------|
| TRACK SIZE      | <input type="checkbox"/> OPEN                   | <input checked="" type="checkbox"/> MEDIUM | <input type="checkbox"/> TIGHT |
| TRACK TRACTION  | <input type="checkbox"/> HIGH                   | <input checked="" type="checkbox"/> MEDIUM | <input type="checkbox"/> LOW   |
| TRACK SURFACE   | <input type="checkbox"/> SMOOTH                 | <input checked="" type="checkbox"/> MEDIUM | <input type="checkbox"/> BUMPY |
| TRACK TYPE      | <input checked="" type="checkbox"/> HARD PACKED | <input type="checkbox"/> SOFT DIRT         | <input type="checkbox"/> CLAY  |
|                 | <input type="checkbox"/> BLUE GROOVE            | <input type="checkbox"/> ASTRO TURF        | <input type="checkbox"/> GRASS |
| TRACK CONDITION | <input type="checkbox"/> DRY                    | <input checked="" type="checkbox"/> DUSTY  | <input type="checkbox"/> WETT  |

TEMP. F° / °C

AIR 15 TRACK 20

LAPS

BEST LAP TIME 41,7

QUALI RESULT 1

RACE RESULT 1

### DIFFERENTIAL OIL

| FRONT     | CENTER    | REAR      |
|-----------|-----------|-----------|
| 10000 CST | 15000 CST | 10000 CST |

### TRANSMISSION SET UP

|                   |              |       |               |            |    |
|-------------------|--------------|-------|---------------|------------|----|
| PINION            | 16           | T     | SPUR GEAR     | 1,5        | T  |
| FINAL DRIVE RATIO |              |       | ROLLOUT       |            | mm |
| MOTOR             | Tekin 1900kv |       |               |            |    |
| ROTOR             | std          |       |               |            |    |
| ESC               | Tekin Rx8    |       |               |            |    |
| BATTERIES         | Dualsky 4600 |       |               |            |    |
| BRUSHLESS         | PROGRAM      | PUNCH | INITIAL BRAKE | AUTO BRAKE |    |

### BODY - WING

|      |                        |
|------|------------------------|
| BODY | Avenger                |
| WING | Proline Lexan Trifects |

### SHOCKS

| FRONT                               | SPRING    | REAR                                |
|-------------------------------------|-----------|-------------------------------------|
| <input checked="" type="checkbox"/> | Orange    | <input type="checkbox"/>            |
| <input type="checkbox"/>            | Red       | <input checked="" type="checkbox"/> |
| <input type="checkbox"/>            | Pink      | <input type="checkbox"/>            |
| <input type="checkbox"/>            | Blue      | <input type="checkbox"/>            |
| <input type="checkbox"/>            | Purple    | <input type="checkbox"/>            |
| <input type="checkbox"/>            | Green     | <input type="checkbox"/>            |
| <input type="checkbox"/>            | Other     | <input type="checkbox"/>            |
| 500                                 | OIL/CST   | 350                                 |
| 10                                  | REBOUND % | 10                                  |

☐ OPEN ☒ PISTON ☐ CLOSED

### HOLES SIZE

|                                     |        |                                     |
|-------------------------------------|--------|-------------------------------------|
| <input type="checkbox"/>            | 1.1MM  | <input type="checkbox"/>            |
| <input checked="" type="checkbox"/> | 1.2MM  | <input checked="" type="checkbox"/> |
| <input type="checkbox"/>            | 1.3MM  | <input type="checkbox"/>            |
| <input type="checkbox"/>            | 1.4 MM | <input type="checkbox"/>            |
| <input type="checkbox"/>            | OTHER  | <input type="checkbox"/>            |

8 hole


8 hole

### TYRES


|        |                                                              |
|--------|--------------------------------------------------------------|
| BRAND  | Proline                                                      |
| TYPE   | Blockade X3                                                  |
| INSERT | std                                                          |
| WHEELS | Proline Velocity V2                                          |
| STOCK  | <input type="checkbox"/> BRAND <input type="checkbox"/> TYPE |

### COMMENTS

14° Alu Caster Block, Zero Alu Spindles, Shorties all the way forward

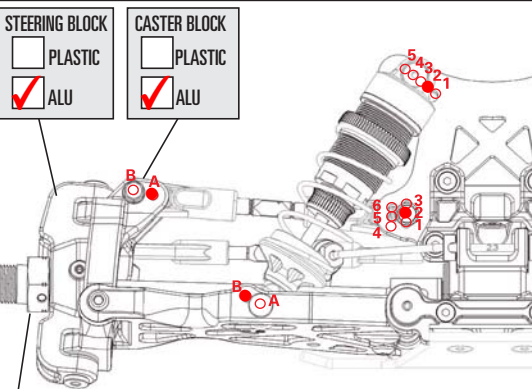

HEX ADAPTER ☒ 0mm ☐ mm

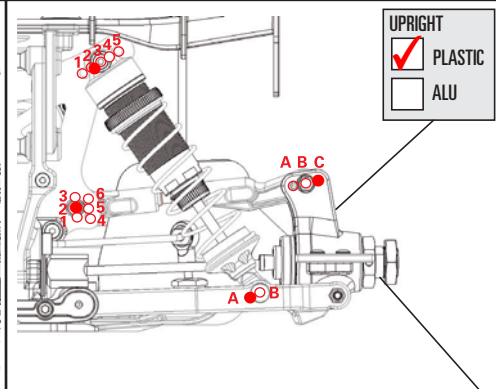

HEX ADAPTER -2mm

