



SET UP

NAME Jimbo Kvidera RACE Canadian Indoor
TRACK CITY/COUNTRY Canada

DATE
CONTACT

TRACK SIZE ☐ OPEN ☒ MEDIUM ☐ TIGHT
TRACK TRACTION ☐ HIGH ☒ MEDIUM ☐ LOW
TRACK SURFACE ☐ SMOOTH ☒ MEDIUM ☐ BUMPY
TRACK TYPE ☒ HARD PACKED ☐ SOFT DIRT ☐ CLAY
☐ BLUE GROOVE ☐ ASTRO TURF ☐ GRASS
TRACK CONDITION ☒ DRY ☒ DUSTY ☐ MUD

TEMP. F / °C

AIR TRACK

LAPS

BEST LAP TIME in LAP

RACE LENGTH

RACE RESULT

DIFFERENTIAL OIL

FRONT

CENTER

REAR

5000 CST

5000 CST

2000 CST

TRANSMISSION SET UP

PINION

15 T

SPUR GEAR

46 T

FINAL DRIVE RATIO

ROLLOUT

mm

MOTOR

Tekin 1900

TIMING

ROTOR

ARMATURE

ESC

RX 8

BATTERIES

BRUSHLESS

PROGRAM

PUNCH

INITIAL BRAKE

AUTO BRAKE

BODY - WING

BODY

Stock

WING

Stock

SHOCKS

FRONT

SPRING

REAR

C= 4.8

PINK

C= 2.8

C= 5.0

BLUE

C= 3.0

C= 5.2

PURPLE

C= 3.2

C= 5.4

GREEN

C= 3.4

C= 5.6

GREY

C= 3.6

C= 5.8

YELLOW

C= 3.8

C= 6.0

WHITE

C= 4.0

C=

OTHER

C=

40

OIL/CST

27.5

75

REBOUND %

75

OPEN

PISTON HOLES SIZE

CLOSED

1.1MM

1.2MM

1.3MM

1.4MM

OTHER

Same

TYRES

BRAND

AKA

TYPE

SS Grid

INSERT

WHEELS

COMMENTS

STEERING BLOCK


☒ PLASTIC

☐ ALU

CASTER BLOCK

☒ PLASTIC

☐ ALU

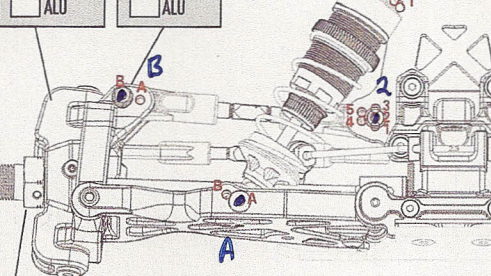

HEX ADAPTER

-2MM


-1MM

☒ 0MM

UPRIGHT

☒ PLASTIC

☐ ALU

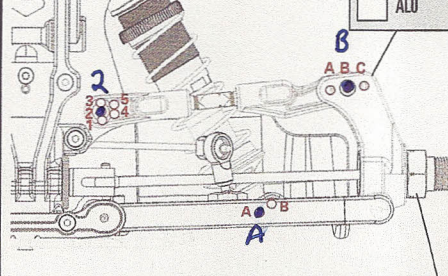

HEX ADAPTER

-2MM


-1MM

☒ 0MM

CASTER

☐ 10°

☐ 12°

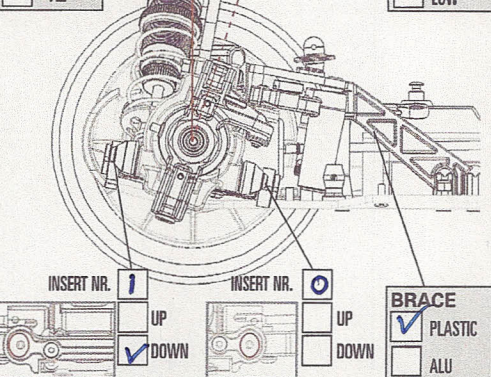

INSERT NR. 1

☐ UP

☒ DOWN

INSERT NR. 2

☐ UP

☐ DOWN

SPINDLE


☒ HIGH

☐ LOW

BRACE

☒ PLASTIC

☐ ALU

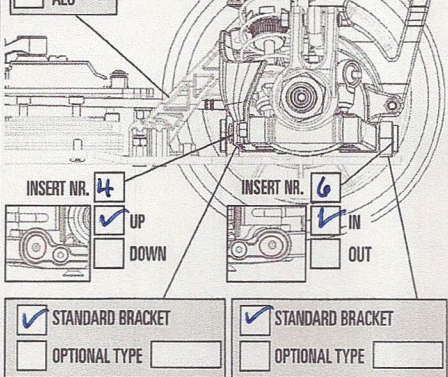

INSERT NR. 4

☒ UP

☐ DOWN

INSERT NR. 6

☒ IN

☐ OUT

☒ STANDARD BRACKET

☐ OPTIONAL TYPE

☒ STANDARD BRACKET

☐ OPTIONAL TYPE

ANTI ROLLBAR

☐ 1.8MM

☐ 2.0MM

☐ 2.3MM

☒ 2.5MM

☐ 2.7MM

OUT (-)

IN (+)

-2°

FRONT TOE

☐ 1.8MM

☐ 2.0MM

☐ 2.3MM

☒ 2.5MM

☐ 2.7MM

SERVO SAVER SPRING

☒ STANDARD

☐ HARD

STEERING BAR

☐ OPT 1

☐ OPT 2

☒ OPT 3

WHEELBASE SHIMS

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

WING LOCATION IN MM STD

ANTI ROLLBAR

☐ 1.8MM

☐ 2.0MM

☐ 2.3MM

☒ 2.5MM

☐ 2.7MM

FRONT CAMBER

+2.5°

SHOCKLENGTH AT FULL DROOP

99 MM

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

RIDE HEIGHT 29 MM

REAR CAMBER

-2.5°

SHOCKLENGTH AT FULL DROOP

114 MM

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

RIDE HEIGHT 30 MM