

SPYDER SRX2

Mid-Motor Set-up Sheet

Driver: _____

Event: _____

arcs raceway

Date: _____

Track: _____

Track-Temp _____


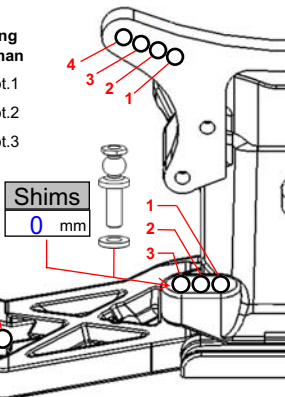
Air-Temp _____

Country/City/State: _____

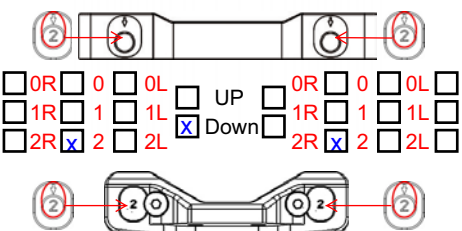
Track Conditions

☒ Indoor	☒ Tight ☐ Medium	☒ Smooth	☒ Hard Packed ☐ Grass ☐ Astro-turf ☐ Clay	☐ Low Bite ☐ High Bite
☐ Outdoor	☐ Open ☐ _____	☐ Rough	☐ Blue Groove ☐ Carpet ☐ Multi-Surface ☐ _____	☒ Med Bite ☐ _____


Front Suspension

Sway Bar: ☐ Yes Size _____ mm
☒ NoRide Height: 24 mmCamber: -1 °Toe: ☐ In 1 °
☒ Out☒ Stock / 25° ☐ Brass
☐ AluminumCaster Block Inserts
☒ 0 Deg
☐ + 2.5 Deg
☐ - 5 DegSpindle Shims
☒ ☐Bump Steer
Shims
1 mmSteering Ackerman
☐ Opt.1
☒ Opt.2
☐ Opt.3

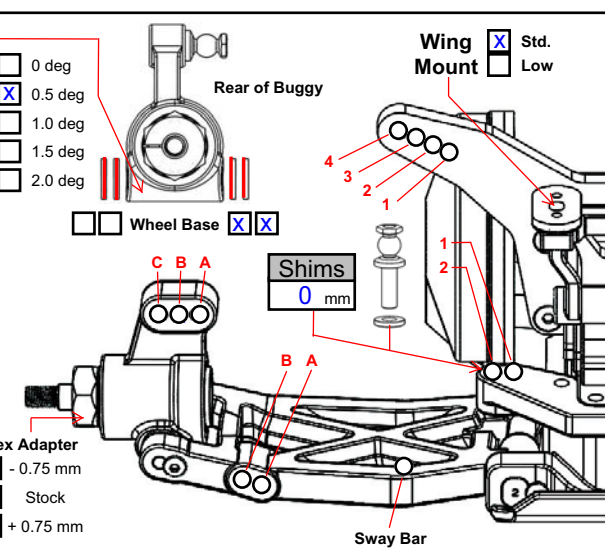
Rear Suspension

Sway Bar: ☐ Yes Size _____ mm
☒ NoRide Height: 24mm mmCamber: -1 °RR-FR-Toe-Block ☒ Stock ☐ Brass

☐ 0R ☒ 0 ☐ 0L	☐ UP ☐ 0R ☐ 0 ☐ 0L	Toe-In: <u>3</u> °
☐ 1R ☐ 1 ☐ 1L	☐ Down ☐ 1R ☐ 1 ☐ 1L	
☐ 2R ☒ 2 ☐ 2L	☐ 2R ☒ 2 ☐ 2L	
☐ 0R ☒ 0 ☐ 0L	☐ UP ☐ 0R ☒ 0 ☐ 0L	
☐ 1R ☐ 1 ☐ 1L	☐ Down ☐ 1R ☐ 1 ☐ 1L	Anti-Squat: <u>2</u> °
☐ 2R ☐ 2 ☐ 2L	☐ 2R ☐ 2 ☐ 2L	


Outboard Toe-In
☐ 0 deg
☒ 0.5 deg
☐ 1.0 deg
☐ 1.5 deg
☐ 2.0 degBallast Weight
☐ Yes ☒ NoHex Adapter
☐ - 0.75 mm
☒ Stock
☐ + 0.75 mm

Rear of Buggy

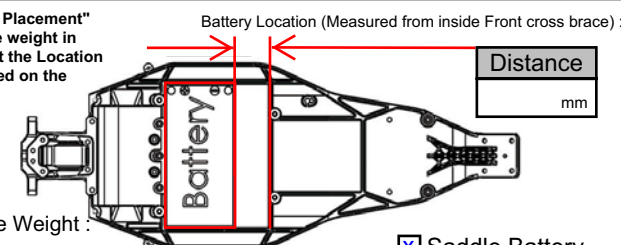
Wing Mount ☒ Std.
☐ Low

Shocks

Front	Rear
Shock Piston (1): <u>1.3</u> mm X <u>4</u>	<u>1.3</u> mm X <u>4</u>
Shock Brand/Oil: <u>32.5 ae</u>	<u>30 ae</u>
Shock Spring: <u>green ae</u>	<u>white ae</u>
Shock Limiters (2): <u>2</u> mm	<u>2</u> mm
Shock Length (3): <u>86.75</u> mm	<u>101.5</u> mm
Rebound (4): <u>2</u> mm	<u>2</u> mm
Bladder / Seal (5): <u>seal</u>	<u>seal</u>
Spring Bucket: <u>high</u>	<u>low</u>



Battery-Weight

"Weight Placement"
Type the weight in grams at the Location it's placed on the chassis

Vehicle Weight: _____ Grams

Weight Bias - Front: _____ % Rear: _____ %

☒ Saddle Battery
☐ Shorty Battery

Gearing

Spur Gear (A): 78 T
Pinion Gear (B): 22 T
Gear Ratio (A/B)=C: _____
Final Drive (C*2.43): _____

Differential

Diff Height
☐ High ☒ Med ☐ Low
☒ Ball Differential
☐ Gear Differential
Oil cst/wt: _____

Electrics

Radio: _____
ESC: _____
Motor: _____
Servo: _____
Battery: _____

Body-Wing

Body: stock
Wing Rear: _____
Wing Width: _____
Wing Lip: _____
Wing Angle: _____
Wing Front: _____

Tires

	Front	Rear
Brand:	<u>proline</u>	<u>jconcepts</u>
Model Name:	<u>ion</u>	<u>pressure point</u>
Compound:	<u>m4</u>	<u>green</u>
Insert Type:	<u>stock</u>	<u>aka</u>
Wheels:	<u>serpent</u>	<u>serpent</u>
Tire Additive:	<u>fast guy</u>	<u>fast guy</u>

Comments
