

SPYDER SRX2

Set-up Sheet

Driver: Joe Sorwell

Date: 12/14/13

Track-Temp Air-Temp

Event: Toy for Tots

Track: Leisure Hours

Country/City/State: Joliet, IL

Track Conditions

☒ Indoor ☐ Tight ☒ Medium ☐ Smooth ☒ Hard Packed ☐ Grass ☐ Astro-turf ☒ Clay ☐ Low Bite ☐ High Bite
☐ Outdoor ☐ Open ☐ Rough ☐ Blue Groove ☐ Carpet ☐ Multi-Surface ☐ Med Bite


Front Suspension

Sway Bar: ☐ Yes Size _____ mm ☒ No



Ride Height: 24 mm

Camber: -1 °


Toe: ☐ In ☒ Out 1 °



Caster Block Inserts: ☒ + ☐ 0 Deg ☒ 2.5 Deg ☐ 5 Deg

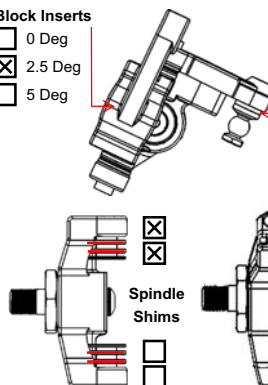

Steering Ackerman: ☐ Opt.1 ☒ Opt.2 ☐ Opt.3

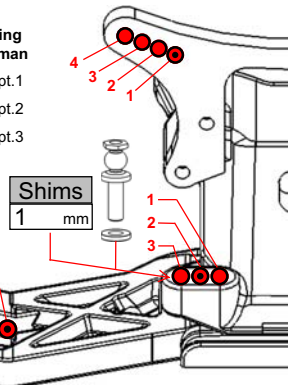


Rear Suspension

Sway Bar: ☐ Yes Size _____ mm ☒ No


Ride Height: 24 mm

Camber: 1.5 °


RR-FR-Toe-Block ☐ Stock ☒ Brass

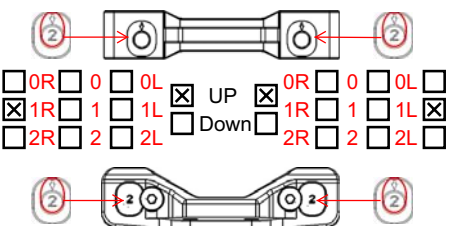


☐ 0R ☐ 0 ☐ 0L ☐ UP ☐ 0R ☐ 0 ☐ 0L
☒ 1R ☐ 1 ☐ 1L ☒ Down ☒ 1R ☐ 1 ☐ 1L
☐ 2R ☐ 2 ☐ 2L ☒ 2R ☐ 2 ☐ 2L

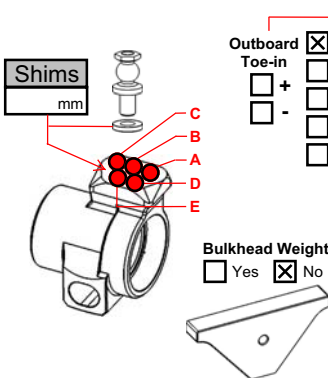

Outboard Toe-in: ☒ 0 deg ☐ 0.5 deg ☐ 1.0 deg ☐ 1.5 deg ☐ 2.0 deg




Hex Adapter: ☒ - 0.75 mm ☐ Stock ☐ + 0.75 mm

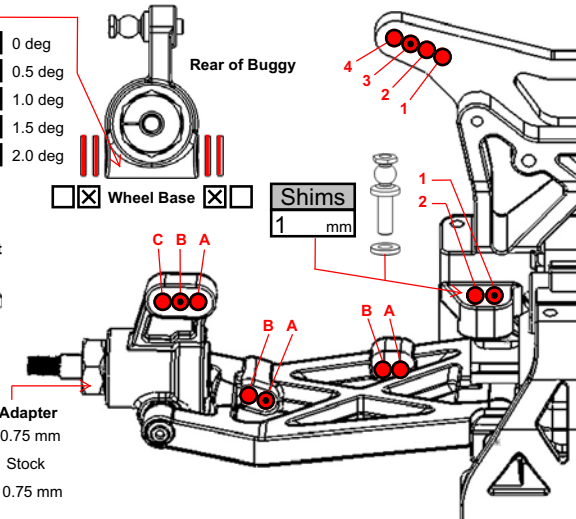

Shocks


	Front	Rear
Shock Piston (1):	1.6 mm X 2	1.6 mm X 2
Shock Brand/Oil:	Asc 32.5	Asc 30
Shock Spring:	Red	Pink
Shock Limiters (2):	3 mm	2 mm
Shock Length (3):	20.6 mm	27.2 mm
Rebound (4):	2 mm	3 mm
Bladder / Seal (5):	Seal	Seal
Spring Bucket:	Long	Shrt



Battery-Weight

Weight Placement (Mark with "x") Battery Location (Measured from inside Front cross brace):

Weight of "x" _____ Grams

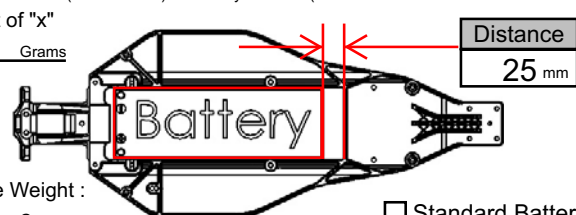

Vehicle Weight: _____ Grams

Weight Bias - Front: _____ % Rear: _____ %

☐ Standard Battery ☒ Shorty Battery

Gearing

Spur Gear (A): 78 T
 Pinion Gear (B): 23 T
 Gear Ratio (A/B)=C: _____
 Final Drive (C*2.43): _____

Differential

Diff Height: ☐ High ☒ Med ☐ Low
☒ Ball Differential ☐ Gear Differential
 Oil cst/wt: _____

Electrics

Radio: M11x
 ESC: R10
 Motor: Reedy 7.5
 Servo: 100ss
 Battery: 4600

Body-Wing

Body: Serpent
 Wing Rear: Serpent
 Wing Width: 6.5
 Wing Lip: Full
 Wing Angle: 2
 Wing Front: _____

Tires

	Front	Rear
Brand:	Jc	Jc
Model Name:	Barcode	Barcode
Compound:	Gold	Gold
Insert Type:	3/4 & 1	Duratrax
Wheels:		
Tire Additive:		

Comments

Inline electronics, rx in front of batt
 Alum steering rack, vented slipper
 Tapered pistons