

Date	Track			
Driver	Composition:			
	Size:	☐ Open	☐ Mixed	☐ Tight
	Traction:	☐ High	☐ Medium	☐ Low
	Surface:	☐ Smooth	☐ Both	☐ Bumpy

ESC	Motor	Battery	Battery Configuration		Tires	Tire Insert	Wheel	Body
Cayote	Cayote		Shorty: _____ V x _____ Pcs	☐ STF ☐ STM ☐ STR ☐ SD2 (Standard 2S) ☐ SD4 (Standard 4S)	☐ Inward ☐ Outward ☐ Outward Only	Model: _____		
crest 8A	2200 KV	6400 Mah	Standard: _____ V x _____ Pcs			Compounds: _____		

Diff Gear Set-Up

	Front	Center	Rear
Diff. Fluid	# _____	# _____	# _____
	_____ x _____ T	_____ x _____ T	_____ x _____ T

Shock Set-Up

Cap ☐ Bladder ☐ Emulsion	Front	Rear
Oil Brand: _____	# _____	# _____
Spring Collar Spacer	_____ mm	_____ mm
Pistons	ϕ _____ x _____	ϕ _____ x _____
Spring		

Ride Height


Front	Rear
_____ mm	_____ mm

Rebound

Front	Rear
_____ mm	_____ mm

Camber Angle


Front	Rear
+ _____ ° - _____ °	+ _____ ° - _____ °

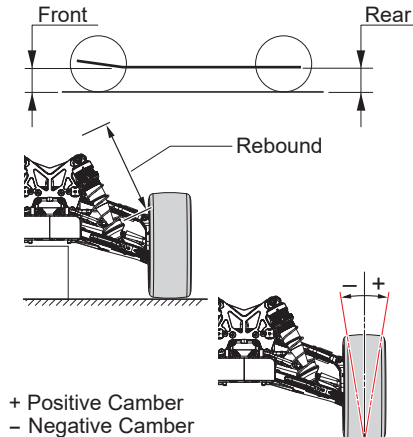

Wheelbase _____ mm

Track Width _____ mm

Shock Mount Position



Sus. Arm

Front	☐ In ☐ Out
Rear	☐ In ☐ Out

Rear Hub


☐ Plastic
☐ Aluminum

Hub Carrier Bush

☐ Plastic

☐ _____


Rear Upper Arm Position

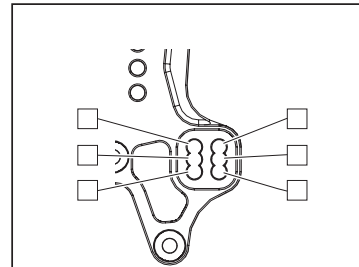

☐ 0mm
☐ 2mm
☐ 3mm
☐ 5mm

HEX:

☐ 4.5mm
☐ 5.5mm
☐ 6.5mm




Arm

Front	Rear
☐ Soft ☐ Hard (Std.) ☐ _____	☐ Soft ☐ Hard (Std.) ☐ _____

Front Upper Arm

☐ A Arm ☐ Linkage


Front Upper Arm Position



Front Hub Carrier


☐ Plastic ☐ Aluminum

☐ 16° ☐ 20° ☐ _____ °

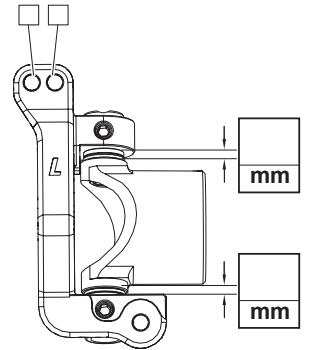

Toe Angle

Front	
+ _____ °	_____ °
- _____ °	_____ °

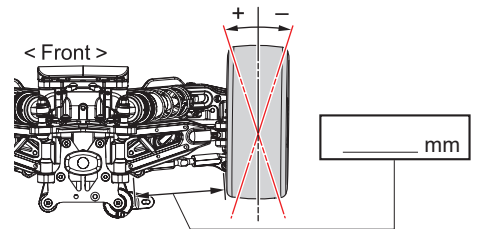


Front Toe-In

FF	FR

Rear Toe-In

RF	RR

Steering Plate



Sway Bar

Front	Rear
ϕ _____	ϕ _____
_____ mm	_____ mm



Wing

☐ High Force
☐ Holes
☐ Without

Wing Position / Angle

☐ H
☐ M
☐ L
☐ H
☐ M
☐ L

☐ 0°
☐ +1.5°
☐ +3°

Notes