SPARKO
WWW.SPARKORACING.COM

FORMULA EIGHT ELECTRIC
SETUP SHEET

Date: 20/09/26

Driver: Adri Pariente

Track: Sonseca

Composition:
Size: ☐Open ☐Mixed ☐Tight
Traction: ☑High ☐Medium ☐Low
Surface: ☐Smooth ☑Both ☐Bumpy

ESC	Motor	Battery	Battery Configuration	Tires	Tire Insert	Wheel	Body
Cors ____ A	Cors 210 KV	Cors 710 Mah	Shorty : ____ V x ___ Pcs Standard : ____ V x ___ Pcs Shorty ☐STF ☐STM ☐STR ☑SD2 (Standard 2S) ☐SD4 (Standard 4S) ☑Inward ☐Outward ☐Outward Only	Joker 19/33	Black	6mik	

Diff Gear Set-Up


	Front	Center	Rear
Diff. Fluid	# 100	# 100	# 10
	13 x 43 T	16 x 46 T	13 x 43 T

Shock Set-Up

Cap ☐Bladder ☑Emulsion	Front	Rear
Oil Brand: XTR	# 600	# 550
Spring Collar Spacer	mm	mm
Pistons	φ 8 x 1.2	φ 8 x 1.3
Spring	Gold	Yellow

Ride Height

Front	Rear
21 mm	27 mm

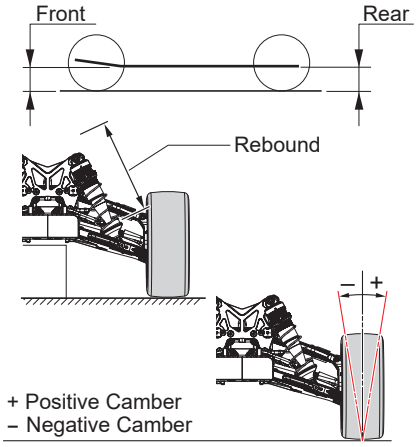

Rebound

Front	Rear
104 mm	126 mm


Camber Angle

Front	Rear
+ ° –	+ ° –

Wheelbase ____ mm

Track Width ____ mm


Shock Mount Position



Sus. Arm

Front	☐ In	☑ Out
Rear	☑ In	☐ Out


Rear Upper Arm Position

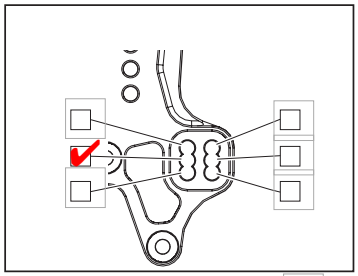

Rear Hub

☑Plastic
☐Aluminum

Hub Carrier Bush
☑Plastic
☐ ____

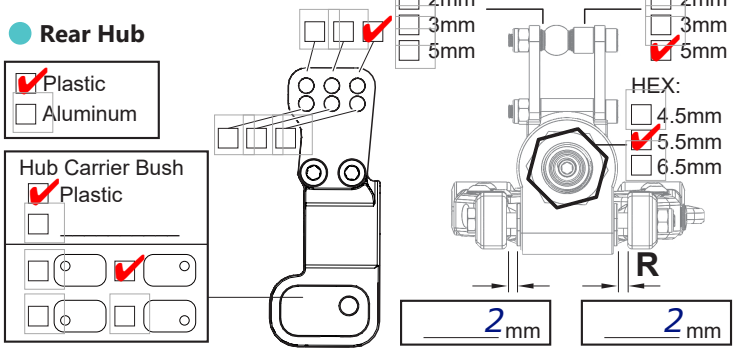

Arm

Front	Rear
☐ Soft	☐ Soft
☑ Hard (Std.)	☑ Hard (Std.)
☐ ____	☐ ____


Front Hub Carrier


☐ Plastic ☑ Aluminum
☐ 16° ☑ 20° ☐ ____ °

Front Upper Arm

☐ A Arm ☑ Linkage


Front Upper Arm Position




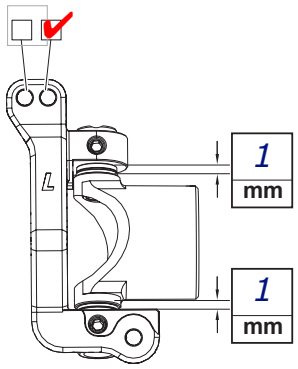


Toe Angle



Front	
+	°
–	°

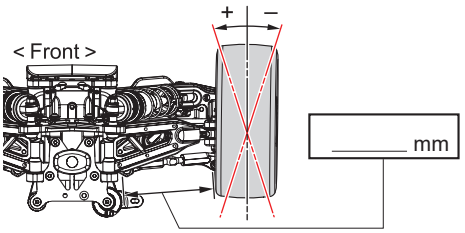


Front Toe-In

FF 
FR 

Rear Toe-In


RF 
RR 

Steering Plate




Sway Bar


Front	Rear
φ 2.4	φ 2.7
0 mm	0 mm



Wing



Wing Position / Angle

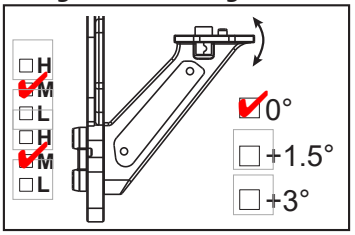

Notes

Arn0