

S12-1M

Track Conditions

Size: ☐ Open ☐ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☐ Low
Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Name: _____
Date: _____
Track: _____

Diff. Oil

Rear: _____

Diff. Type

☐ Gear Ditt
☐ Ball Ditt

Electric System

ESC Type: _____

Motor Type: _____

Motor Gear/Spur Gear: _____

Battery Type A: Saddle Pack _____
B: Shorty Pack _____

Tire

Front

Rear



Type: _____

Type: _____

Foam: _____

Foam: _____

Front Suspension

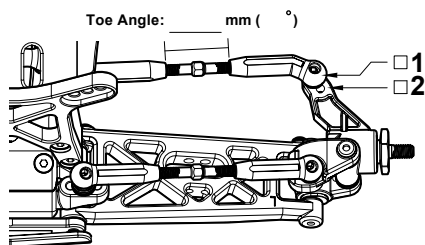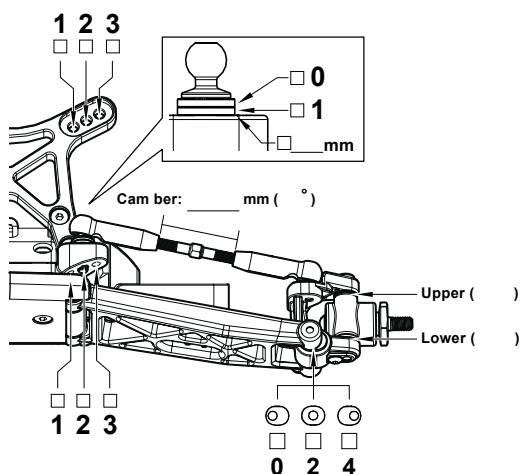

Front Shocks

Oil: _____
Pistons: _____
Spring: _____
Spacer: _____ mm

Front Lower Arm Holder Adjustment



☐ 0.5mm ☐ 1mm

Front Lower Arm Holder



☐ 25° ☐ 30°

Ride High: _____ mm

Body: _____
Wing: _____



Rear Suspension

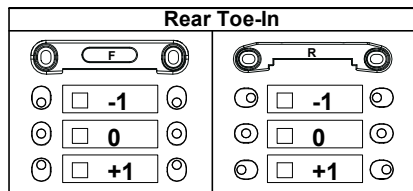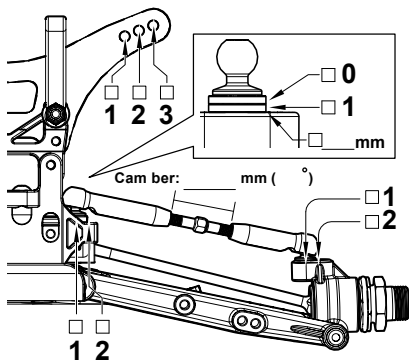

Rear Shocks

Oil: _____
Pistons: _____
Spring: _____
Spacer: _____ mm

Wheelbase F _____ mm
adjustment R _____ mm

Sway bar ☐ Use _____ mm
☐ None

Ride High: _____ mm

Notes: _____

Wing spacer _____ mm

