

Conditions: ☐ Indoor ☐ Outdoor ☐ Dry ☐ Wet ☐ Blue Groove ☐ Hard Packed

Composition: ☐ Astroturf ☐ Clay ☐ Carpet ☐ Dirt ☐ Grass ☐ Other: _____

Size: ☐ Open ☐ Medium ☐ Tight **Traction:** ☐ High ☐ Medium ☐ Low **Surface:** ☐ Smooth ☐ Medium ☐ Bumpy

Differential

☐ Ball: _____ ☐ Gear - Oil: _____

Tire & Inserts

Front

Rear

Tire: _____

Insert: _____

Notes: _____

Electronics

Motor: _____ Spur/Pinion: _____

Battery: _____


Battery Position: _____

ESC: _____

ESC Settings: _____

Servo: _____ Receiver: _____

Front Suspension

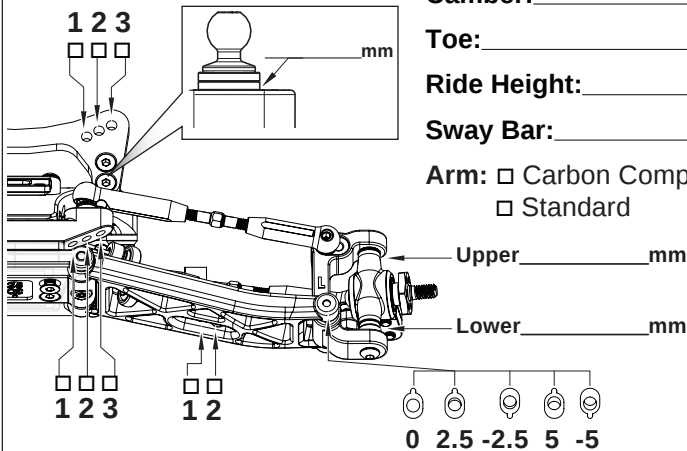

Camber: _____

Toe: _____


Ride Height: _____

Sway Bar: _____


Arm: ☐ Carbon Composite Hard
☐ Standard

Upper _____ mm

Lower _____ mm

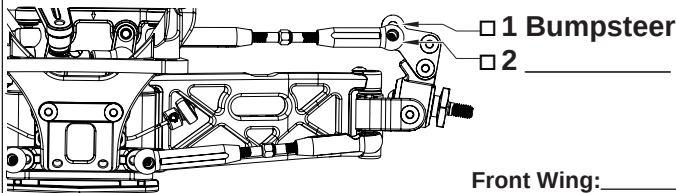

Front Wing: _____



Oil: _____

Piston: _____

Spring: _____

Preload: _____

Limiter - In: _____ Out: _____


Length: _____

Bulkhead Adjustment


☐ 0.5mm ☐ 1mm

Bulkhead


☐ 25° ☐ 30°



☐ Standard
☐ 25g Brass

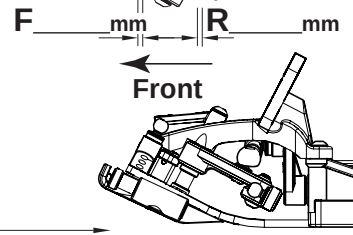



Rear Suspension

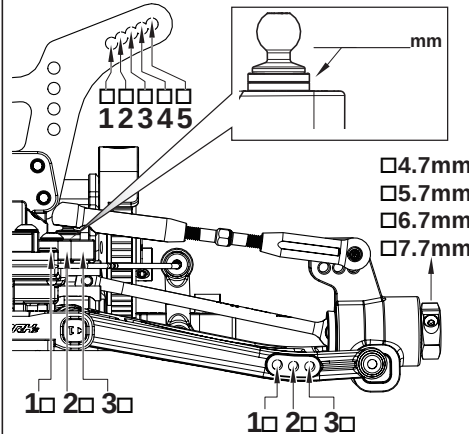

Rear Wing: _____

Body: _____

Front Insert




Front


F _____ mm R _____ mm

Wing Angle ☐ 0 ☐ -3 ☐ 3

Wing Position



Differential Position




Camber: _____

Ride Height: _____

Sway Bar: _____

Arm: ☐ Carbon Composite Hard
☐ Standard

Side Guard: ☐ Carb Comp Hard
☐ Standard



Rear Toe-In

F

☐ 0.5 ☐ 1.0

R

☐ 0.5 ☐ 1.0

Oil: _____


Piston: _____

Spring: _____

Preload: _____

Limiter - In: _____ Out: _____

Length: _____



Notes