

Race time / Lap: _____

Best lap: _____

S350EvoII

1/8 Off-Road Nitro Racing Buggy


Name: _____
Date: _____
Track: _____

Diff. Oil
Front: # _____
Center: # _____
Rear: # _____



Tire

Front: _____ Rear: _____
Type: _____ Type: _____
Foam: _____ Foam: _____

Front Suspension

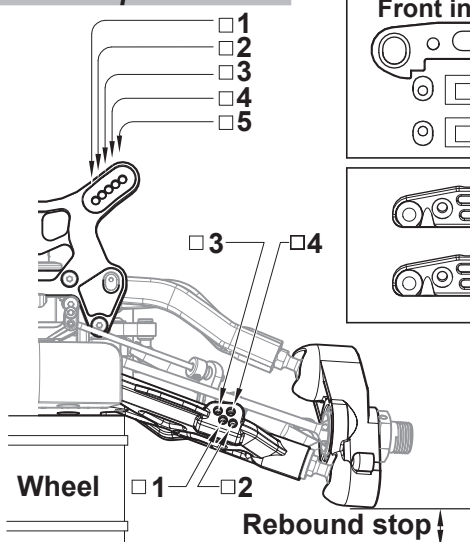

Front in-Board Toe



Track Conditions


Size: ☐ Open ☐ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☐ Low
Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Engine

Type: _____
Gasket: _____ mm Muffler: _____
Plug: _____ Fuel: _____

Clutch

Clutch shoes: _____
Spring: _____ mm
Clutch bell / Spur gear: _____



Track width _____ mm

Camber angle Upper _____ mm
Lower _____ mm

Toe angle _____ mm


Rebound stop _____ mm

Sway bar ☐ Use _____ mm
☐ None


Front Shocks

Oil: _____
Pistons: _____
Spring: _____
Spacer: _____ mm


Steering Ackerman



_____ mm
Notes: _____

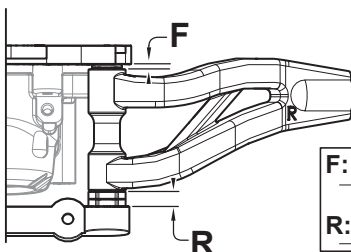


F: _____ mm
R: _____ mm

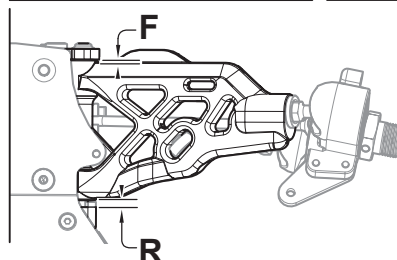


F: _____ mm
R: _____ mm

Camber Angle
L: _____ °
R: _____ °

Rear Suspension

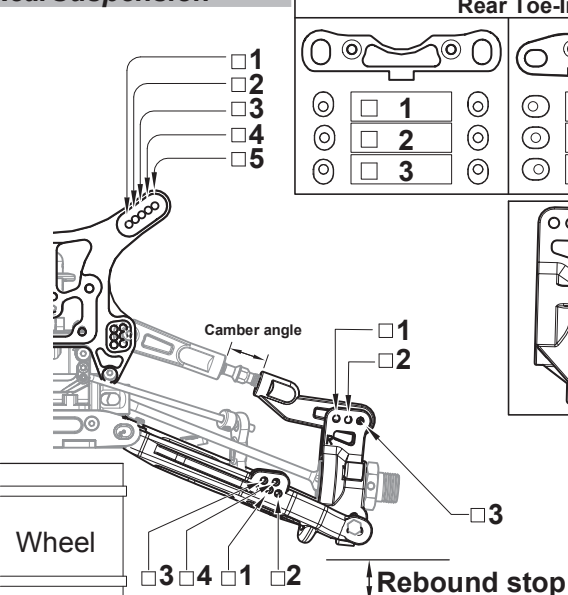

Rear Toe-In

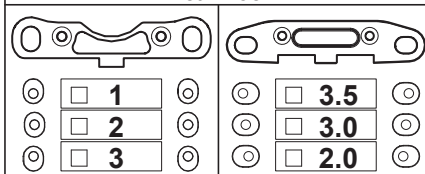

Upper arm position



Camber angle _____ mm
Rebound stop _____ mm



Rear Shocks

Oil: _____
Pistons: _____
Spring: _____
Spacer: _____ mm

Body:

Wing:

Wing Position



Wheelbase adjustment F _____ mm
R _____ mm

Sway bar ☐ Use _____ mm
☐ None

F: _____ mm
R: _____ mm

Notes: _____