

S35-3

1/8 Off Road Nitro Power Pro Buggy

Name: _____

Date: _____

Track: _____

Diff. Oil

Front: # _____

Center: # _____

Rear: # _____

Tire

Front

Type: _____

Foam: _____

Rear

Type: _____

Foam: _____

Track Conditions

Size: ☐ Open ☐ Med. ☐ Tight

Traction: ☐ High ☐ Med. ☐ Low

Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Engine

Type: _____

Gasket: _____ mm Muffler: _____

Plug: _____ Fuel: _____


Clutch

Clutch shoes: _____




Spring: _____ mm

Clutch bell / Spur gear: _____

Front Suspension

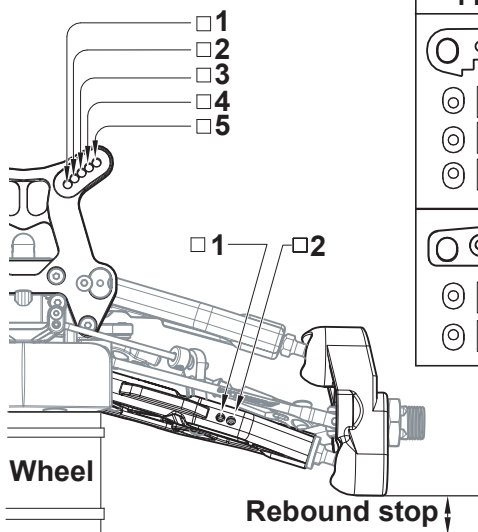

Front Toe-In



Track width _____ mm

Camber angle Upper _____ mm

Lower _____ mm

Toe angle _____

Rebound stop _____ mm

Sway bar _____ mm

Front Shocks


Oil: _____

Pistons: _____


Spring: _____

Spacer: _____ mm

Camber Angle



Steering Ackerman




Notes



Body: _____

Wing: _____


Rear Suspension

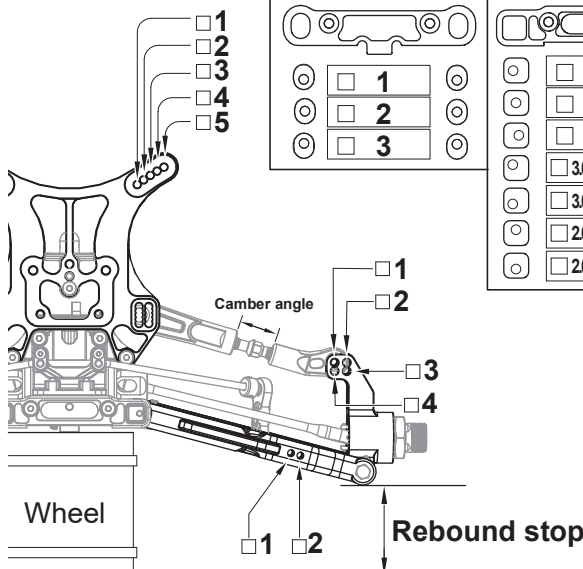

Rear Toe-In



Upper arm position



Camber angle _____ mm

Rebound stop _____ mm

Rear Shocks


Oil: _____

Pistons: _____

Spring: _____




Spacer: _____ mm

Wing Position



Wheelbase F _____ mm R _____ mm

Sway bar _____ mm



Notes