



FRONT SUSPENSION




#Washers _____

Ride Height _____ mm

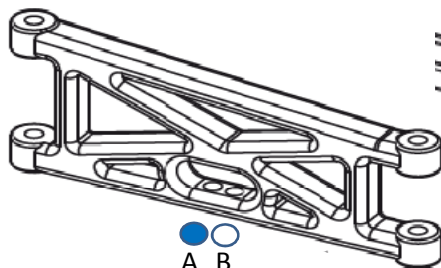

Caster Block

● 25° ○ Stock ● Alum
○ 30°




Camber _____ °


Toe In/Out _____ °

Comments: 2mm Washer between shock tower & blue mount. Front Alum hinge mount w/brass weight.

REAR SUSPENSION




● 1 Wing Height
○ 2

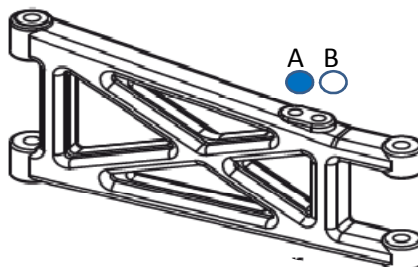

Ride Height _____ mm

Wheelbase

● Short
○ Middle
○ Long





Hub Toe

● 0° (Standard)
○ 0.5° (Opt)

Camber _____ °

Anti-Squat 3 °

Sway Bar 0 mm

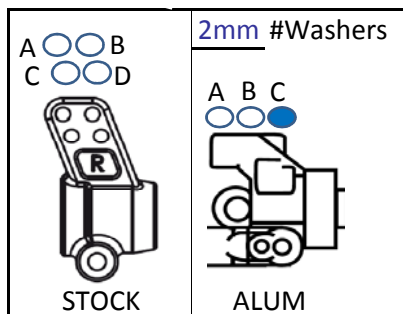

Comments:

FRONT SHOCKS

PISTON# Stock

SPRING Stock(black)

LIMITERS _____

OIL 35 wt BRAND _____

REAR SHOCKS

PISTON# Stock

SPRING Stock(black)

LIMITERS _____

OIL 30 wt BRAND _____

SHOCK LENGTH

_____ mm _____ mm

FRONT REAR

FRONT TIRES & WHEELS

TIRES Panther Bobcats-Clay

INSERTS _____ WHEELS TQ

REAR TIRES & WHEELS

TIRES Panther Switch 2.0-Clay

INSERTS _____ WHEELS TQ

Traction Compound

BODY TQ Stock

CAR WEIGHT _____

MOTOR Tekin RS 10.5

BATTERY Team Checkpoint 5000, 40C

WING _____ ANGLE: ○ 4° ○ 7° ○ 10°

PINION/SPUR _____ / _____

PLACEMENT: ● FRONT ○ REAR

TRACK CONDITIONS:

COMMENTS: TQ & Winner of 2010 Chi-Town Shootout