

FACTORY X-6³ Setup sheet


Arm0 - V1.1

Driver: _____ Date: _____
 Event: _____
 Track: _____


Track Condition

Composition: ☐Astroturf ☐Blue Groove ☐Carpet ☐Clay ☐Dirt ☐Grass ☐Other: _____
 Layout: ☐Open ☐Tight Surface: ☐Bumpy ☐Smooth Grip: ☐Low ☐Medium ☐High

Front Suspension



Toe: _____ Axles: ☐Trailing ☐Inline
 Camber: _____ Caster Block: ☐20° ☐25° ☐30°
 Ride Height: _____ Ackermann: ☐Forward ☐Back



Forward ☐ Hub Position ☐Back


Front Shocks

Brand: _____
 Spring: _____
 Piston: _____
 Oil: _____ Emulsion: ☐Yes ☐No
 Limiters: _____



Front Tires

Tire: _____
 Insert: _____
 Wheels: _____


Rear Suspension



Camber: _____
 Ride Height: _____
 Transmission Height: _____
 Swaybar: _____

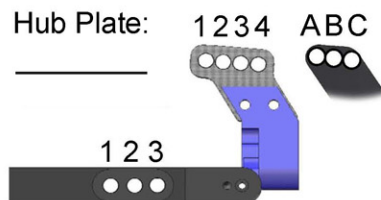

Antisquat: _____

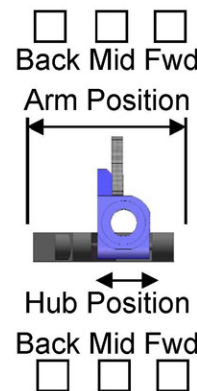


Rear Shocks

Brand: _____
 Spring: _____
 Piston: _____
 Oil: _____ Emulsion: ☐Yes ☐No
 Limiters: _____

Rear Tires

Tire: _____
 Insert: _____
 Wheels: _____

Weighs:

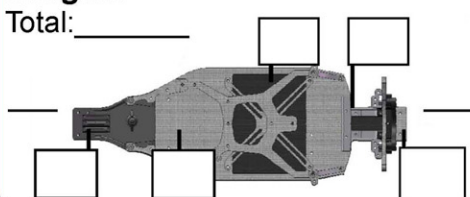

Comments:

Body & wing: _____

Battery: _____
 Motor: _____
 Gearing: _____
 ESC: _____
 ESC Settings: _____