SET-UP SHEET

XRAY XB4

Alterations by Arn0 at PetitRC.com

RACE	Tasmanian state titles 2013
TRACK	Goodwood

NAME	Ashley Peeler		
CITY	Goodwood	COUNTRY	Aus
CONTACT	ashleypeeler@mac.com	DATE	24/02/13

TEMPERATURE	AIR 15-28 °F or C°	TRACK	°F or °C

LAPS		BEST LAP TIME	20.059 sec
QUALIFING POSITION	1	FINAL POSITION	2

TRACK SIZE	☐ OPEN	☑ MEDIUM	☐ TIGHT	
TRACK TRACTION	☑ HIGH	☐ MEDIUM	☐ LOW	
TRACK SURFACE	☑ SMOOTH	☑ MEDIUM	☐ BUMPY	
TRACK TYPE	☑ HARD PACKED	☐ SOFT DIRT	☐ CLAY	
	☐ CARPET	☑ BLUE GROOVE	☐ ASTRO TURF	☐ GRASS
TRACK CONDITION	☑ DRY	☐ DUSTY	☐ WET	☐ MUD

DIFFERRENTIAL

FRONT		REAR
☐ GEAR DIFF ☐ BALL DIFF	TYPE	☐ GEAR DIFF ☐ BALL DIFF
☑ COMPOSITE ☐ METALLIC	PINION	☑ COMPOSITE ☐ METALLIC
☑ COMPOSITE	CROWN GEAR	☑ COMPOSITE
New gear		new gear
10000 cSt	OIL	7000 cSt

GEARING

PINION	18 T	SPUR GEAR	84 T

SHOCKS

FRONT		REAR
3 Dots	SPRINGS	2 Dots
45 cSt	OIL	32.5 cSt
0 %	REBOUND	0 %
3 mm	DOWNSTOP SHIM	3 mm
YES ☑ ☐ NO	UPSTOP TRAVEL ORING	YES ☑ ☐ NO

PISTONS (DIAMETER HOLES)

FRONT		REAR
☐ 2 HOLES	ø1.0mm	☐ 2 HOLES
☐ 3 HOLES	ø1.1mm	☐ 3 HOLES
☐ 6 HOLES	ø1.2mm	☐ 6 HOLES
	ø1.3mm	
	ø1.4mm	

CUSTOM PISTONS (DIAMETER HOLES)

2 HOLES	ø1.6 mm	ø1.7 mm	2 HOLES

ANTI ROLL BAR

FRONT		REAR
1.2 mm	THICKNESS	1.2 mm

TIRES

FRONT		REAR
AKA rebar control	TYPE	AKA rebar control
AKA closecell	INSERTS	AKA closecell
STD	WHEELS	JC MONO

OTHER

MOTOR	Savox 6.5
ROTOR	STD
TIMING	+12%
ESC	Nosram comet HD
BATTERIES	Nosram 5000
BODY	STD

COMMENTS
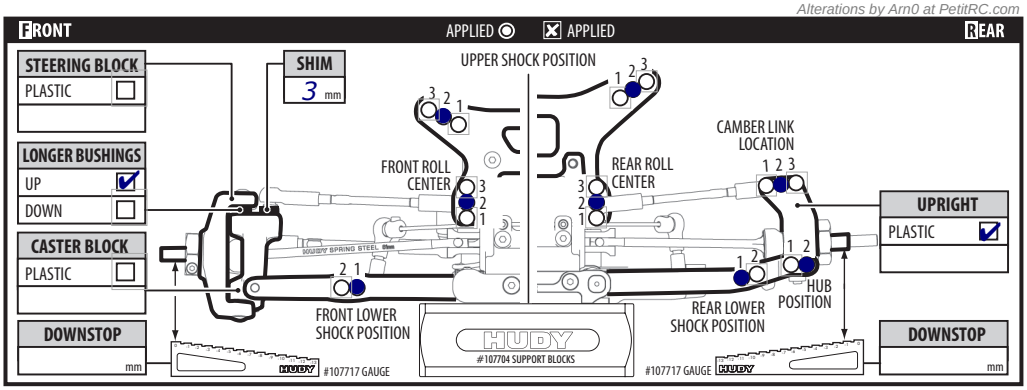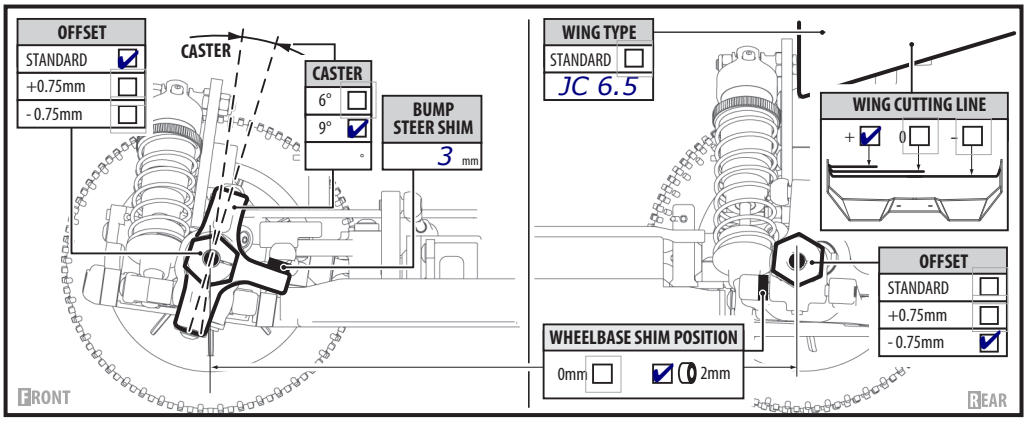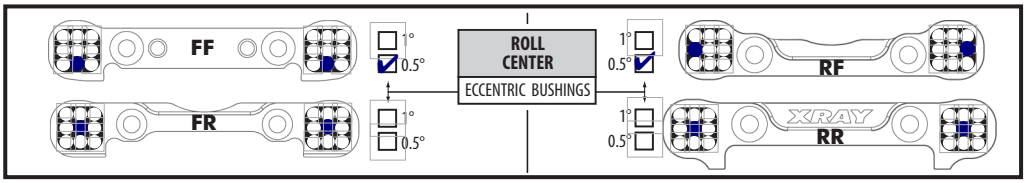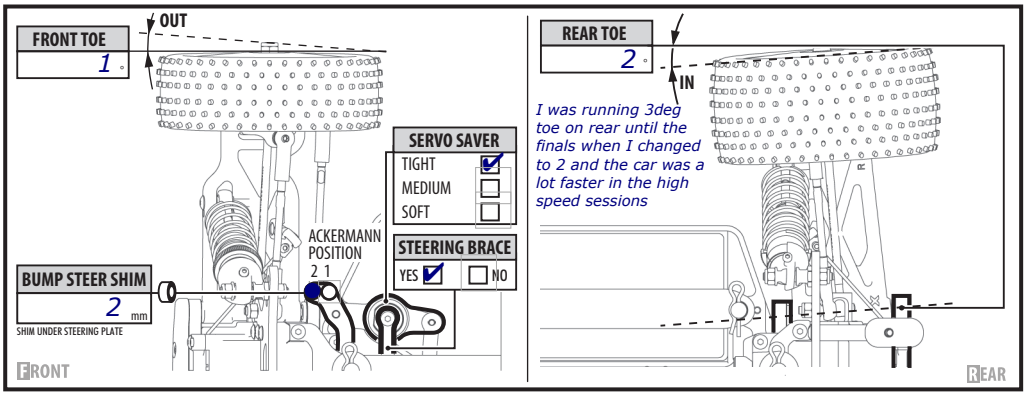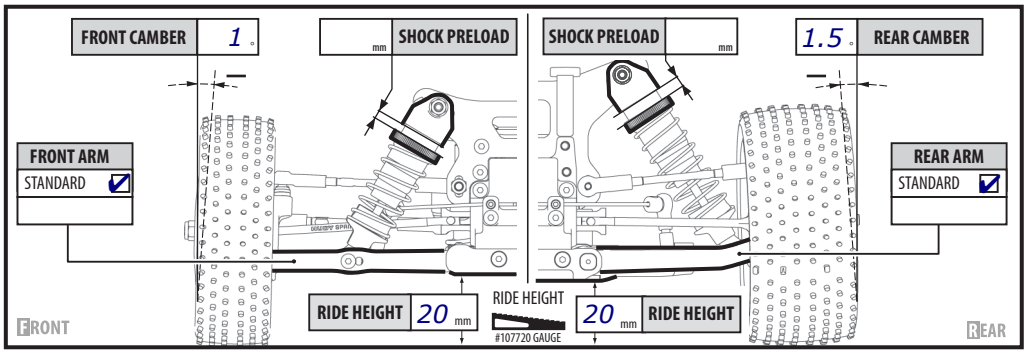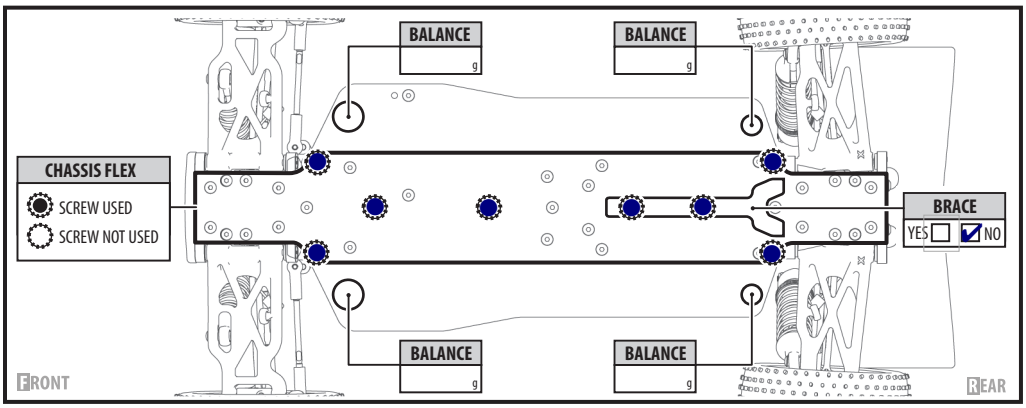
I would have liked to try 1.3mm bars all round but did not have them at the time. also I think 10000 in the rear would have worked well.