

MR-4BC SETTING SHEET

DATE: 2003 / 08 / 10


NAME: HIROSHI SUZUKI

TRACK: YATABE ARENA (2003 JAPAN NATS)

Ver.01

FRONT

GRAPHITE FRONT SHOCK TOWER (ZS-017BG)
STANDARD SHOCK CAPS (YS-8Y)



DRILL NEW
HOLE HERE

Camber -1.0°

Toe-In 0°

$-0^{\circ}+$

7 DEG CASTER
BLOCKS (ZM-4137)

Shock Type

ALUMINUM L.F. PRO SHOCKS

Shock Length mm

Spring Preload mm

Shock Spring WHITE

Shock Oil # 25 (ASSOC)


Shock Piston # RAYSPEED 1.0 X 2

Internal Spacer mm

RIDE HEIGHT: ARMS LEVEL

REAR

GRAPHITE REAR SHOCK TOWER (ZS-017BG)
STANDARD SHOCK CAPS (YS-8Y)

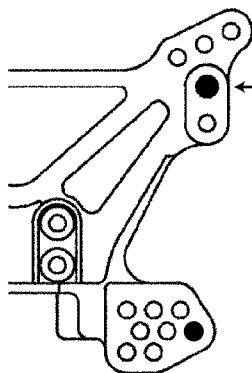

USE THE UPPER WING
MOUNT HOLE FOR THE
UPPER SHOCK MOUNT

Camber -0.5°

Toe-In 2.0°

$-0^{\circ}+$

DRILL NEW
HOLE HERE

Shock Type

ALUMINUM L.F. PRO SHOCKS

Shock Length mm

Spring Preload mm

Shock Spring WHITE

Shock Oil # 30 (ASSOC)

Shock Piston # RAYSPEED 1.2 X 3

Internal Spacer mm


RIDE HEIGHT: DOGBONES LEVEL

Anti-Roll Bar

☒ NONE ☐ mm




☐ Normal



☒ BC Special

☒ Upper Deck

☐ Standard

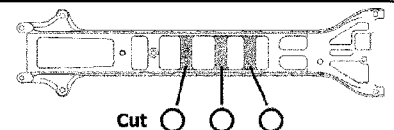


Cut ☐ ☐ ☐



☐ Direct Drive

☒ Center One-Way

☐ Center One-Way + Slipper Clutch



Tire F LOSI BLOCKHEAD (RED)

/R LOSI BK-BAR (RED)

Foam Insert F YOKOMO T16M

/R YOKOMO T16M

Wheel F YOKOMO AERO DISH (ZS-821P)

/R YOKOMO AERO DISH (ZS-821P)

MOTOR

MFG REEDY MODIFIEDS TYPE TI 9 DOUBLE

Spur & Pinion Gear 81 T / 16 T

BATTERY

ONi-Cd ☒ Ni-Mh GP 3300

ESC

MFG GM V12 Current MAX

USE SHORT SHOCK ENDS FOR THE FRONT SHOCKS.