

YZZ-4 SF

SETTING SHEET Ver.01

CIRCUIT




☐INDOOR ☐OUTDOOR
☐DIRT ☐ASTROTURF ☐CARPET ☐GRASS ☐WOOD
☐WET ☐DRY ☐DUSTY ☐SMOOTH ☐BUMPY
☐HARD PACKED ☐CLAY ☐BLUE GROOVE ☐_____
☐LOW TRACTION ☐MED TRACTION ☐HIGH TRACTION

DRIVER

DATE


FRONT

◆CAMBER ☐↔☐ _____ °
 ◆TOE ☐IN ☐OUT _____ °
 ◆RIDE HEIGHT _____ mm

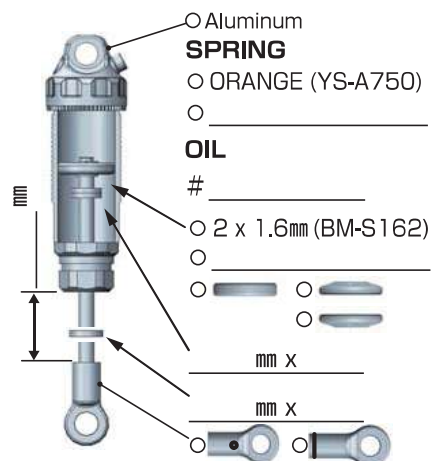
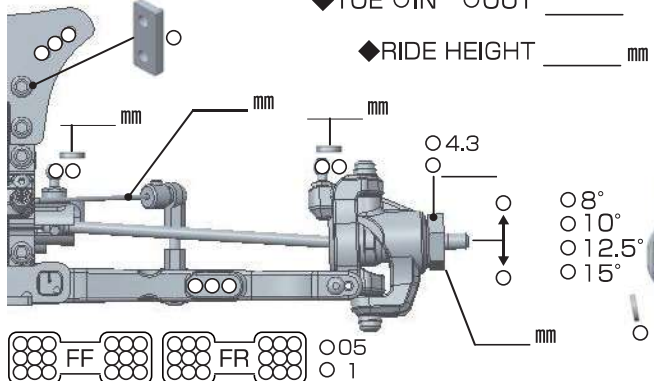


REAR

◆CAMBER ☐↔☐ _____ °
 ◆RIDE HEIGHT _____ mm

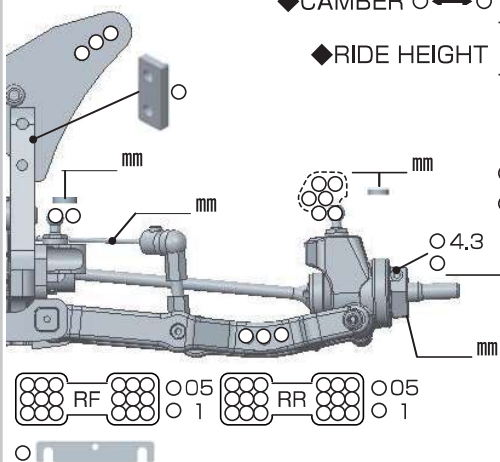


OZ2-415R
 OZ2-415R00 (Aluminum)

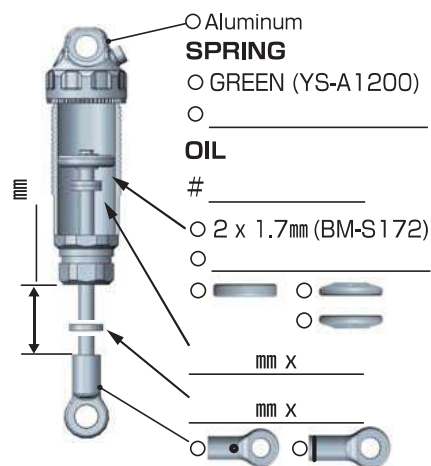

DRIVE



MOTOR ➔ _____ Rotor _____ mm
 GEAR ➔ Spur T / Pinion T : ☐ 2.5 / ☐ 2.35
 BATTERY ➔ _____
 ESC ☐ YOKOMO RPX ☐ YOKOMO BL-PRO4
☐ _____

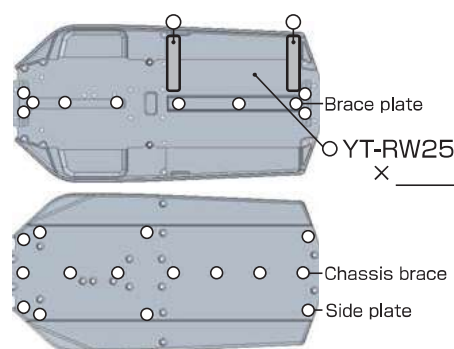

TIRE


FRONT

TIRE ➔ _____
 INSERTS ➔ _____
 WHEELS ➔ _____

REAR

TIRE ➔ _____
 INSERTS ➔ _____
 WHEELS ➔ _____

OTHER

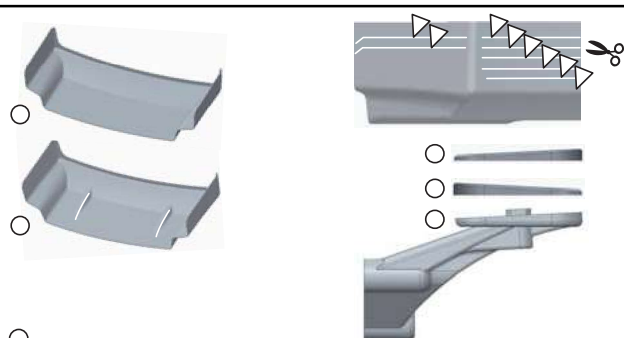

COMMENT