

Driver: Andy Murray Track: Mendip Event: Brca National R3 2023
 Date: 14/6/23 Qualifying: 1 (16:318.47) Final: 1 Best Lap: 19.68

TRACK TYPE

Grip Level High Medium Low
 Type Tight Open Mixed
 Condition Flat Bumpy Mixed
 Surface Tarmac (Asphalt) Carpet
 Track Temp 20 °C
 Weather

Notes:

TYRES


Tyres Ride BRCA used/old
 Cleaner red
 Additive red
 Additive Time Front: 20 mins Rear: 20 mins
 Heating Time Front: 15 mins Rear: 15 mins
 Heating Temp Front: 65 °C Rear: 65 °C

Notes:

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.2 mm
 Camber 2.0 deg
 Droop 21.6 mm
 Castor 5.0 deg
 Toe -1.0 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot
 Diff Height H L
 Diff Oil 300k cSt
 Servo Horn Height 18 mm Saver
 Steering Travel 25 in out

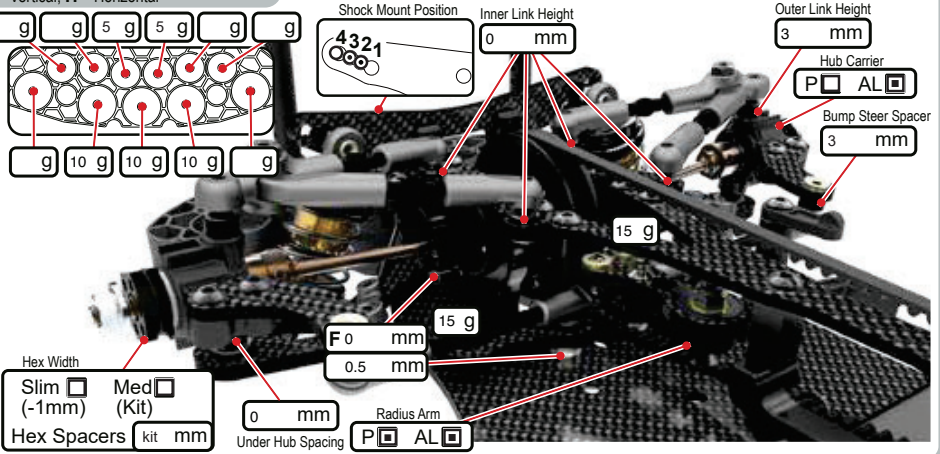


Notes:

REAR


KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, Ti = Titanium, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.6 mm
 Camber 2.0 deg
 Droop 20.6 mm
 Castor 3.0 deg
 Toe 2.0 static deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot

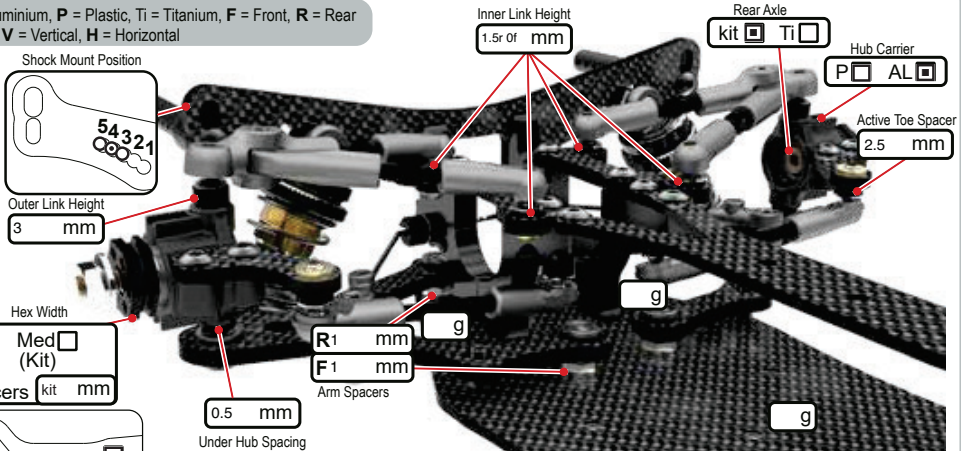

Notes:

anti squat upper links 1.5r of spacing



BODYSHELL

Body YRS
 Wing Std lower line
 Wing Height mm
 Front Height mm
 Body Stopper Y N
 Stopper Height med mm
 Body Weight g
 Rear Posts V H
 Body Offset Fwrd mm
 Wing Offset Rwrld 0 mm

Notes:

CHASSIS

Chassis CF
 T Brace Y N
 Motor Mount Screws 1 2 3 4
 Rear Front
 Total Weight 1256 g
 Weight Distribution F : R

Notes:

-Centre T brace screws
 -Rear Post fitted in rear hole
 -removed front motor mount screw

ELECTRONICS

E.S.C. Hobbywing control justock
 Servo Highest 750
 RX Sanwa
 LiPo 4900 LRP
 Motor Hobbywing ets 17.5
 Rotor Dia. Std mm
 Timing Fixed deg
 Gear Pitch 48 64
 Pinion t
 Spur t
 Ratio

SHOCKS

KEY: x = Stroke, e = external
 V = Vented (Drilled), S = Sealed

	FRONT	REAR
Cap Type	<input checked="" type="checkbox"/> V <input type="checkbox"/> S	<input checked="" type="checkbox"/> V <input type="checkbox"/> S
Body	<input type="checkbox"/> Kit <input checked="" type="checkbox"/> Kashima Coated	
Oil	400 cSt	400 cSt
Piston	4x1.1	4x1.1
Spring	Core RC Purple	Core RC Grey
Length (x)	9 mm	9 mm
Rebound	1 mm	1 mm
Limiters (e)	No mm	No mm

Notes: