

Driver: Broc Champlin Date: 6/24/2026 Event/Track: JConcepts INS @ Island Speedway
Qualify: 3rd Final: 3rd Best Lap: n/a

TRACK TYPE

Grip Level ☒ High ☐ Medium ☐ Low ☐
Type ☐ Tight ☐ Open ☐ Mixed ☐
Condition ☐ Flat ☐ Bumpy ☐ Mixed ☐
Surface ☐ Clay ☐ Long Astro ☐ Carpet ☐
☐ Grass ☐ Short Astro ☐ Mixed ☐
Weather 68-73 F

TYRES

	FRONT	REAR
Tyres	JConcepts Pin Swag	JConcepts Nessi
Wheels	JConcepts Mono	JConcepts Mono
Inserts	None	Grey

Notes:

Front sidewalls glued half way up the small ribs between the big ribs.

Notes:

Whitz Racing Products
- HyperGlide Ceramic Bearings
- HyperMax Titanium Turnbuckles
- HyperLite Titanium Screws

FRONT SUSPENSION


KEY: P = Plastic, A = Alloy, B = Brass, CF = Carbon Fibre, S2 = Schumacher Composite, M = Medium, S = Stiff, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = No

Ride Height 13.5 mm
Wheelbase 0 ☐ +1.5 ☐ +3.0 ☐ +4.5 ☐
Toe 1 deg In ☐ Out ☐
Camber at Ride Height -1.5 deg
Anti Roll Bar 0.9 ☐ 1.0 ☐ 1.1 ☐ 1.2 ☐
Front Wing Y ☐ N ☐
Bump Steer Washers 0 mm
Pivot Block Height H ☐ M ☐ L ☐
Steering Arm Kit ☐ A ☐ B ☐ C ☐

Notes:

USE OUTER FRONT BALLSTUD ON INNER TO ACHIEVE 5MM OF LINK HEIGHT

FLAT FRONT SERVO MOUNT

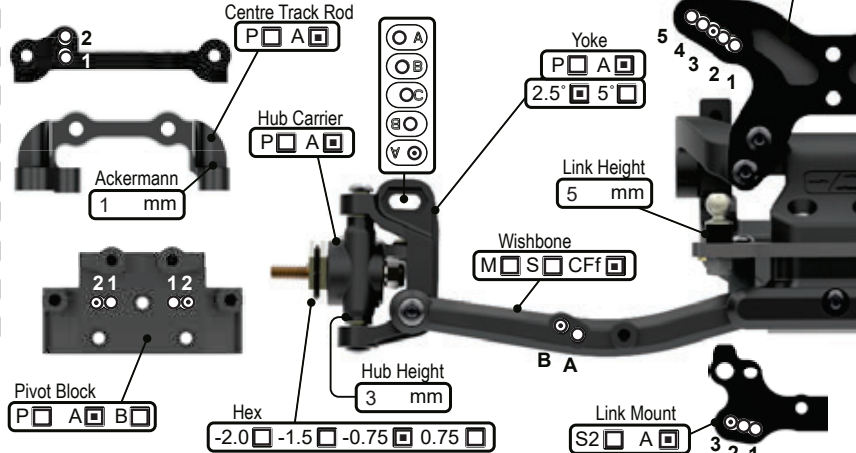


REAR SUSPENSION

KEY: P = Plastic, A = Alloy, B = Brass, CF = Carbon Fibre, S2 = Schumacher Composite, M = Medium, S = Stiff, Sh = Short, H = High, L = Low, F = Front, R = Rear, Y = Yes, N = No

Ride Height 13.5 mm
Wheelbase 0 ☐ +2 ☐ +4 ☐ +6 ☐
Anti-Squat 1° ☐ 2° ☐ 3° ☐ 4° ☐
Toe 4° ☐ 3.5° ☐ 3° ☐ 2.5° ☐ 2° ☐ 1.5° ☐ 1.0° ☐ 0.5° ☐
Camber at Ride Height -1.5 deg
Anti Roll Bar 1.0 ☐ 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4 ☐
Wing Gurney Height mm
Rearward Shock Position Y ☐ N ☐
Driveshaft Type CVD ☐ U/J ☐
Gearbox Type Laydown ☐ Layback ☐

5 GEAR TRANSMISSION

Notes: -3MM REAR TOWER / MIDDLE HOLE

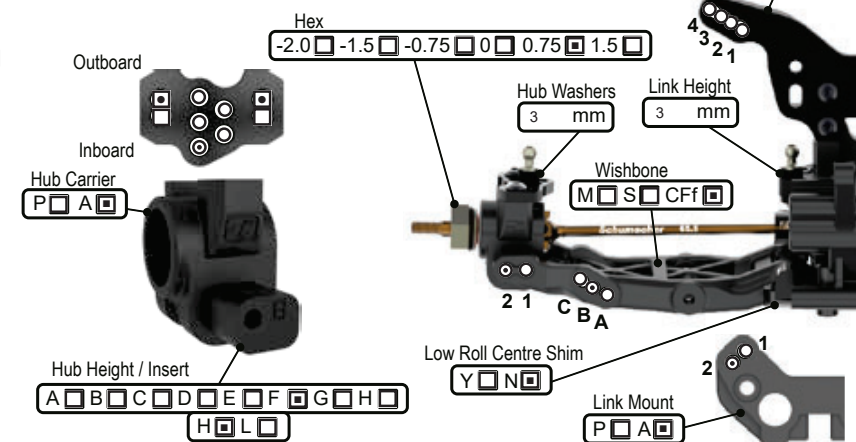

TRANSMISSION

B = Ball, 2g = 2 Gear, 4g = 4 Gear

Diff Height H ☐ M ☐ L ☐
Diff Oil 80,000 cSt
Diff Type B ☐ 2g ☐ 4g ☐
Motor HOBBYWING 5.0
Rotor Dia. 12.3 mm
Timing 32 deg
Pinion 23 t
Spur 80 t
Motor Plate A ☐ CF ☐
Lock Out Y ☐ N ☐
Slipper Plates 2 ☐ 3 ☐

CHASSIS

Chassis A ☐ C/F ☐
Chassis Insert 0mm ☐ +5mm ☐
LiPo Position 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8 ☐
X Brace Y ☐ N ☐
Running Weight 1479 g
Radio Tray 1 ☐ 2 ☐ 3 ☐

Notes:

HIGH PERFORMANCE SLIPPER PADS

EQUIPMENT

E.S.C. HOBBYWING G3X
Servo SAVOX 3292
RX FLYSKY
LiPo GENSACE 4400
Bodyshell JCONCEPTS

WEIGHTS

Chassis F ☐ R ☐
Rear Strap F ☐ R ☐
Radio Tray Y ☐ N ☐
Under LiPo Y ☐ N ☐

SHOCKS

KEY: i = Internal, e = External, V = Vented, S = Sealed, A = Aeration

	FRONT	REAR
Cap	V ☐ S ☐ A ☐	V ☐ S ☐ A ☐
Body	KASHIMA	KASHIMA
Oil	525 cSt	475 cSt
Piston	VRP 1.7 (RED)	VRP 1.9 (RED)
Spring	CORE BLK lb/in	CORE BLK lb/in
Limiters (i)	0 mm	2 mm
Stroke	23.5 mm	26.8 mm
Limiters (e)	4 mm	1 mm

Notes:

BLEED SHOCKS TWICE FOR NO REBOUND

