

DRIVER AND EVENT DETAILS

Name **MARC MCGURREN**
Date **3/12 THRU 3/16 2008**
Event **2008 ROAR NATIONALS**
Weather **IRRELEVANT**
Result **Good**

CHASSIS AND ELECTRICS

Chassis **M13 CARPET**
Top Deck **Flex Standard Stiff**
Bodyshell **PARMA MOHAWK LW**
Wing **SAME**
E.S.C **TEKIN FX**
Servo **FUBABA 9550**
Receiver **SPECTRUM 2.4G**
Number of Cells **4 5 6**
Type of Cells

TRACK CONDITIONS

Grip Level **High Medium Low**
Track Type **Tight Open Both**
Surface **Carpet Tarmac Wood**
Venue **Indoor Outdoor**
Track Condition **Smooth Bumpy**
Track Temperature **°C °F**



DRIVER NOTES

- KIMBROUGH LARGE SAVER
- 6.0FT TURNING CIRCLES
- 2.0MM BUMPS/STEER USED AT KNUCKLE
- CARPET TOWERS USED (F/R)
- TAMALE/XRAY 1" ALUMINUM REAR HUBS
- TAMALE 5" ALUMINUM C-HUBS

MOTOR AND GEARING

Type **Brushed Brushless**
Motor **STOCK**
Brush
Spring
Timing
Gear Pitch **48Dp 64Dp**
Spur Size **35T**
Pinion Size **116T**


WHEELS, TYRES AND INSERTS

Wheels **PARMA PRO-53, 56.0MM**
Tyres **PARMA MAGENTA (3/4 WET FRONT)**
Inserts
Tyre Additive **JTG**
Additive Time **12 MIN (R) 5 MIN (F)**
Tyre Warmers **Yes No**

FRONT SETTINGS



Drive **Diff Spool One-Way Height **High Low****

Servo Saver **Yes No**
Toe In-Out **In-board Out-board 1.0 ° Toe-out**
Screw Block Spacers **Front 2.5 mm Rear 2.5 mm**
Wishbone Quik-Klips **Front 2 mm Rear 2 mm**
Link Washers (Horizontal) **4.0 mm**
Ride Height (Chassis to Floor) **4.0 mm**
Droop (Chassis to Floor) **5.5 mm**
Anti-roll Bar **Yes No 1.20 1.40 1.60**
Caster **0° 2° 4° 6°**
Camber **Positive Negative 1.5 Deg**
Link Washers (Vertical) **3.0 mm**
Inboard Pin **Kick-up Anti-dive Horizontal**
Pivot Block Spacers **Front 2.0 mm Rear 2.0 mm**

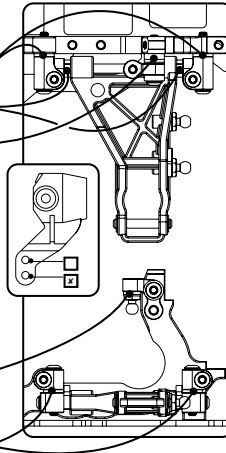


Front Shocks

Oil **60 WT**
Springs **AE YEL**
Piston Holes **2 3**
length **N/A**
Rebound **80 %**




Centre Track Rod



REAR SETTINGS



Drive Height **High Low**

Toe In **In-board 0.5 ° Out-board 1.0 ° 1.5 °**
Screw Block Spacers **Front 2.75 mm Rear 0 mm**
Wishbone Quik-Klips **Front 4.0 mm Rear 0 mm**
Link Washers (Horizontal) **4.0 mm**
Ride Height (Chassis to Floor) **4.0 mm**
Droop (Chassis to Floor) **6.0 mm**
Anti-roll Bar **Yes No 1.20 1.40 1.60**
Camber **Positive Negative 2.5 Deg**
Link Washers (Vertical) **4.0 mm**
Inboard Pin **Pro-Squat Anti-Squat Horizontal**
Pivot Block Spacers **Front 3.0 mm Rear 3.0 mm**

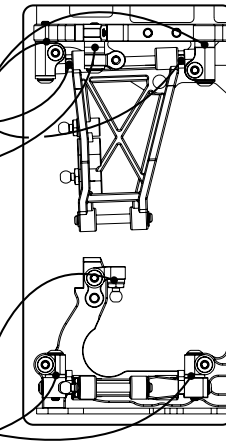

Rear Shocks

Oil **40 WT**
Springs **AE BLUE**
Piston Holes **2 3**
length **4-HOLE PISTON**
Rebound **80 %**



Driver Notes

- REAR HEX SPACERS ADDED TO GET TO 189MM
- 20% EXPO (NEGATIVE)