


NAME **Mark Stiles**
 COUNTRY **UK**
 RACE **BRCA Nationals R1 & R2**
 TRACK **Eastbourne**

DATE **21-22/01/2023** TEMPERATURE AIR / TRACK **18 °C** / °C
 ASPHALT OUTDOOR INDOOR CARPET
 TRACK CONDITION BUMPY FLAT TECHNICAL MIXED FAST
 TRACTION LOW MEDIUM HIGH

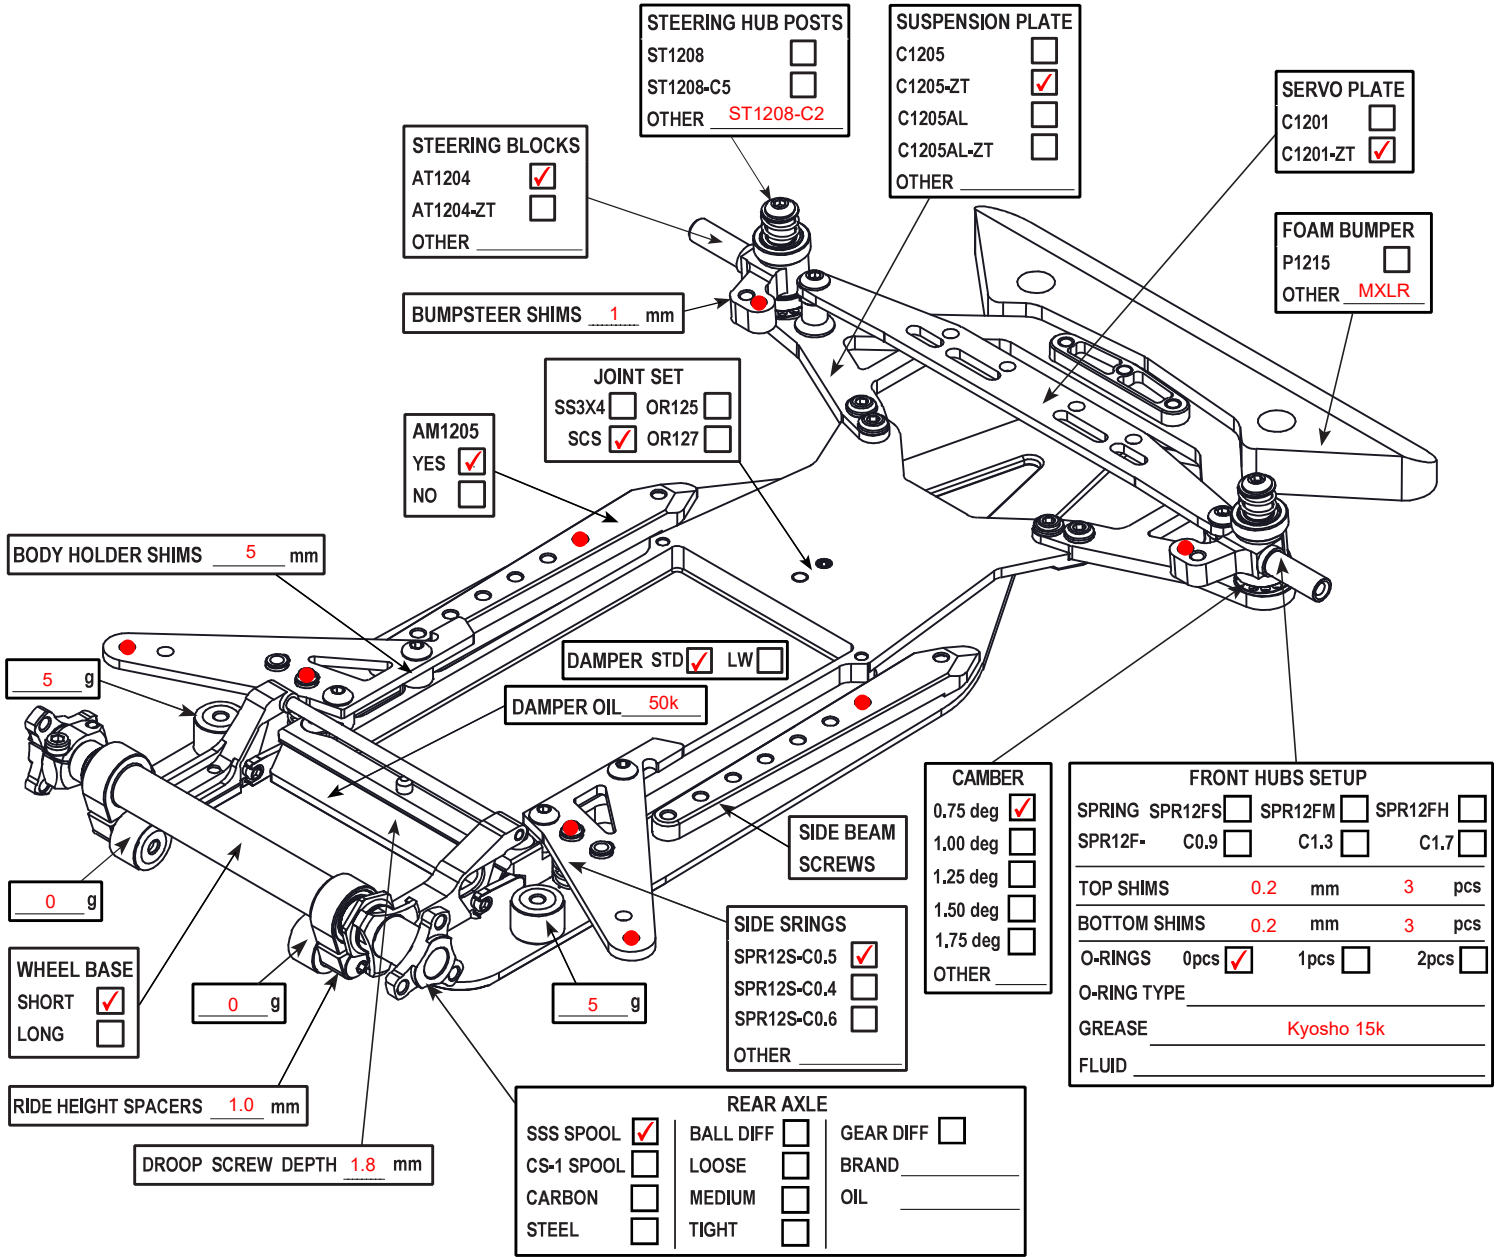

RIDE HEIGHT		FRONT DROOP	
FRONT (FRH)	3.4 mm	FRONT DROOP	0.3 mm
UNDER DAMPER (DRH1)	mm	REAR DROOP	0.50 mm
UNDER DAMPER (DRH)	4.5 mm	TRACK WIDTH	
REAR (RRH)	3.6 mm	FRONT	167.5 mm
		REAR	171 mm

SERVO	MKS HV-50P	BATTERY	EA 7500
SERVO SAVER	Xray	BATTERY PLUGS	FRONT <input checked="" type="checkbox"/> BACK <input type="checkbox"/>
TOE OUT	1°	SERVO POSITION	LEFT <input type="checkbox"/> RIGHT <input checked="" type="checkbox"/>
STEER. TRAVEL	IN ° OUT °	ESC POSITION	LEFT <input checked="" type="checkbox"/> RIGHT <input type="checkbox"/>

TIRES	FRONT	REAR	FRONT REAR	
BRAND	Ulti	Ulti		
TYPE	X-Medium	X-Medium	FRONT	REAR
DIAMETER	40.8 mm	41.2 mm		
ADDITIVE	Spider Blue	Spider Blue	TIME 5 min	TIME 60 min

MOTOR	Xfactor 13.5	TOTAL WEIGHT	735 g
SPUR 76 PINION 40 ROLLOUT 68.12		F/R WEIGHT DISTRIBUTION	%
BODY	BlackArt BA010 0.5	RECEIVER	KO
ESC	Hobbywing XR10 1S 120A	RADIO	KO
ESC SETTING	Blinky		
BEST LAP TIME	12.69	QUALIF./ FINAL POSITION	A3 / A2

COMMENTS:
SB3X7AL Rear Wheel Bolts, C1.1 front springs, 10g Battery Weight, additional 1.0 mm shim on top of steering post to achieve front droop. Sagami Type B servo saver plate with 2mm spacers. 85% steering lock.
Gap under rear edge of side rails - 2.2mm. Damper checker setting 105 (50k, no o-rings).