

Driver: Andy Murray Track: Bedworth WET Event: BRCA National Round 1 WET Setup (qual)  
Date: 1/5/2022 Qualifying: 1st Final: 2nd Best Lap:

### TRACK TYPE

Grip Level High ☐ Medium ☐ Low ☐  
Type Tight ☐ Open ☐ Mixed ☐  
Condition Flat ☒ Bumpy ☐ Mixed ☐  
Surface Tarmac (Asphalt) ☒ Carpet ☐  
Track Temp cold and wet °C  
Weather

Notes: rained during qual, dry finals

### TYRES

Tyres xg-rain v3.1  
Cleaner no  
Additive no  
Additive Time Front: mins Rear: mins  
Heating Time Front: 10 mins Rear: 10 mins  
Heating Temp Front: 70 °C Rear: 70 °C

### Notes:


-Using Kit Front steering arms

### FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear  
H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.8 mm  
Camber 1.5 deg  
Droop 21.4 mm  
Castor 4 deg  
Toe -0.75/side deg  
Anti Roll Bar 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4 ☐  
Upper Link Mount 0 dot ☐ 1 dot ☐  
Spool Height H ☐ L ☐  
Diff Oil (if applicable) cSt  
Servo Horn Height 17 mm Saver ☐  
Steering Travel in out

Notes:

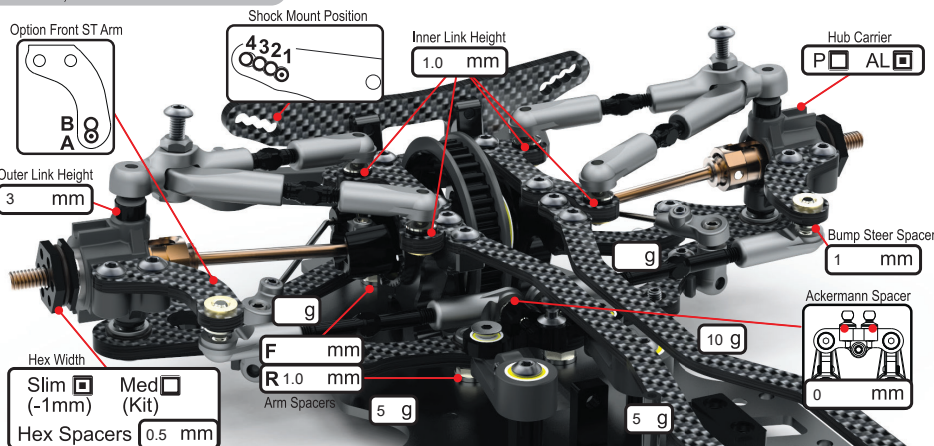


### REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear  
H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 6.5 mm  
Camber 1.5 deg  
Droop 20.4 mm  
Castor 4 deg  
Toe 3-3.5 deg  
Anti Roll Bar 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4 ☐  
Upper Link Mount 0 dot ☐ 1 dot ☐  
Diff Height H ☐ L ☐  
Diff Oil 3K cSt

Notes: 1700-1800 on Arrowmax Diff checker

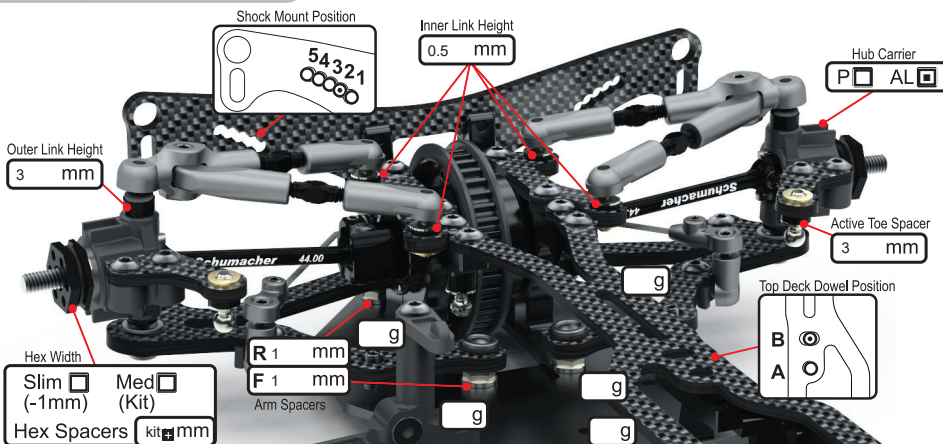

### BODYSHELL

Body Montech Zero LW  
Wing Xtreme Straight Wing  
Wing Height 115 mm  
Front Height 6 mm  
Body Stopper Y ☐ N ☐  
Stopper Height 5 mm  
Body Weight 60 g  
Rear Posts V ☐ H ☐  
Body Offset Fwrd 61 mm  
Wing Offset Rwrd 0 mm

Notes: Vertical posts

### CHASSIS

Chassis AL ☐ CF ☐  
Top Deck 2mm Kit ☐ 1.6mm ☐ 2 piece ☐  
T Brace Y ☐ N ☐  
Motor Mount Screws 1 2 3 4  
Rear ☐ ☐ ☐ ☐ Front  
Total Weight 1322 g  
Mass Damper F ☐ cSt R ☐ cSt  
Notes: 50:50 -10g front 1.6 topdeck

### ELECTRONICS

E.S.C. xr10 WP  
Servo sanwa 801  
RX rx481wp  
LiPo lrp 6700  
Motor 5.5T  
Rotor Dia. mm  
Timing 30 deg  
Gear Pitch 48 ☐ 64 ☐  
Pinion 21 t  
Spur 85 t  
Ratio

### SHOCKS

KEY: x = Stroke, e = external  
V = Vented (Drilled), S = Sealed

FRONT REAR  
Cap Type V ☐ S ☐ V ☐ S ☐  
Body Kit ☐ Kashima Coated ☐  
Oil 200 cSt 200 cSt  
Piston 1.1 kit 1.1 kit  
Spring Core RC Orange Core RC Purple  
Length (x) 9 mm 9 mm  
Rebound 8 mm 8 mm  
Limiters (e) 0 mm 0 mm

Notes: sealed